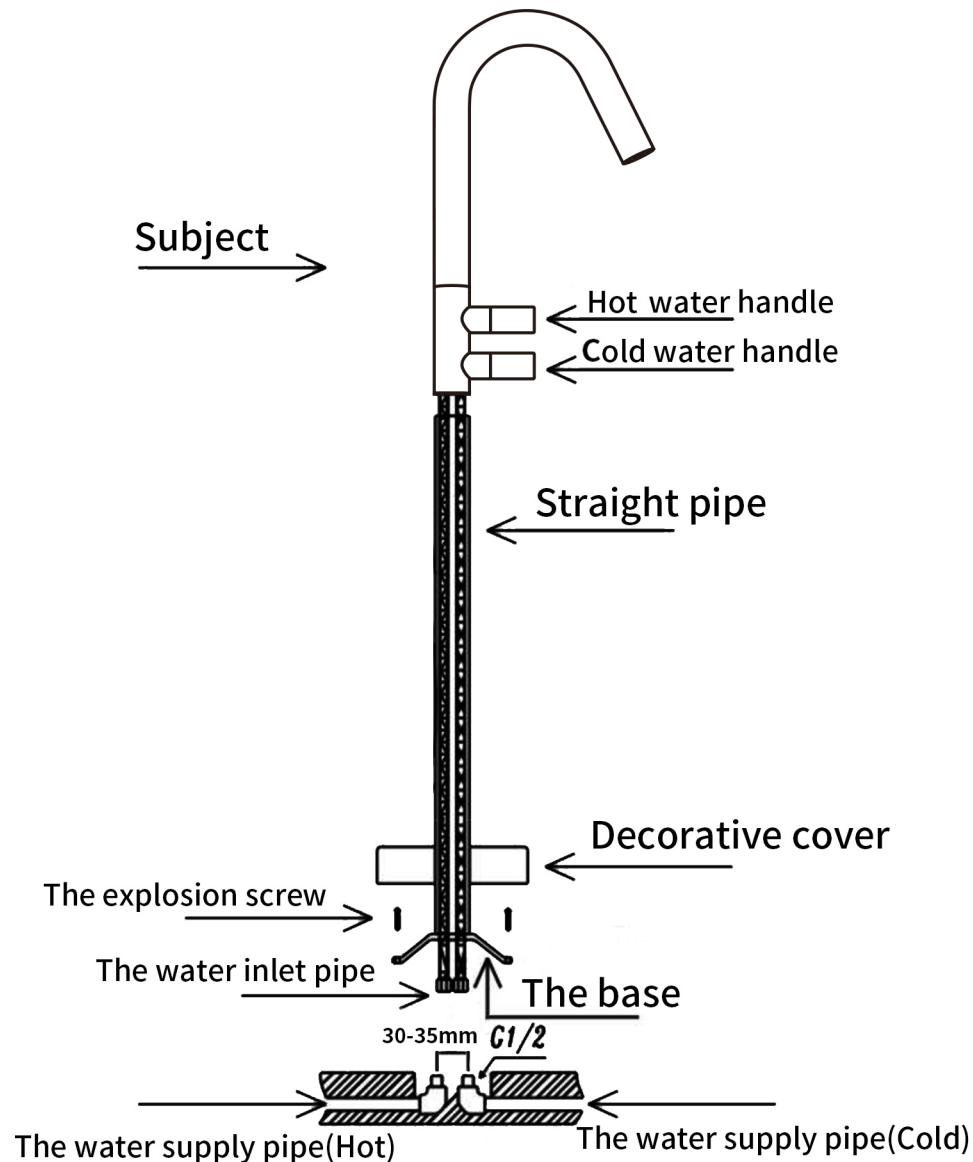


Presentation:

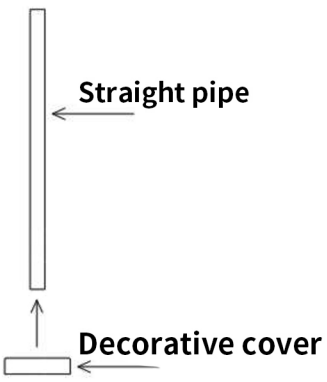
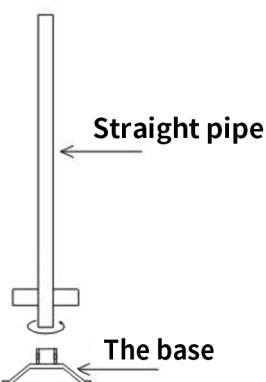
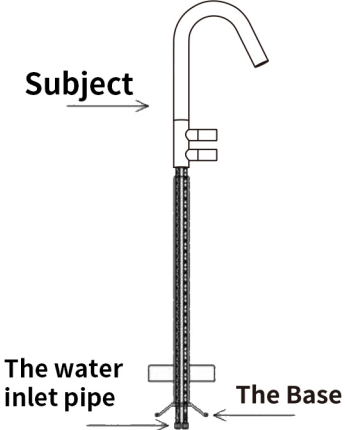
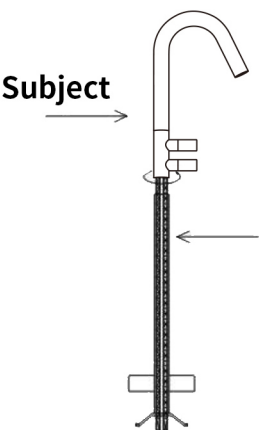
1. 360 degree swivel spout:
Faucet spout can be swivelled from one side to other side during use
2. Turn hot and cold water handles to right for turning water on
3. Turn hot water handle to right to get hot water
4. Turn cold water handle to right to get cold water
5. Turn hot and cold water handles to right to get mixer water

Caution:

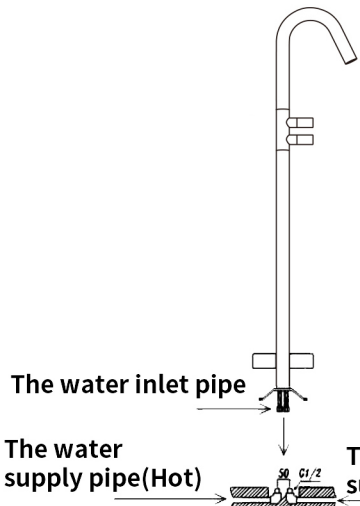
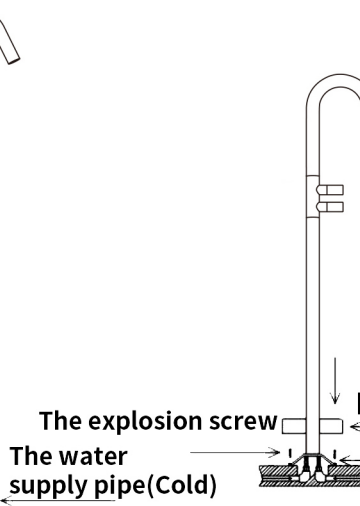
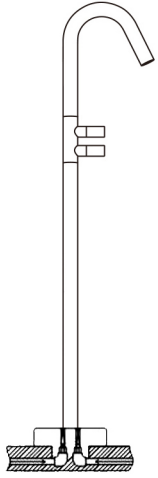

1. Before installation, all water lines must be flushed at least 60 seconds to remove any foreign material so that the foreign material will not block the areator or damage the cartridge
2. Use water and soft cloth to clean the faucet
3. Can use a mild liquid detergent for cleaning, do not use abrasive detergent that may scratch or dull the surface



Installation Steps:

- 
- 1. Put the decorative cover over the straight pipe**
- 
- 2. Screw the straight pipe to the base**
- 
- 3. Screw and hand tighten the water inlet pipe to the water inlets of the subject (DO NOT USE SPANNER TO TIGHTEN AS IT CAN DAMAGE THE O-RING) Make sure the water inlet pipe were screwed into the correct inlets for hot water and cold water**
- 
- 4. Screw the subject into the straight pipe**

Installation Instructions

- 
- 5. Connect another side of the water inlet pipe to the water supply pipe. Make sure they were screwed into the correct outlets for hot water and cold water**
- 
- 6. Use the explosion screws to fix the base on the ground, and put the decorative cover over the base**
- 
- 7. Check all connectors for leakage, re-tighten them if necessary**
- 
- 8. Installation finished**