



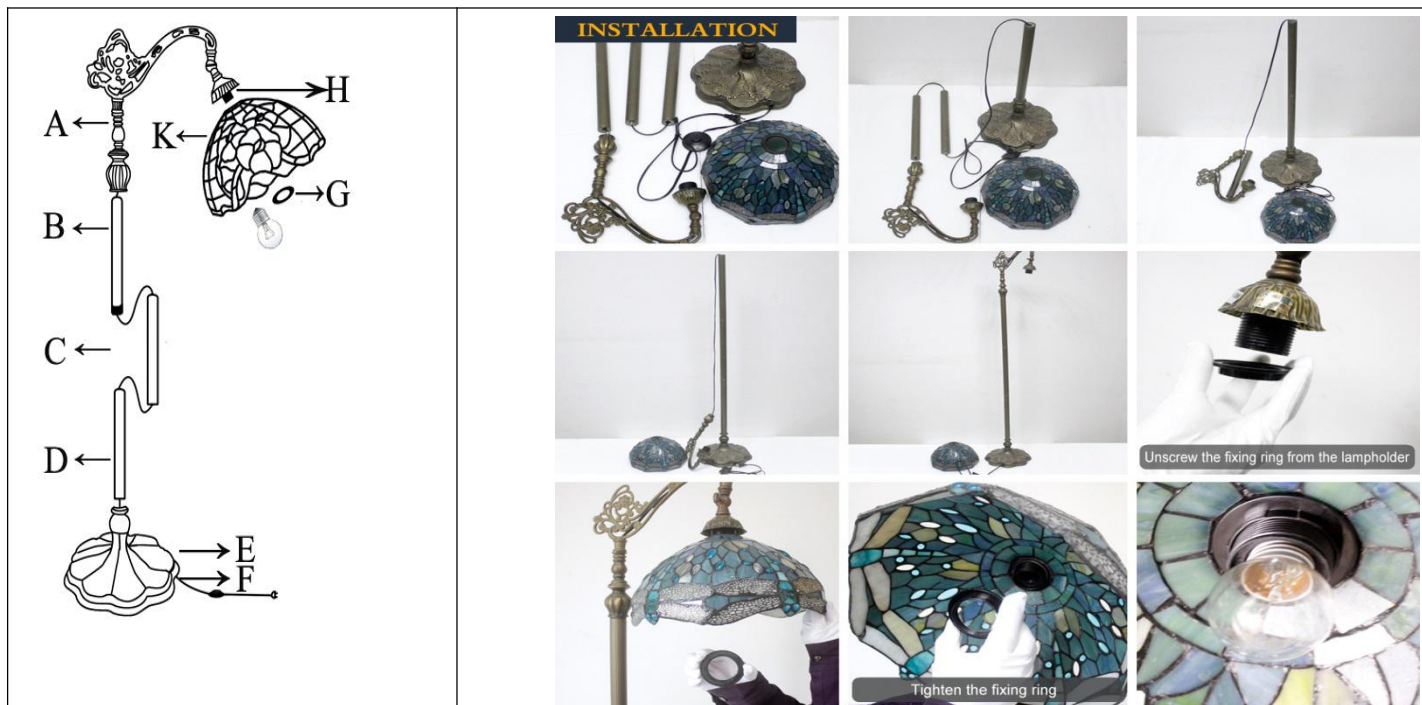

- 1: Put Wire slightly from Section F to allow working space for assembly
- 2: Carefully assemble the parts in order from D→C→B→A to the base E
- 3: **Take the ring G from the socket H . (Important)**
- 4: Put the lampshade K to the socket first, then assemble ring G to the socket to fixed the lampshade in tight.
- 5: Put the warm halogen bulb (MAX 100W) into socket, and test it whether it's working. If your bulb not working, first replace the bulb, and if it still doesn't work, please check whether the copper inside of the socket is pop-up.

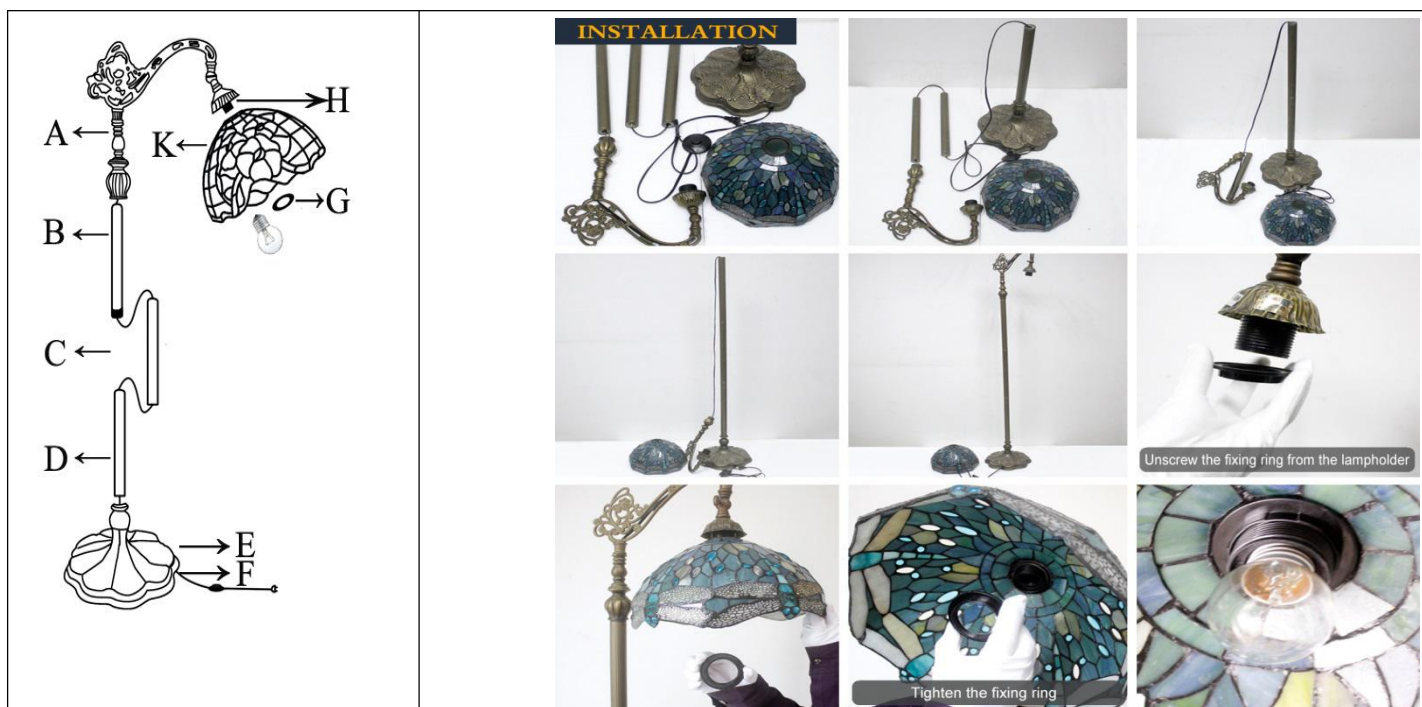

- 1: Put Wire slightly from Section F to allow working space for assembly
- 2: Carefully assemble the parts in order from D→C→B→A to the base E
- 3: **Take the ring G from the socket H . (Important)**
- 4: Put the lampshade K to the socket first, then assemble ring G to the socket to fixed the lampshade in tight.
- 5: Put the warm halogen bulb (MAX 100W) into socket, and test it whether it's working. If your bulb not working, first replace the bulb, and if it still doesn't work, please check whether the copper inside of the socket is pop-up.