

CAST ALUM. CLUB CHAIR






Please carefully follow the assembly instructions to ensure your furniture is assembled correctly to provide long lasting enjoyment.


Should you experience any missing or damaged parts, **do not return to the store.**

Care: Use a soft, clean cloth that will not scratch the surface when cleaning. The use of solvents is not necessary. Should you choose to use solvents, test in an inconspicuous area first to avoid damaging the finish. To clean, simply use a soft, clean cloth lightly dampened with water.

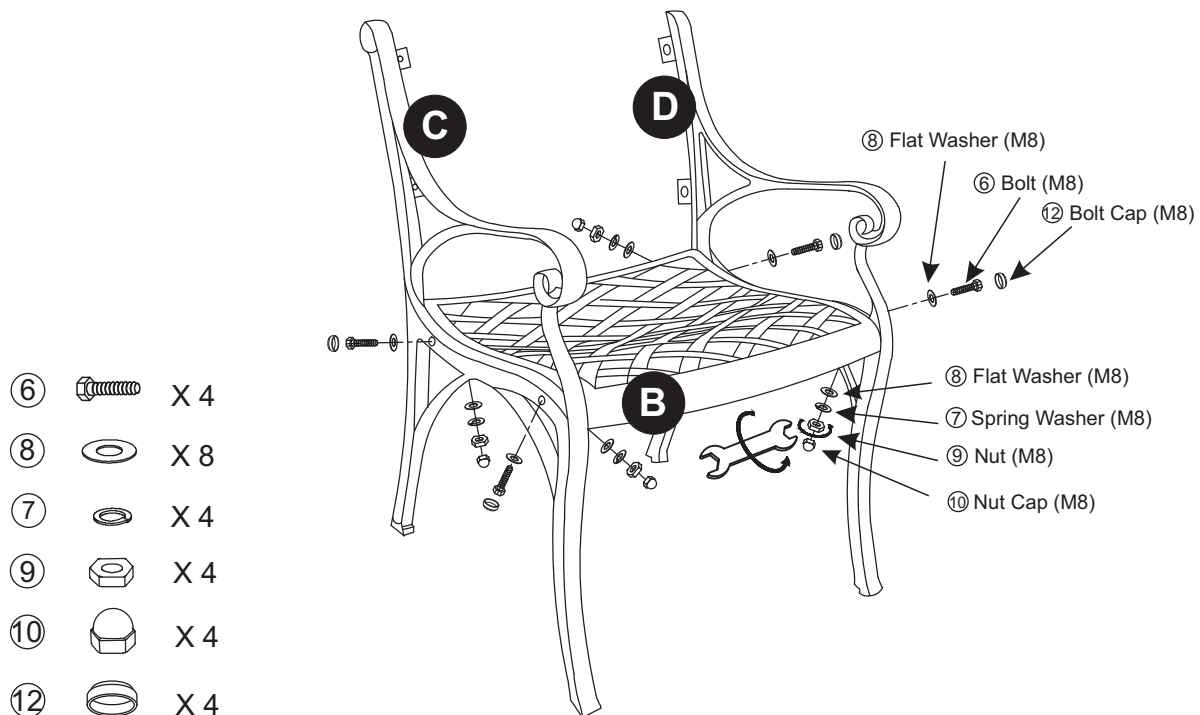
PARTS LIST

A	B	C	D
			
Back 1 PC	Seat 1 PC	Left Side Frame 1 PC	Right Side Frame 1 PC

HARDWARE LIST

1	2	3	4	5
				
Phillips Head Bolt (M6*30) 4 pcs	Spring Washer (M6) 4 pcs	Flat Washer (M6) 4 pcs	Nut (M6) 4 pcs	Nut Cap (M6) 4 pcs
6	7	8	9	10
				
Bolt (M8*30) 4 pcs	Spring Washer (M8) 4 pcs	Flat Washer (M8) 8 pcs	Nut (M8) 4 pcs	Nut Cap (M8) 4 pcs
11	12			
				
Wrench (M6 & M8) 1 pc	Bolt Cap (M8) 4 pcs			

Step 1: Attach Side Frame (C & D) to seat (B) With Bolts (Part #6), Flat Washers (Part #8), Spring Washers (Part #7) & Nuts (Part #9).Note - Do not tighten Nuts (Part #9) fully at this time.Cover M8X30 mm bolts (Part #6)with bolt caps (Part #12).



Step 2: Attach Back (A) to unit with Phillips Head Bolts (Part #1), Flat Washers(Part #3), Spring Washers (Part #2), and Nuts (Part #4). Tighten all bolts of the chair completely. Cover all Nuts with Nut Caps (Part #5).

