


# WALL MOUNTED DOUBLE HUNG CLOTHING RACK

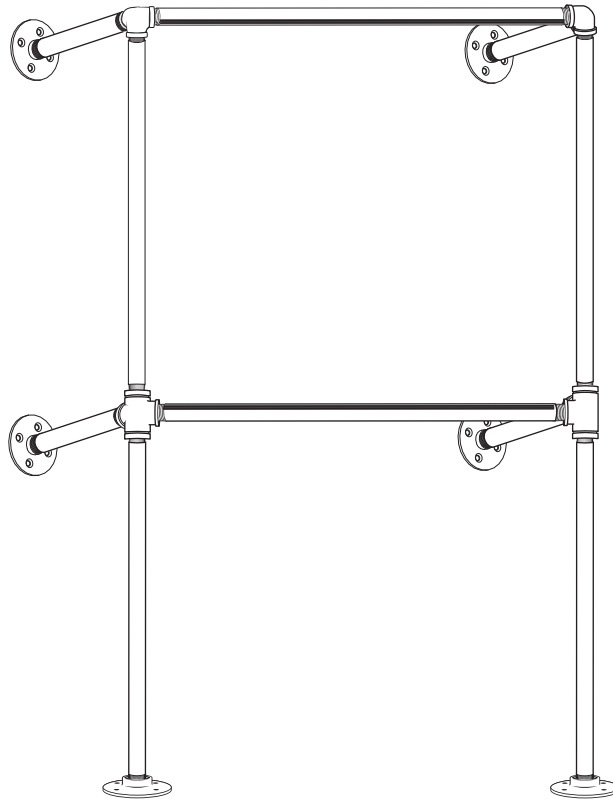

## HOW TO PREVENT PIPE CORROSION

Our industrial-grade black pipes and fittings are coated with a rust-preventive oil during manufacturing. For best results, **SEAL THE PIPES TO AVOID ANY RUSTING** after cleaning the kit.

### **CLEAN AND SEAL INSTRUCTIONS:**

**CLEAN:** Recommended supplies: regular degreasing dish soap, washcloths, gloves (optional)  
1. Wash your pipes and fittings with warm water and dish soap until the oil is completely removed.  
2. Wipe the pipes with a dry washcloth and wait until the pipes are completely dry.

**IMPORTANT: THE PIPES MUST BE COMPLETELY DRY BEFORE YOU START THE SEALING PROCESS.**

### **SEAL:**

**IF USING POLYURETHANE SPRAY:** Spray each dry pipe and fitting with a polyurethane matte or satin finishing spray and let it dry before assembling the kit.

**IF USING FINISHING WAX:** Coat each dry pipe with a finishing wax. Wait for 20 minutes, then polish the pipe with a dry washcloth by wiping them down. Faster wiping will result in a shinier finish.


# WALL MOUNTED DOUBLE HUNG CLOTHING RACK

EASY INSTALLATION: —


RECOMMENDED TOOLS FOR INSTALLATION




## STEP 1

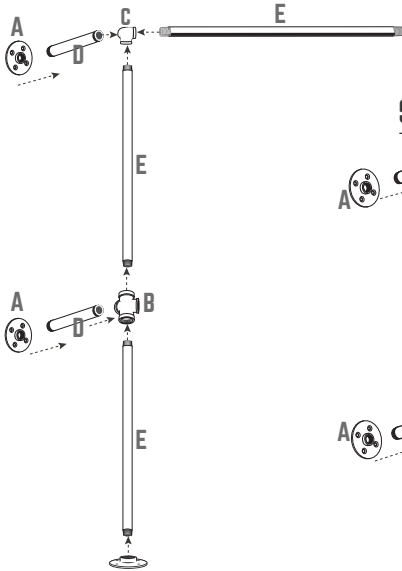

## STEP 2

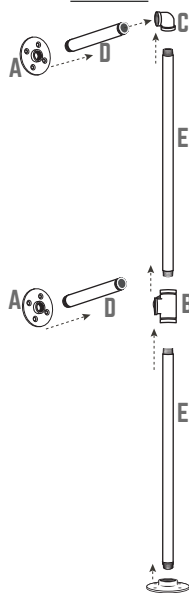


## STEP 3

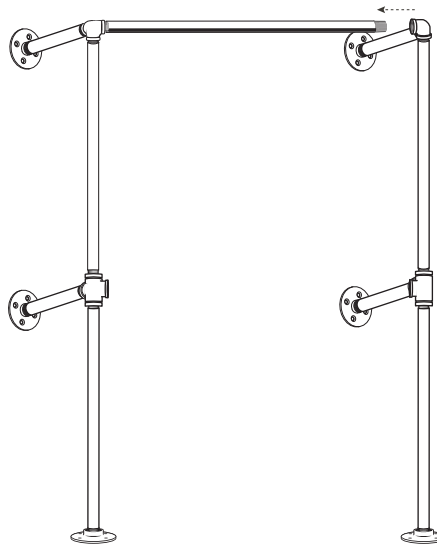


## STEP 4

- 1 ➡ Hand tighten E into B as hard as you can.
- 2 ➡ Then unscrew the E (in 1) into the the opposite B (in 2). It will be loose, but the connection is good.

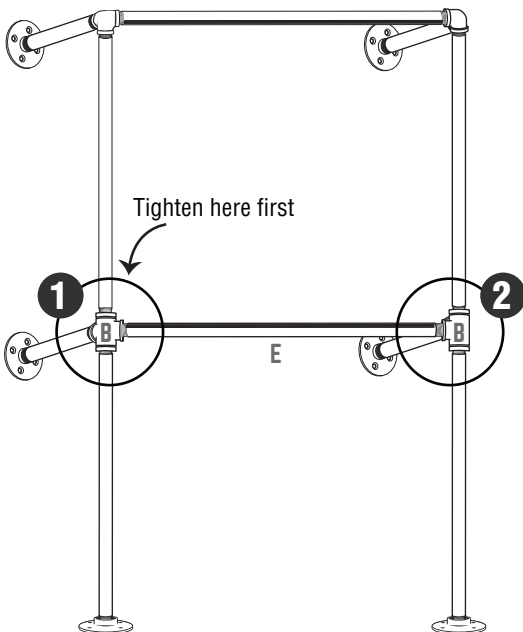

## STEP 5



- Place flange against wall in desired location and mark holes with pencil
- Using stud finder, locate and mark wall stud if found
- **If a wall stud is present**, attach flange to wall with included screws
- **If no wall stud is present:**
  - A) Drill pilot holes in wall using 1/4" drill bit
  - B) Insert anchor fully into pilot hole using hammer and Phillips screwdriver as needed
- Attach flange to wall using included screws

| PART | DESCRIPTION        | QTY |
|------|--------------------|-----|
| A    | 1/2" FLANGE        | 6   |
| B    | SIDE OUT TEE       | 2   |
| C    | SIDE OUT 90° ELBOW | 2   |
| D    | 12" NIPPLE         | 4   |
| E    | 36" NIPPLE         | 6   |
| F    | SCREWS/ANCHORS     | 16  |