
Installation & Assembly

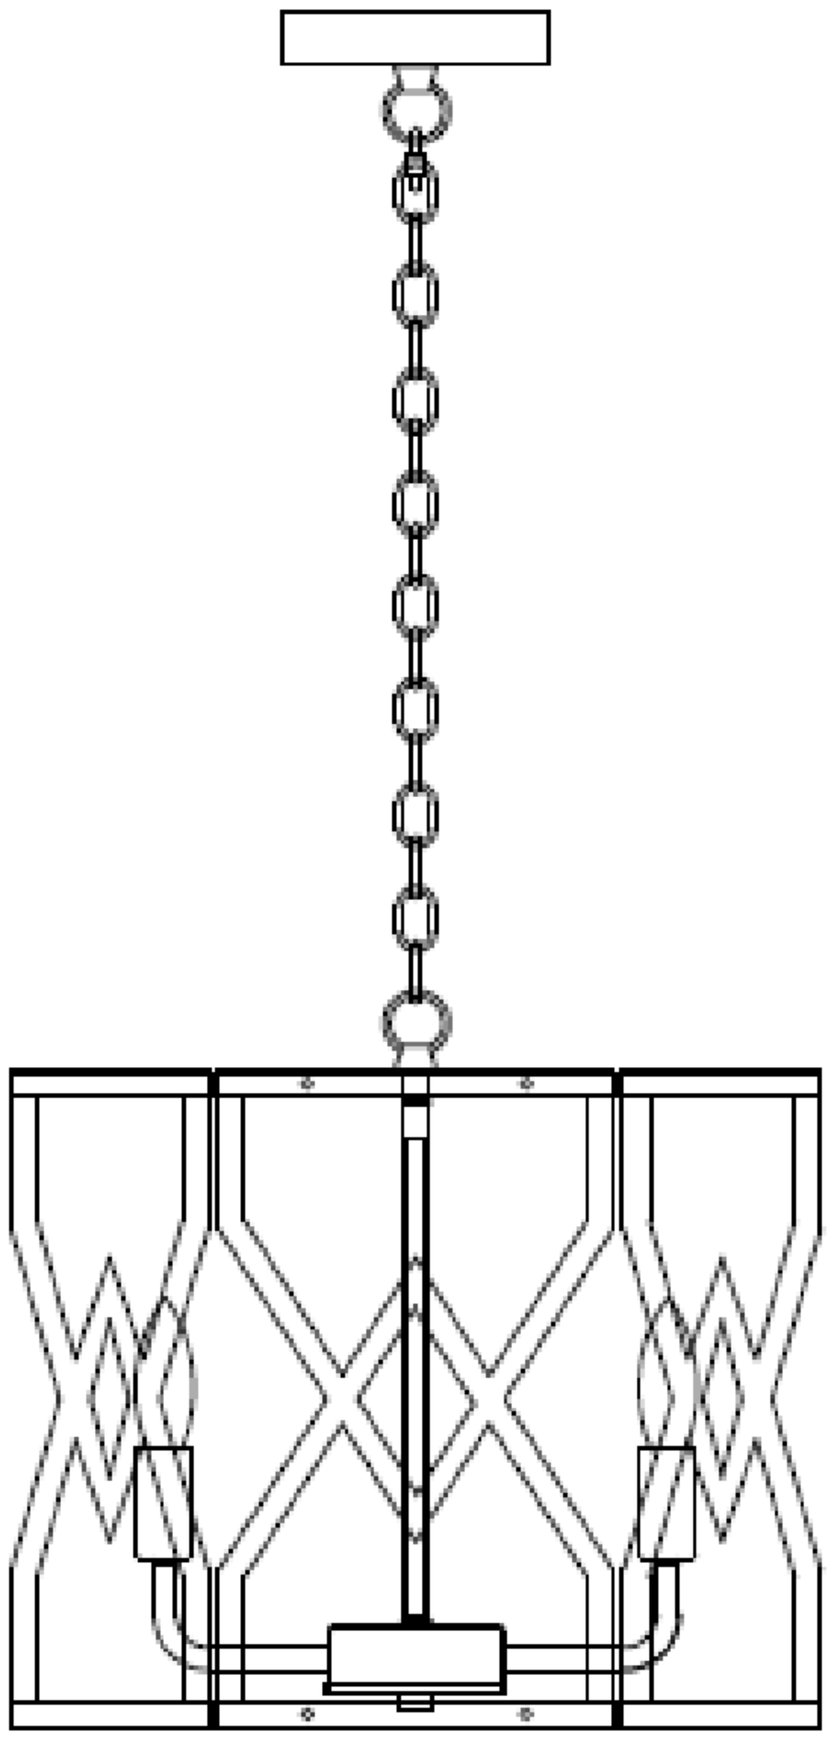

*Read this manual before using the product, and keep it for future reference.

WARNING:

- We suggest installation by a licensed electrician.
- Please read the instructions carefully and save them as you may need them at a later time.
- Before you start, NEVER attempt any work without shutting off the electricity until the work is done.


A). Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the"OFF" position.


B)Place the wall switch in the"OFF" position.


- Secure mounting: The fixture must be securely mounted to a stable surface. The wall or mirror should support the weight of the fixture and ensure stability.
- Maintain proper clearance: Ensure the fixture is installed with adequate clearance from other surfaces to avoid overheating or obstructing light.
- Ensure that the light fixture is connected to the appropriate voltage and frequency (e.g., 120V ~ 60Hz). Using the wrong voltage can lead to damage or potential hazards.
- Keep the lamp away from acidic objects in case of damaging the surface of the lamp.
- When replacing the bulb, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.
- Safe bulb replacement: Always turn off the power and allow the bulbs to cool before replacing them to prevent burns or electric shock.
- The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur.

It must be understood that common sense, caution, and care must be used with any electrical products.

Image for finished product:

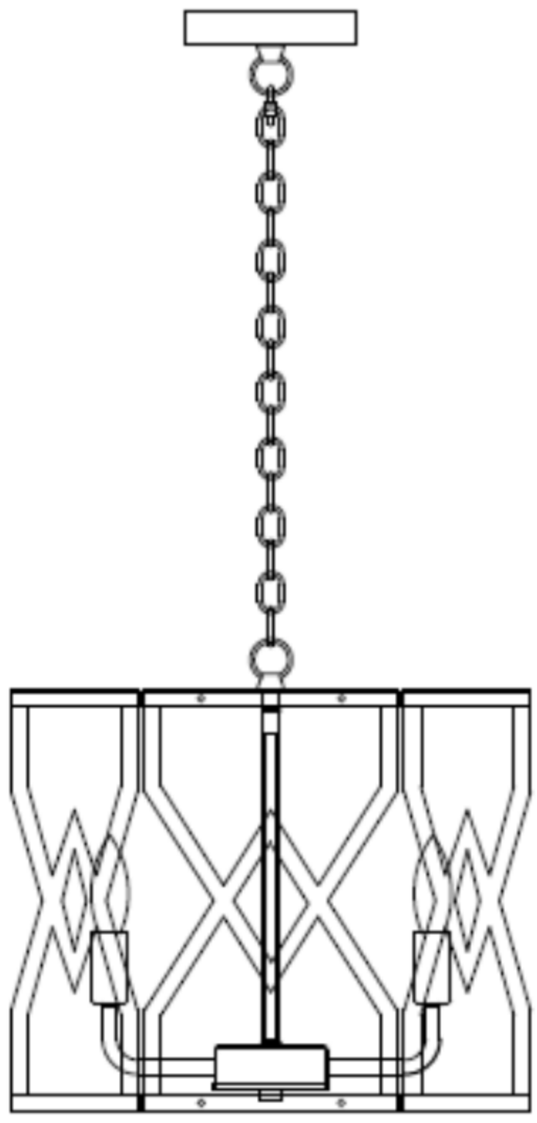

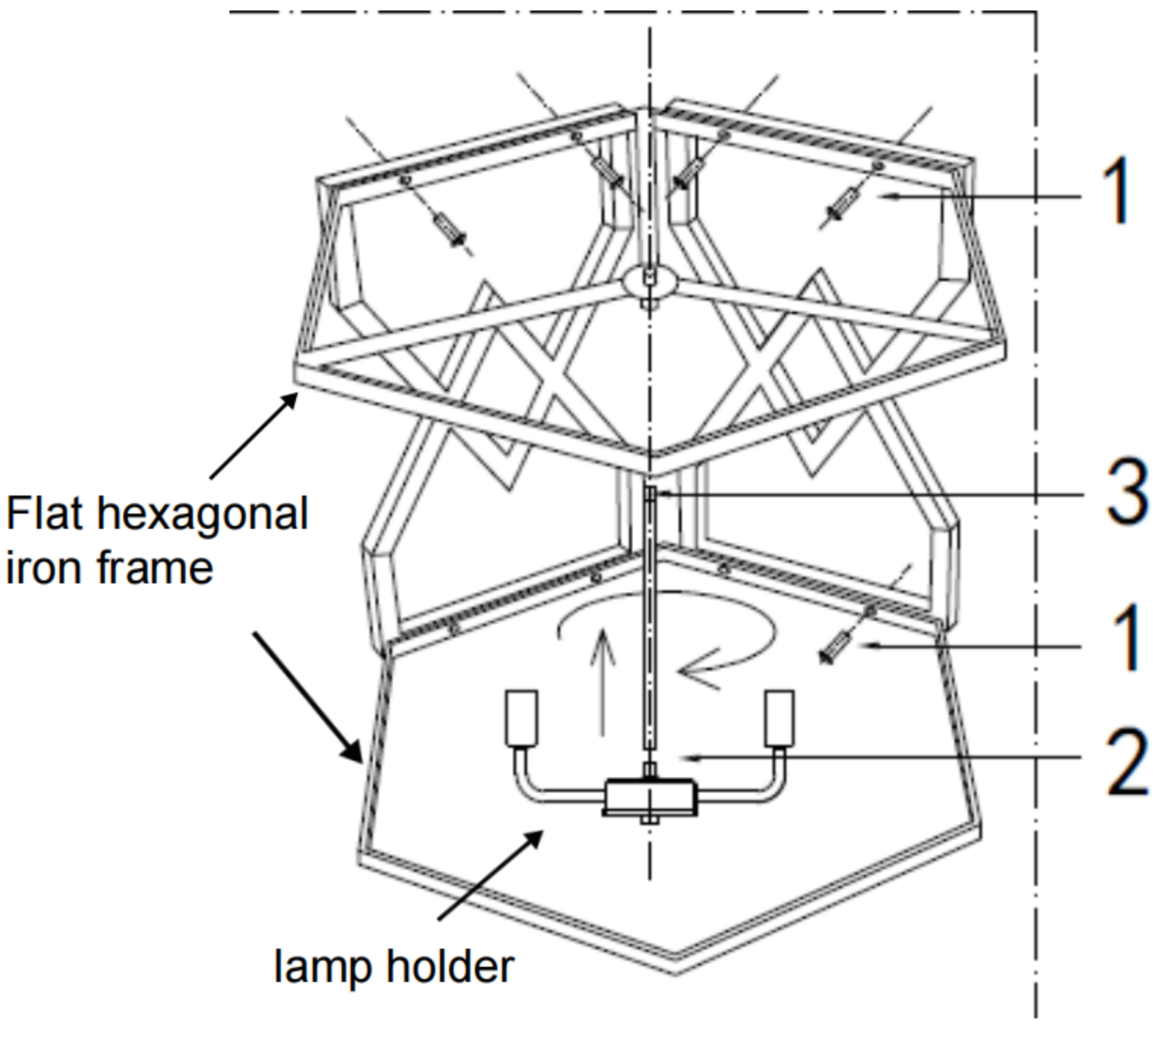

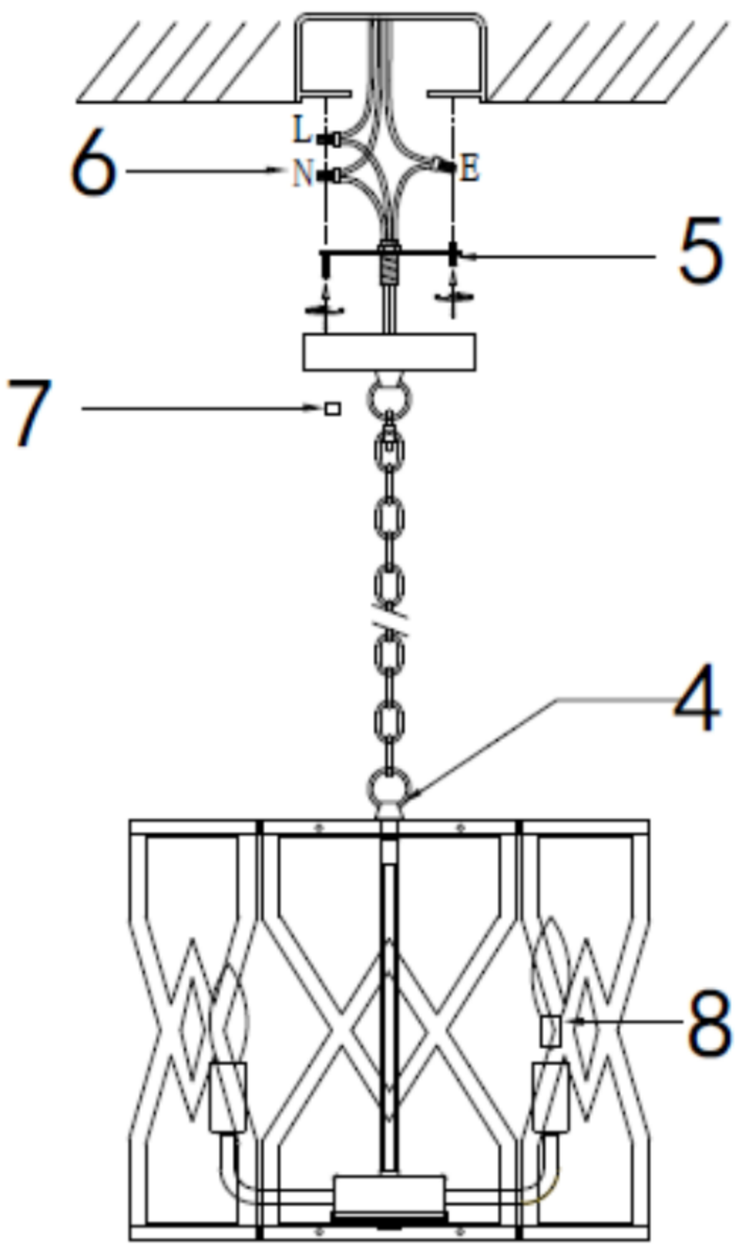

Installation steps:

1. Install the frame of the lamp body to the flat hexagonal iron frame.
2. Pass the wires of the lamp holder through the hanging rod.
3. Tighten the hanging rod and the lamp holder to the middle of the flat hexagonal iron frame.
4. Install the hanging chain to the lamp body and wrap the wires around the hanging chain.
5. Lock the lights Cross Bars to the junction box as shown in the figure.
6. Connect the live wire (L), neutral wire (N) and ground wire (E) to the junction box.
7. Install the ceiling light canopy and lock it.
8. Install the E12 light source.