

Step Assembly

Tools needed: A screw gun or drill with a #2 Philips screwdriver bit.


Items supplied:

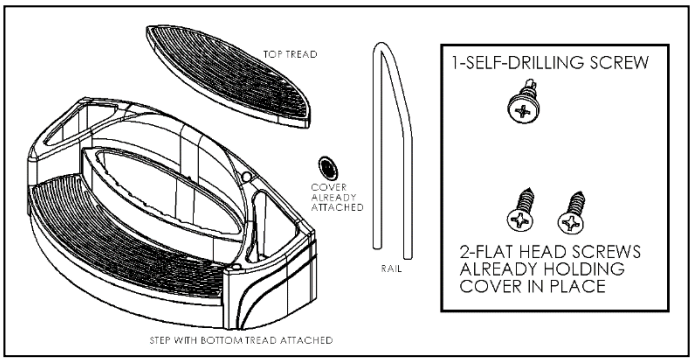

Assembly steps:

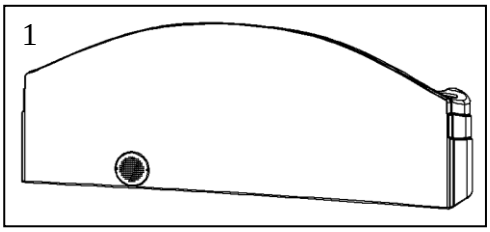

1. Using a Philips screwdriver, remove the two flat head screws and cover from back of step.
2. Insert the rail into the two round holes. The long leg toward the back.

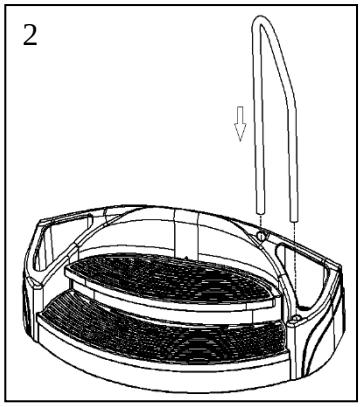

3. Feed the long leg through the top hole and guide into the bottom hole. Push downward through the plastic sleeve until the long leg hits the floor. Then, using the drill and Philips bit, drill the self-drilling screw through the plastic sleeve and through the rail until secure.
4. Reinstall the cover using the two flat head screws and screwdriver.
5. Place the top tread into place, ensuring the peg at the back of the tread, inserts into the corresponding hole. See page 7 for locating your step against the spa.

