


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING:TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.


- NOTES:
- 1. Before installing,consult local electrical codes for wiring and grounding requirements.
 - 2. Read and save these instructions.
 - 3. Always switch off the electricity supply and allow to cool for 10 minutes before changing the light bulbs.

PENDANT LAMP

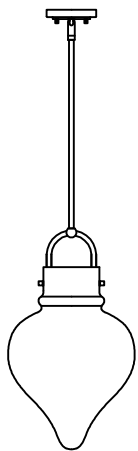

PD34303BK.PD34304WG

TOOLS REQUIRED

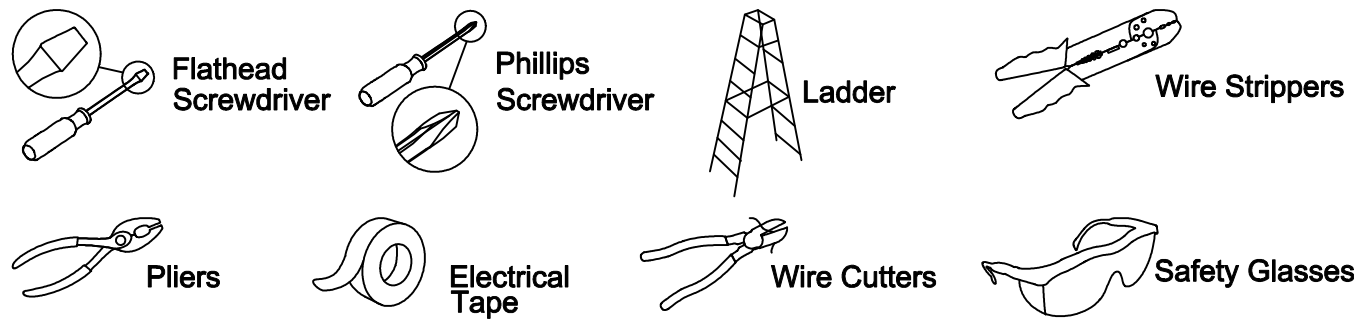

PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.When the lamp is not installed finish,please don't throw away the package,so as not to leave the parts in the package.

PART LIST AND HARDWARE LIST

PIECE	DESCRIPTION	PIECE	DESCRIPTION
A	Cross bar	G	6"tube
B	Green ground screw	H	Fixture body
C	Outlet box screw	I	Rubber washer
D	Canopy	J	Cylinder nut
E	Knurled nut	K	Glass shade
F	12"tube	L	Wire nut

INSTALLATION

- 1. Attach the 6"tube(G) through the wire to fixture body(H), and lock the 12"tube (F) and 6"tube (G) in turn.
- 2.Attach the swivel(M) through Wire to 12"tube(F).
- 3.Attach the cross bar (A) to the junction box with outlet box screw (C).
- 4.Attach the supply circuit ground wire (green or bare copper wire) to the the fixture ground wire,black to (black) and white to (white).
- 5.Attach the canopy (D) to the cross bar (A), secure with Knurled nut (E).
- 6. Install the 60W MAX A19 Bulb (not included) into socket.
- 7. Cylinder nut(J) Pass through rubber washer(I) and fix Glass shade(K) to Fixture body(H).

