

Steel/Aluminum Bench

ASSEMBLY INSTRUCTION

FRIENDLY REMINDERS

- * During assembly, place the empty carton beneath the casting parts to protect the finish from damage.
- * Do not over-tighten!
- * Handle with care! Please keep children away from assembly area!

HOUSEHOLD TOOLS REQUIRED: Adjustable wrench and Philips screwdriver


PARTS LIST:

Parts List		Hardware Kit	
Description	Quantity	Description	Quantity
Left leg	1	BB. Flat head screw ,steel	4
Right leg	1	AA. Hex bolts, stainless steel	4
Back	1	CC. Stainless steel washer	4
Pre-assembled seat	1	DD. Safety cap nut 6mm	4

STEP 1

Hold two legs straight up on a flat surface. Connect the back to both legs with 4 Hex bolts (AA), 4 washers (CC).

*** Do not completely tighten.**

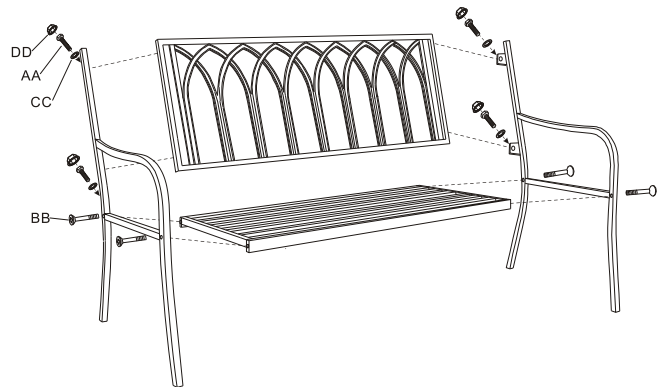

STEP 2

Place the pre-assembled seat on both legs. Match seat holes and leg holes before inserting screws. Connect the pre-assembled seat to both legs with 4 Flat head screws (BB) onto the corners of seat from left and right sides.

*** Do not completely tighten.**

STEP 3

Make Sure the bench stands level and straight. (90 degree to floor)

Then securely tighten all bolts .Put safety cap nuts (DD) on Hex bolts (AA).