




1. Place the shelf on the wall horizontally, and use a pencil to draw the position of the two shelf bases on the wall.




2. Connect the short rod to the front two holes of shelf and tighten it with a wrench, and install the long rod on the back of shelf in the same way.



3. Use a wrench to remove the negative inside the base



4. Install and fix the negative on the marked base positions penciled in figure 1

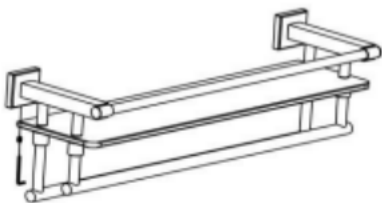

5. Connect the shelf with short and long rods connected and tightened to the base and tighten it with a wrench