


# Assembly Instructions for Model HL221963713

## Package Contents

Part	Description	Quantity
A	Hanging Rod	1 pc.or 2 pcs.
B	Arm Support Plate	1 pc.
C	Mounting Bracket	1 pc.
D	Fixture Arm	8 pcs.
E	Ceiling Canopy	1 pc.
F	Glass Shade	8 pcs.

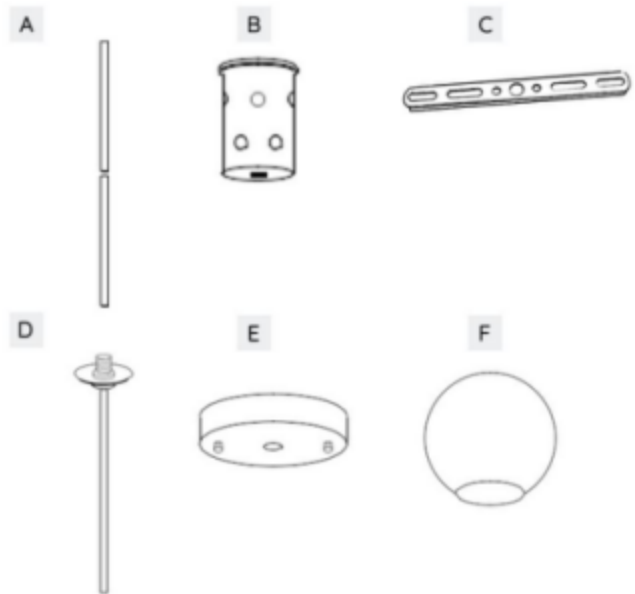

### STEP 1

Mark the drilling position on ceiling with the help of the Mounting Bracket(C).  
Drill holes on the marks and stick the hook-shaped expansion anchors into the holes.  
Fix the Mounting Bracket(C) to the hook-shaped expansion anchors with self-tapping screws.

### STEP 2

Remove the chassis of Arm Support Plate(B).  
Thread the wire of Fixture Arm(D) to the hole of Arm Support Plate(B)  
Screw the Fixture Arm(D)to the Arm Support Plate(B)  
Repeat the above step to fix the other Fixture Arms(D)

### STEP 3

Connect wire color Black/Red from the Arm Support Plate(B) as one strand of wire.  
Connect wire color White/Blue of Arm Support Plate(B) as the other strand.  
Restore the chassis of the Arm Support Plate.

### STEP 4

Screw and connect the Hanging Rod(A)  
Thread the wire of the Arm Support Plate(B) through the Hanging Rod(A)  
Fix the Hanging Rod(A) to the Arm Support Plate(B)

**STEP 5**

Thread the wire of the Hanging Rod(A) to the Ceiling Canopy(E)  
Fix the Hanging Rod(A) to the Ceiling Canopy(E)

**STEP 6**

Hold the fixture close to ceiling.  
Connect live line to wire color Black/Red from the Fixture.  
Connect neutral line to wire color White/Blue from the Fixture.

**STEP 7**

Attach the Ceiling Canopy(E) to the Mounting Bracket(C).

**STEP 8**

Fix the Glass Shade(F).

Your fixture is now assembled and ready to use.