

INSTALLATION STEPS

Preparation Tools (Not Included):

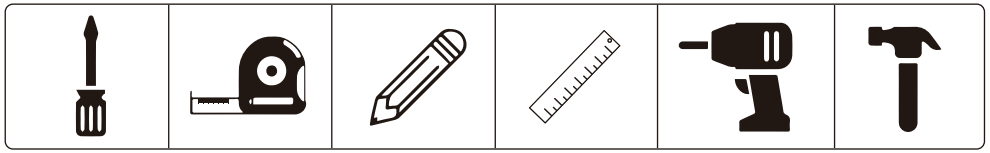

Screwdriver | Tape Measure | Marker pen | Level Ruler | Electric Drill | Hammer


INSTALLATION STEPS:

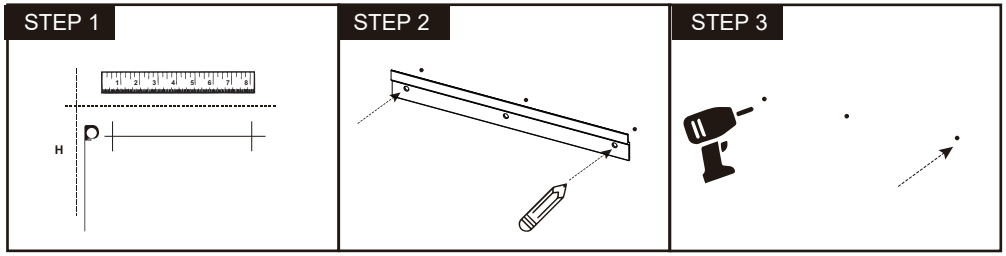

Use a level ruler and tape measure to locate the position that needs to be suspended.

Place the wall-hanging bar in the hanging position and mark the hole with a marker pen.

Drill the holes at the marks.

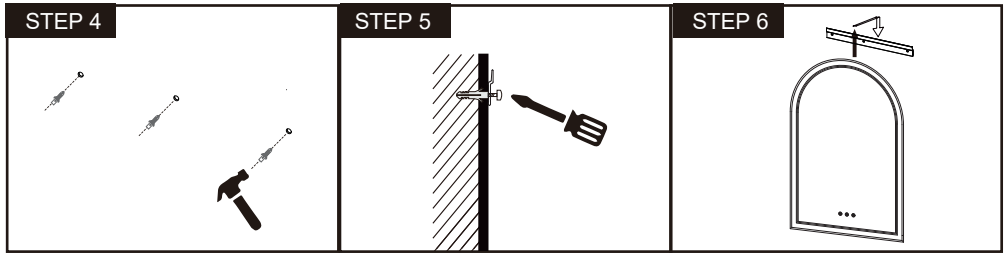


Use hammer to drive the expansion anchors into the hole on the wall.

Align the wall-hanging bar with the holes,and screwdrive the screws through the hole on the wall-hanging bar then into the expansion anchors.

Hang the mirror on the wall-hanging bar and adjust.

LED BATHROOM MIRROR

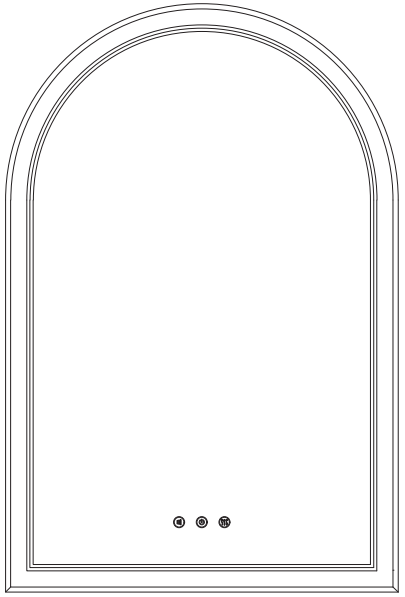

Trouble shooting:

Missing / Wrong / Broken parts and installation issues

↓


Send email with your question

↓


Respond within 24 hours

↓

Issue resolved

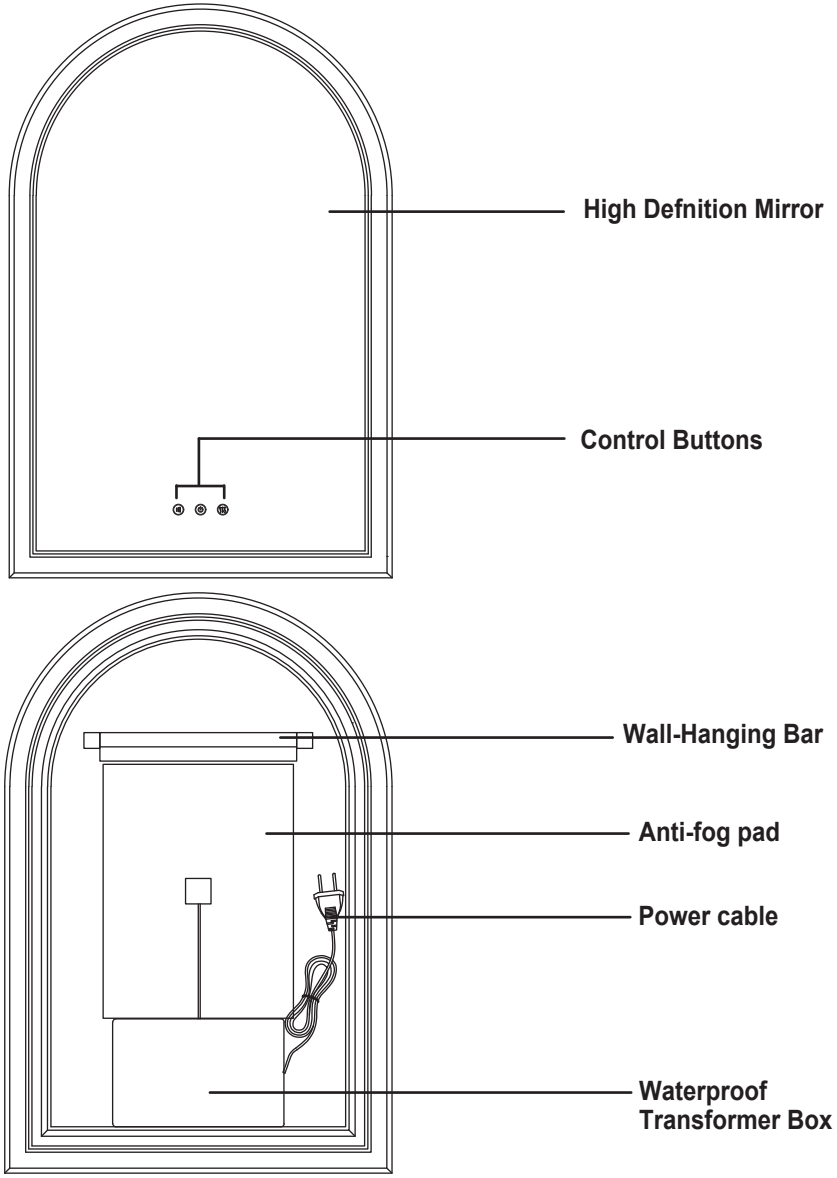

PACKING LIST

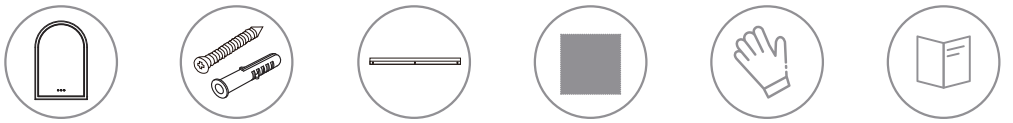

BUTTON CONTROLS




Short press the button to turn on the back LED light, short press again to change the back LED light color temperature: White/Natural/Warm.


The default brightness is 100%. Press this button to turn on/off the light and hold the button to adjust the front LED light brightness from 10% to 100%.
Note: This button has memory function that will resume the front light settings when the power is off and back on.

Short press the button to turn on the defogging function. The button backlight of the changes from blue light to white light.
It is expected that the defogging function will take effect within 5-10 minutes
(The effective time will vary depending on the size of the space and temperature differences.)
Short press again to turn off the defogging function, and the button backlight changes from white light to blue light.
In order to save energy and prevent overheating, the defogging function is set to automatically turn off after 1 hour.(Note: When the defogging function is turned on and the key backlight is turned off, the heating function is still working.)

Plug-in or Hardwired

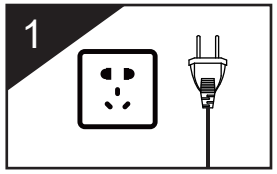

Standard Europe-2 prong plug can be used directly

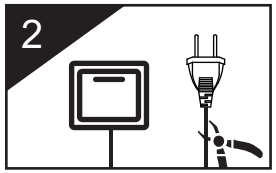

choose a wall switch as needed

