

# INSTRUCTION MANUAL

♥Thank you for choosing♥

## NOTICE:

IMPORTANT, KEEP FOR FUTURE REFERENCE PLEASE READ CAREFULLY.

IF YOU HAVE ANY CONCERNS ABOUT THE PRODUCT, PLEASE FEEL FREE TO CONTACT US BEFORE YOU LEAVE A REVIEW.


## CAUTION:

1. The installation requests a professional electrician to operate. Please make sure the installation environment ventilating and dry.
2. Wearing gloves during installation to prevent yourself from scratching by the fixtures or electric wire. Be sure the power has been turned off before operation.
3. Make sure the fixture is away from corrosive chemicals and air such as acid and alkali. Clean the fixture by wiping it with a dry rag.
4. Do not touch the bulb when the fixture is turned on or look directly at the lit bulb. Keep flammable materials away from the lit bulb.
5. To reduce the risk of fire, electrical shock, and personal injury, always turn off and unplug the fixture and allow it to cool before replacing the light bulb.


## STEP-BY-STEP INSTALLATION (Reference assembly drawing)

1. Shut off the power at the circuit breaker and remove the existing fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts in a clear area, Be careful not to lose any small parts necessary for installation.
3. Remove the mounting screw from the light fixture.
4. Adjust the steel wire rope to achieve the want height (refer to Fig 1)
5. Use expansion screws to fix the hanging bracket to the ceiling wall (Reference assembly drawing)
6. Connect the wire (N) from the light fixture to the supply wire (N)  
Connect the wire (L) from the light fixture to the supply wire (L)
7. After wires are connected, tuck them carefully inside the junction box.
8. Mount the canopy onto the bracket and secure it with four decorative nuts.
9. Connect the assembly lamp head to the lower end of the lamp body lamp and tighten the nut knob to connect the wire (N) to the assembly lamp head wire (N) and connect the wire (L) from the lamp body lamp to the assembly lamp head wire (L) (Reference assembly drawing)
10. To finish the structure of the lamp body, it need to fix the metal tube on the metal ring with screws. (refer to Fig 3)
11. Add the **E14** bulbs, and turn on the power, check whether the light fixture works normally or not.
12. Ensure the light fixture work normally, Hang the crystal on the lamp body. (refer to Fig 2)

Step1. Measure the distance between the expansion screw holes of the cross hanging plate with a ruler, and mark the positioning points on the cement ceiling




Step2. Use a drilling rig to drill holes in the ceiling that are suitable for expansion screws



Step3. Insert the expansion screw into the ceiling hole

Step4. Fix the cross hanging plate onto the expansion screw with a nut

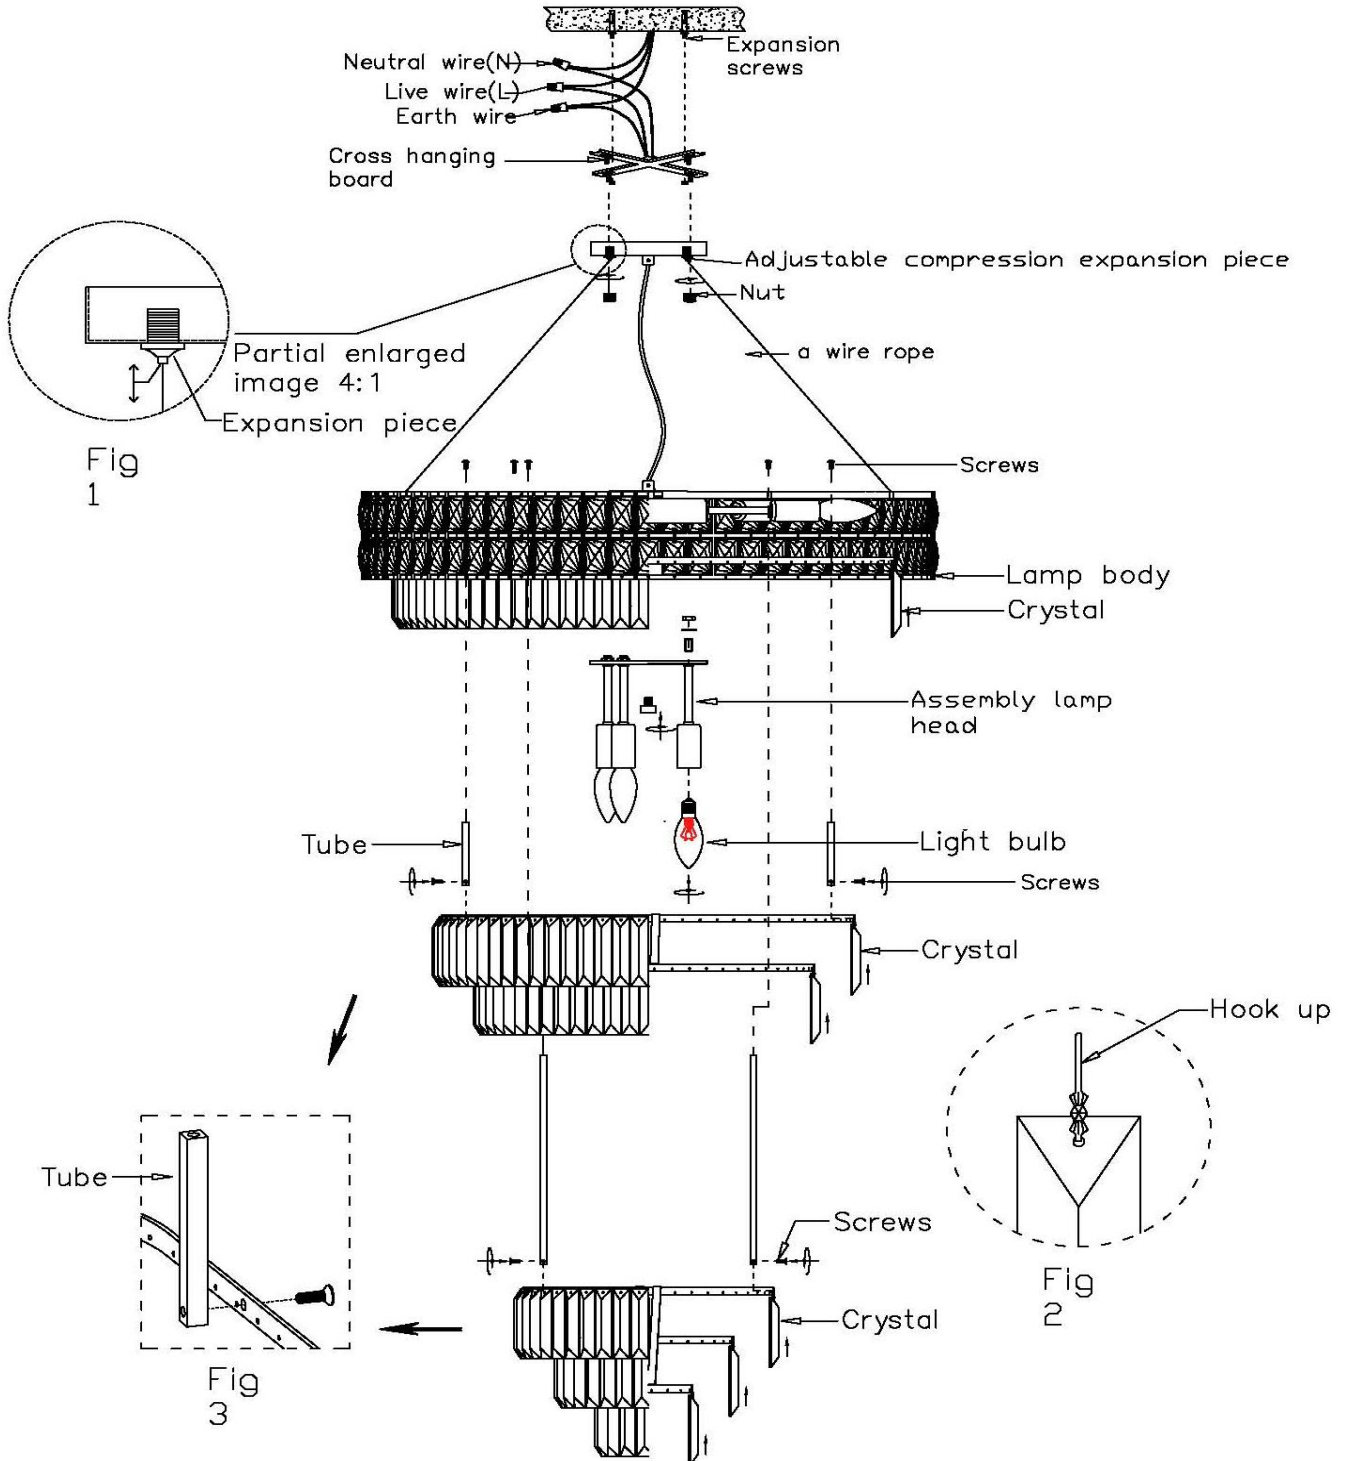

**Package List:**

Lamp body	1	PCS
Φ 560mm Metal ring	1	PCS
Φ 320mm Metal ring	1	PCS
170mm Metal tube	3	PCS
270mm Metal tube	3	PCS
Crystal	9	BAGS
Spare crystal	2	BAG
expansion screws	1	BAG
Assembly lamp head	5	PCS
Decorative nuts	4	PCS
Mounting bracket	1	PCS
Canopy	1	PCS
Accessories Bag	1	BAG
Installation Instructions	1	PCS

※**The package include extra crystal pieces.** Spare Accessory:

This product needs 250 crystals, and we have equipped 270 crystals in the product packaging. Therefore, when you find that the number of product crystal is less than 250, please contact us in time, we will be timely with you after-sale.

This product compatible with **E14** bulbs (Not included in the package).

