


























Instruction Manual


Accessories list

Note: All the parts marked with * are tucked under or with other parts

A  <p>Left seat frame(1)</p>	B  <p>Right seat frame(1)</p>	C  <p>Right armrest(1)</p>	D  <p>Left armrest(1)</p>
E*  <p>Foot pedal side pane(4)</p>	F*  <p>Foot pedal base plate(1)</p>	G*  <p>Foot pedal panel(1)</p>	H*  <p>Right backrest(1)</p>
I*  <p>Left backrest(1)</p>	J*  <p>Seat cushion(4)</p>	K*  <p>Back cushion(3)</p>	L*  <p>Right armrest soft bag(1)</p>
M*  <p>Left armrest soft bag(1)</p>	①*  <p>Left bracket(2)</p>	②*  <p>Right bracket(2)</p>	③*  <p>16mm Colour gasket(16)</p>
④*  <p>6*16 Colour screw(32)</p>	⑤*  <p>M4*100*30 Wrench(1)</p>	⑥*  <p>Foot pedal hardware(4)</p>	⑦*  <p>Sofa foot(10)</p>
⑧*  <p>40x100x2 Black metal plate(1)</p>	⑨*  <p>13mm Black gasket(2)</p>	⑩*  <p>6x25 Black screw(2)</p>	⑪*  <p>M4*65*23 Wrench(1)</p> <div data-bbox="1273 1948 1359 2024">  </div> <p>Instruction Manual(1)</p>

STEP 1:


Get all the hidden parts out of A,B and C,D

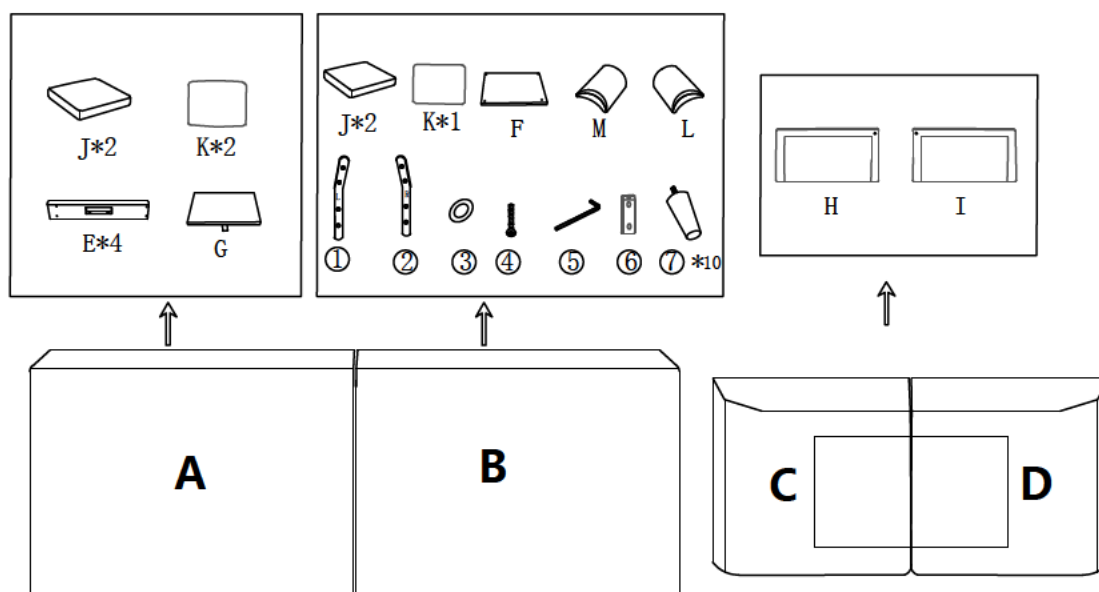

STEP 2:

Fix sofa foot to the sofa pedal base plate and the foot pedal hardware.





Note: Foot pedal hardware faces the smooth surface of the sofa pedal base

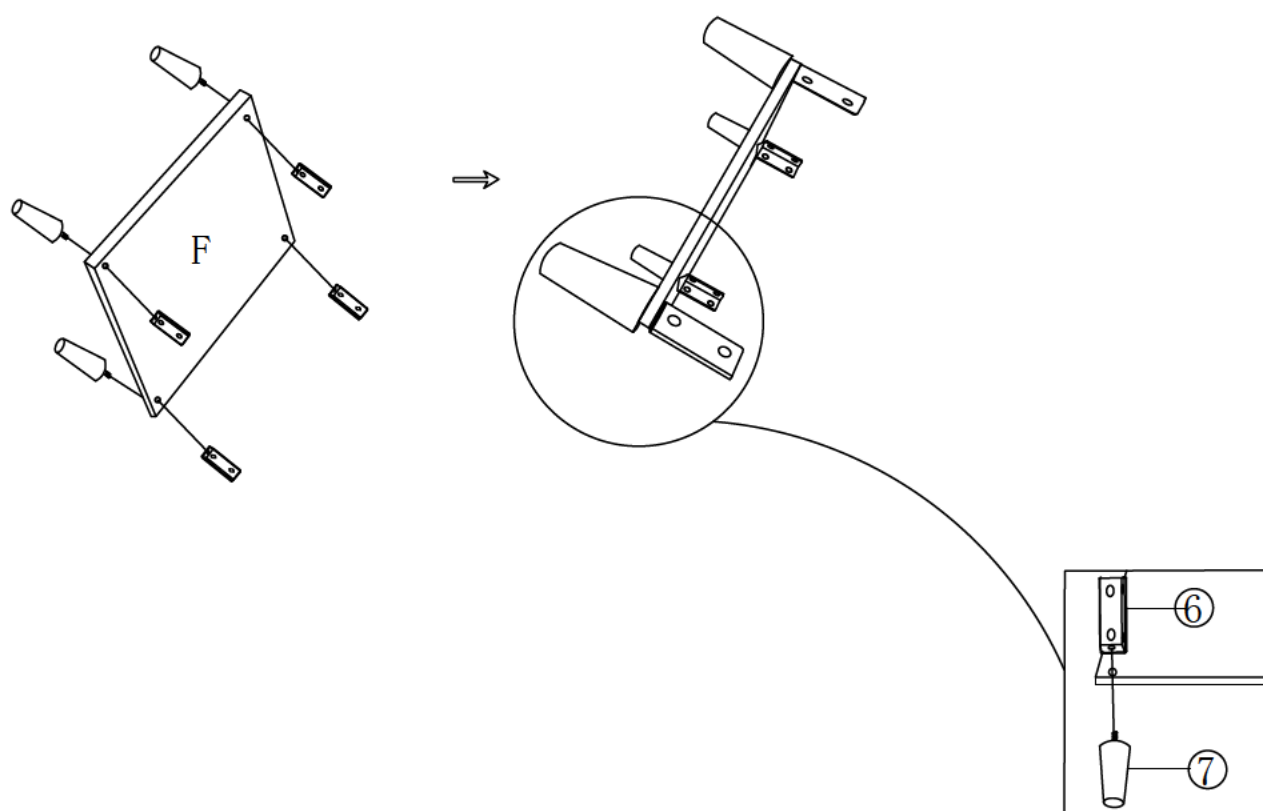

STEP 3:


Fix the side panel to the foot pedal hardware

Note: Do not tighten the screws to the foot pedal hardware till you put all of them in place

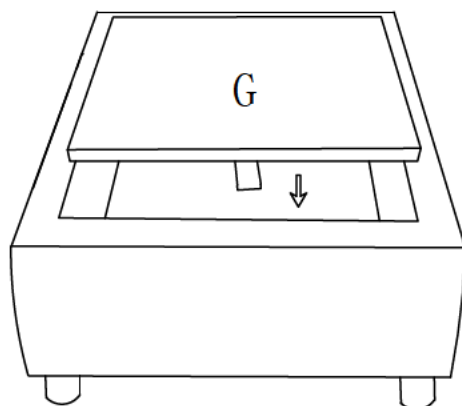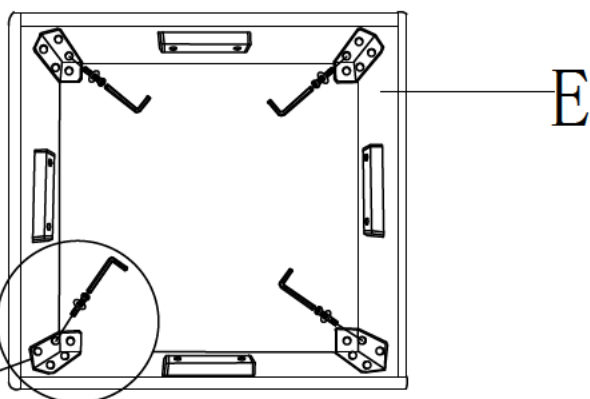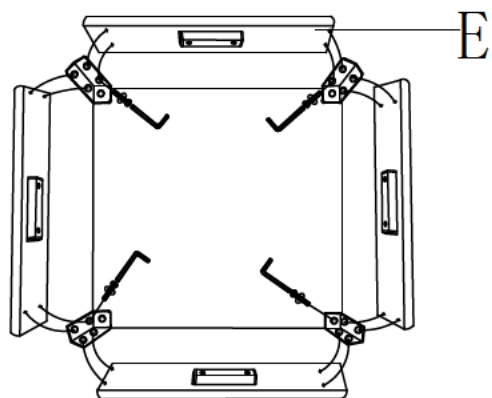

STEP 4:


Fix Left bracket ① and Right bracket ② to both sides of seat frame A

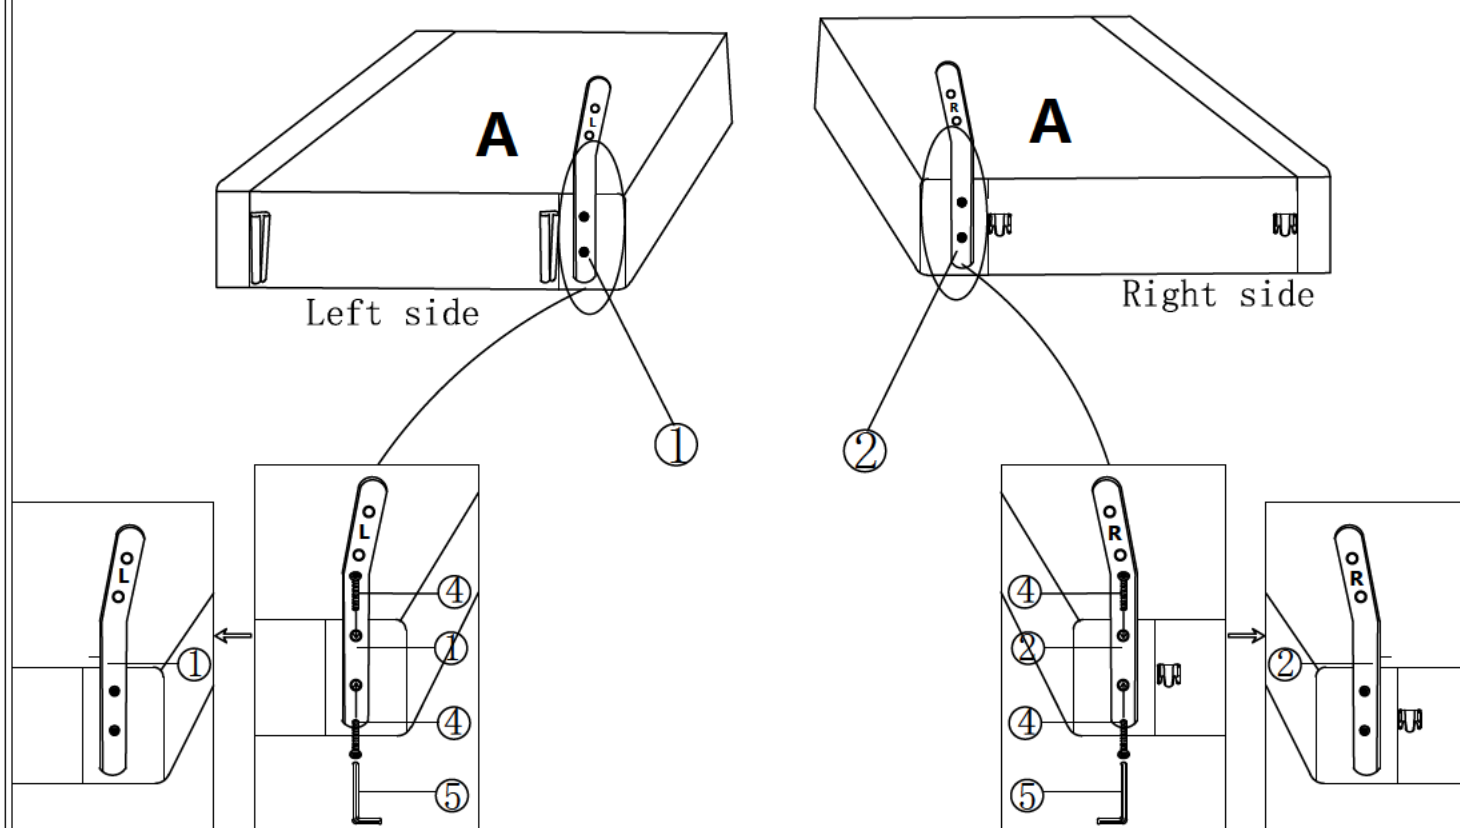

STEP 5:


Fix backrest I to seat frame A

Sitck the back cloth to the bottom of A

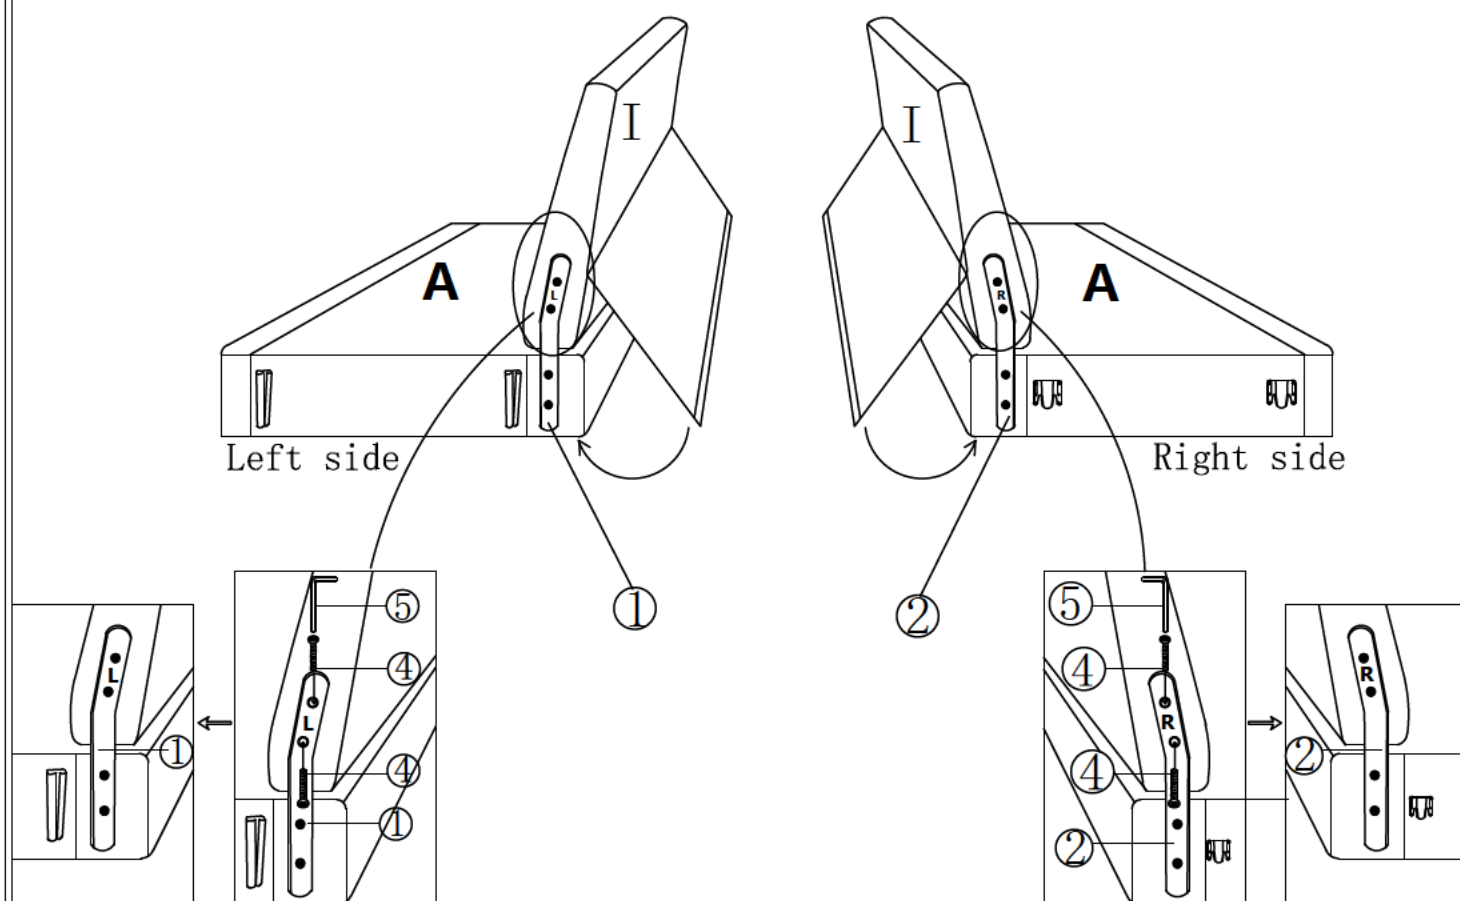

STEP 6:


Fix Left bracket ① and Right bracket ② to both sides of seat frame B

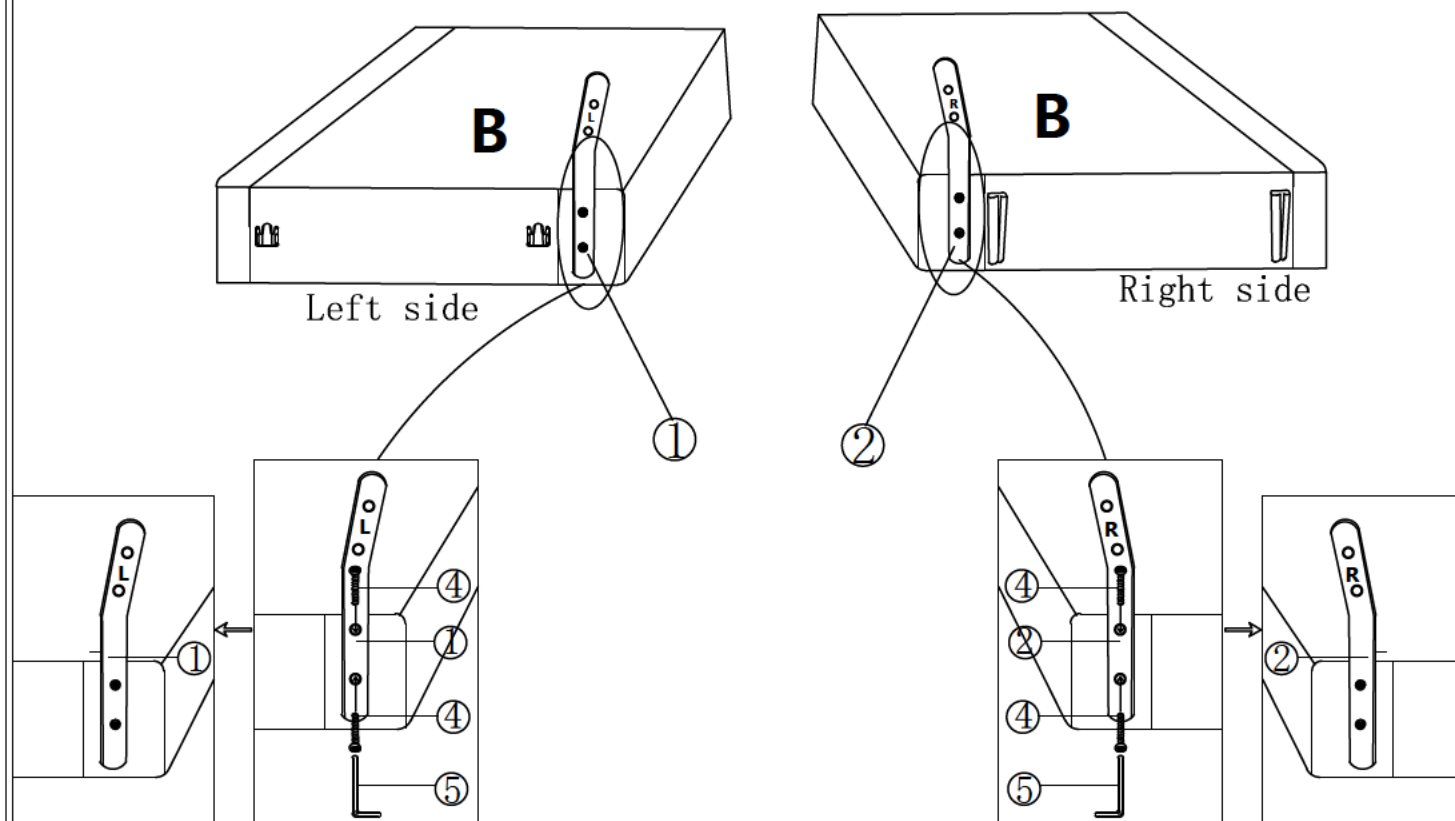

STEP 7:


Fix backrest I to seat frame B

Sitck the back cloth to the bottom of B

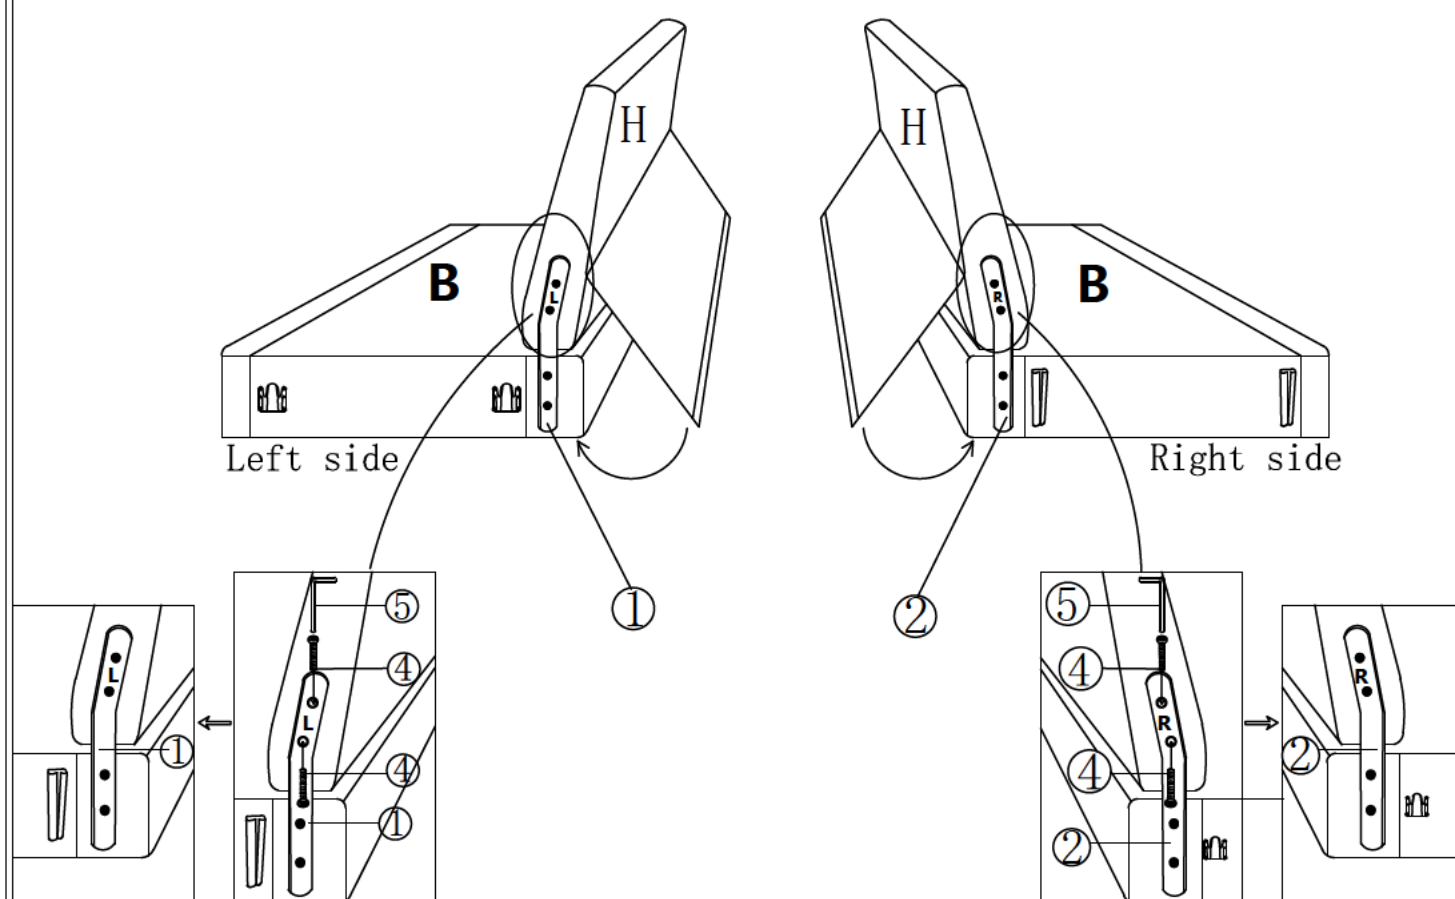


STEP 8:

Insert the left seat frame into the left armrest

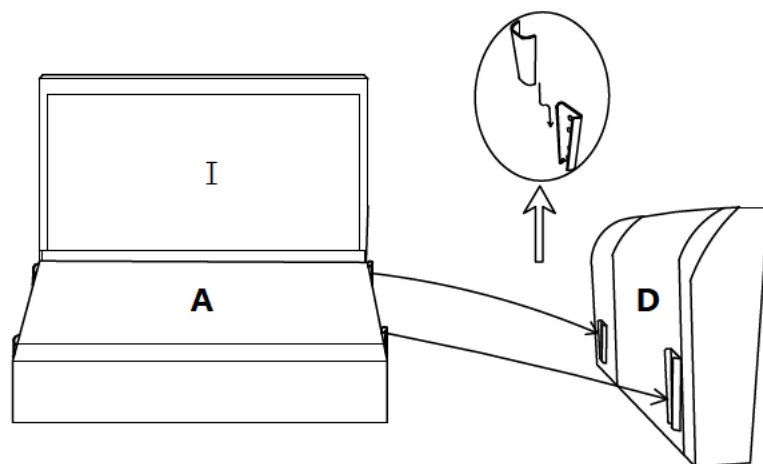


STEP 9:

Insert the right seat frame into the right armrest

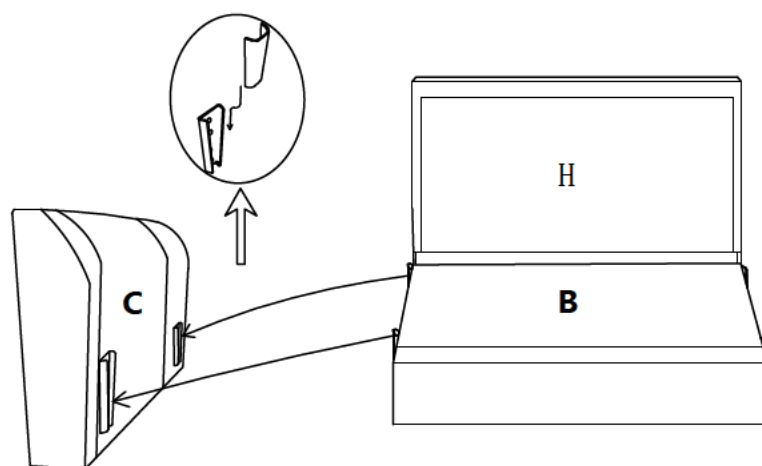


STEP 10:

Insert Left seat frame into the right seat frame

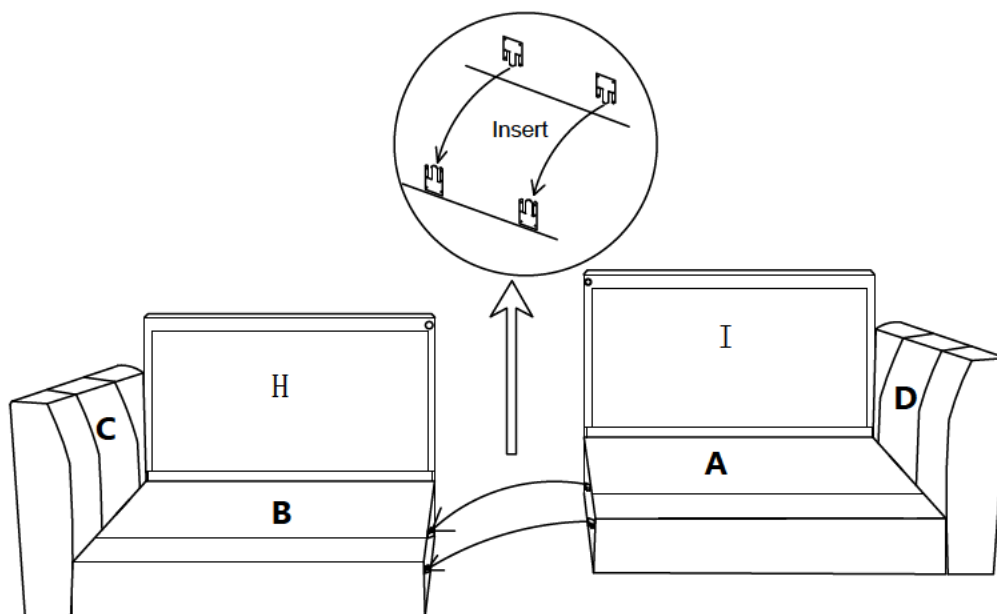

STEP 11:


Lock the backrest with the metal plate

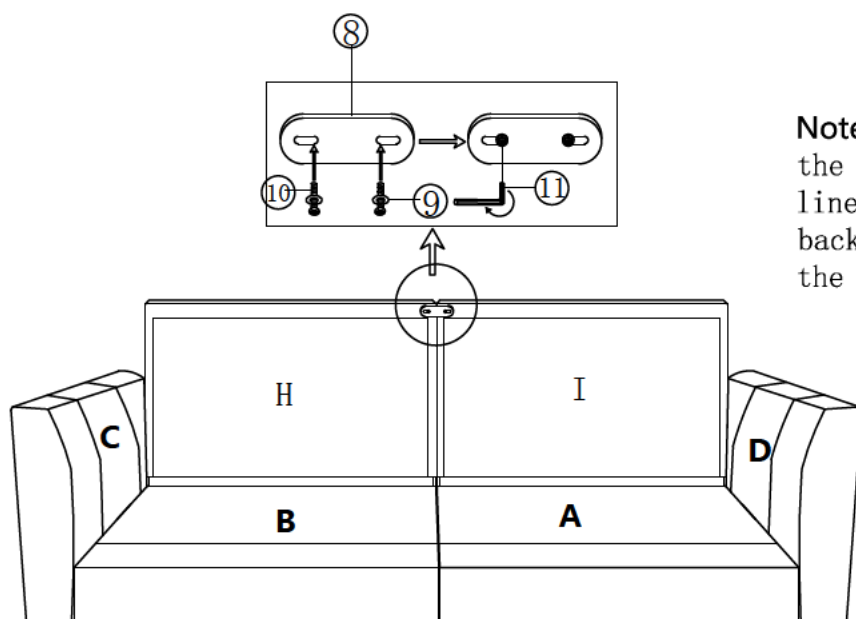

Note: This design is for reinforcing the back, sometimes the holes may not line up because they are at different back boards. It's normal so long as the metal plate can fit into place.


STEP 12:

Insert the sofa feet

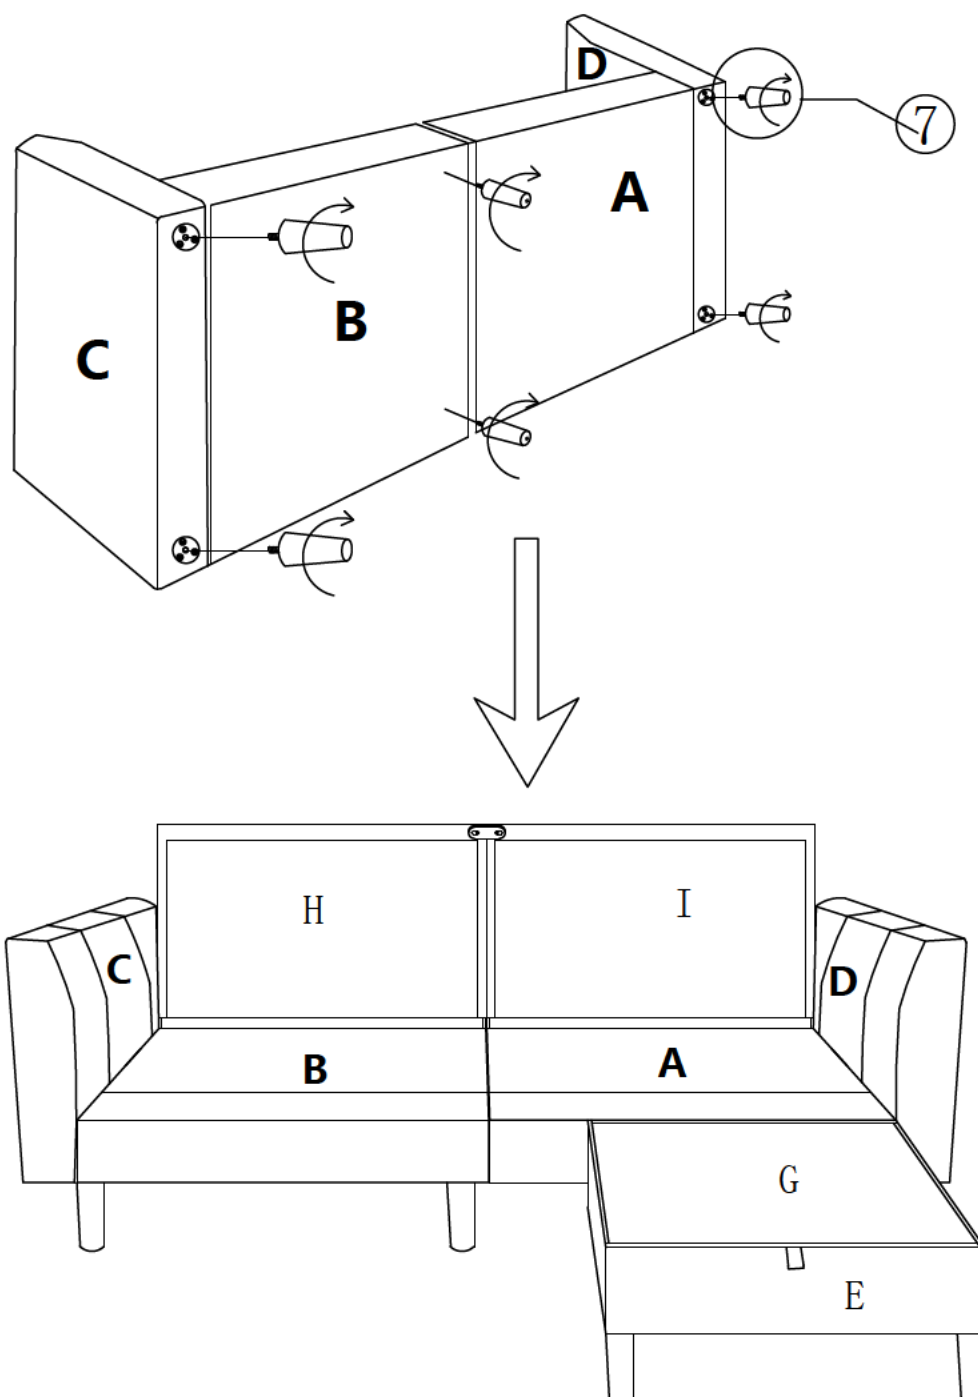


STEP 13:

Cut the compression bags
Tear open the Velcro on the back

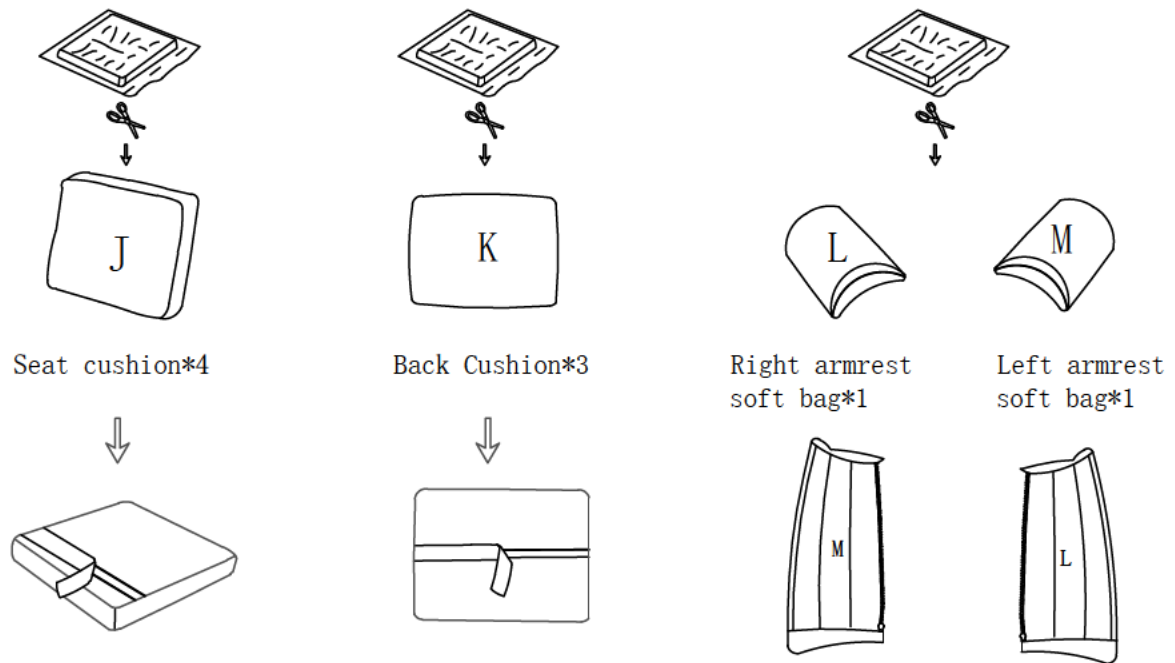


STEP 14:

Zip the armrest soft bag to the armrest

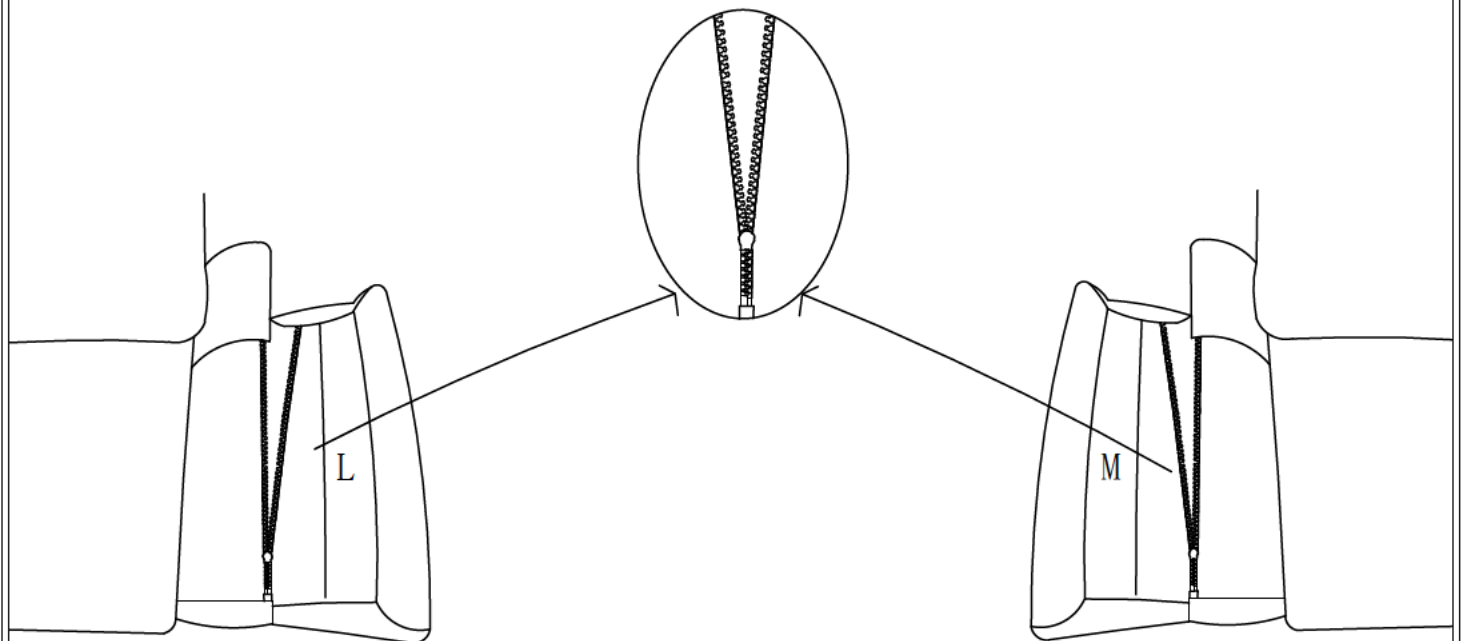

STEP 15:

Put the seat cushion and then the back cushions on the sofa

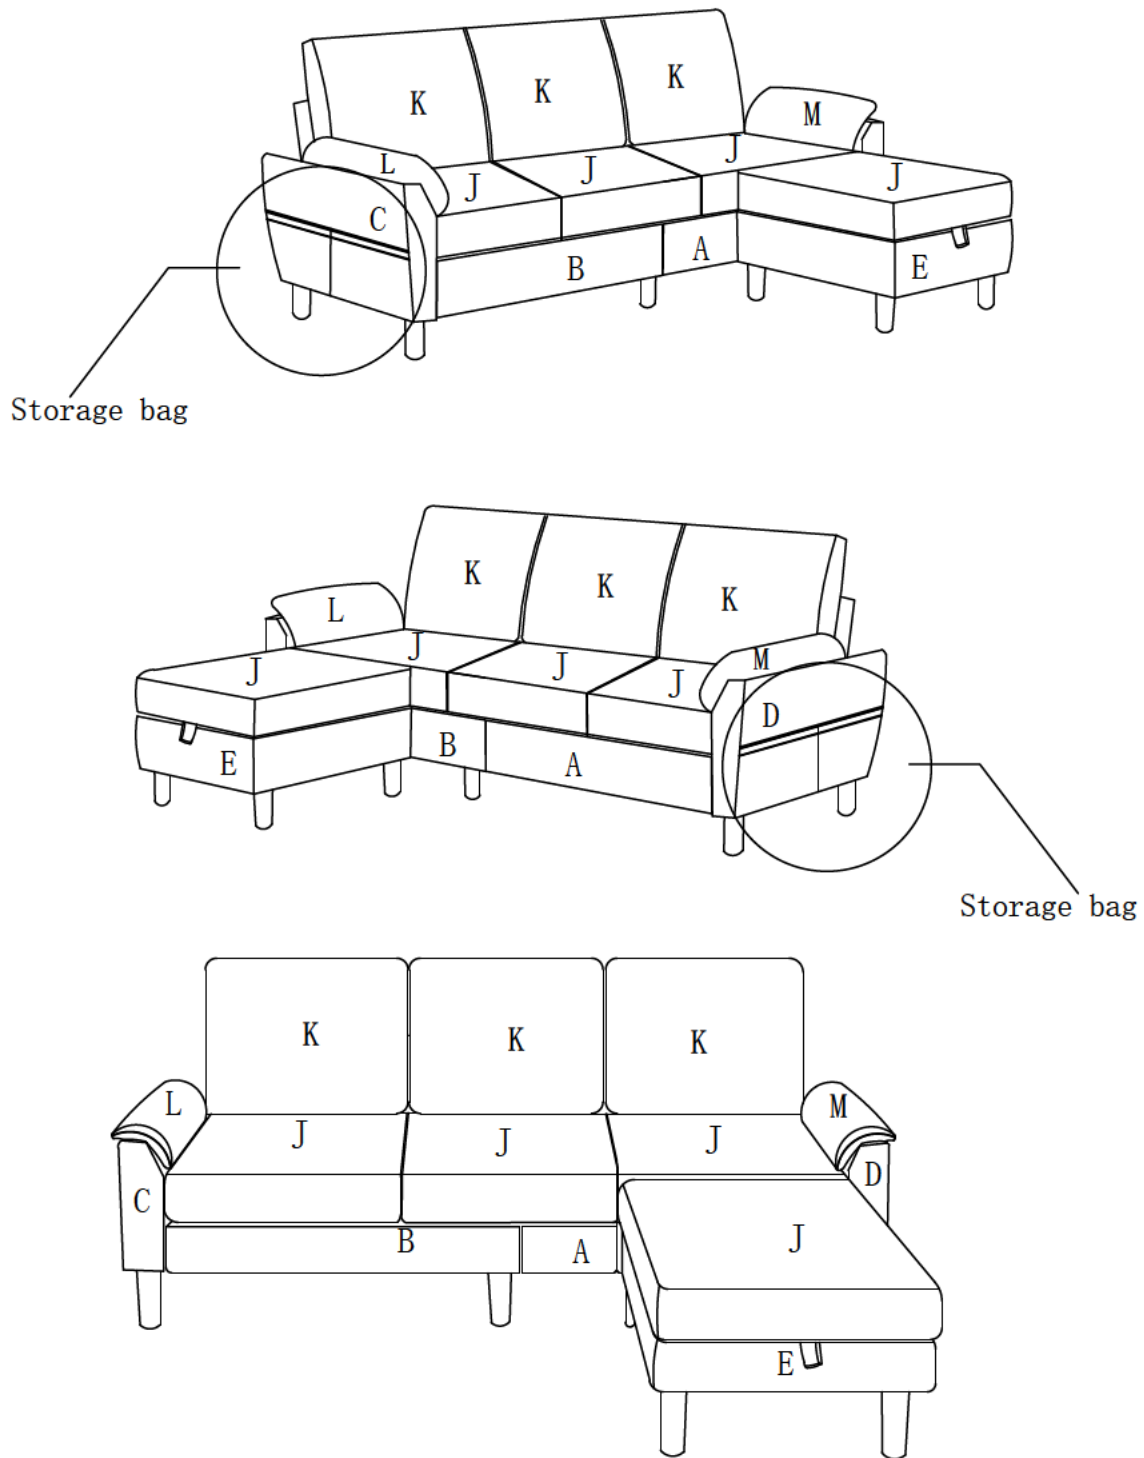

Note:The Velcro on the cushion faces the front side of the seat base

Tip:

1. Back cushions are compressed to prevent humidity and mold, sometimes it's inevitable to find some wrinkles when you get them out, you can iron them or use them to help them to get back into the original shape.
2. Hand wash is preferred for daily care.