


Submitted Model No.:

**Specific Features:** 



▲ Designate Proper Finish Suffix

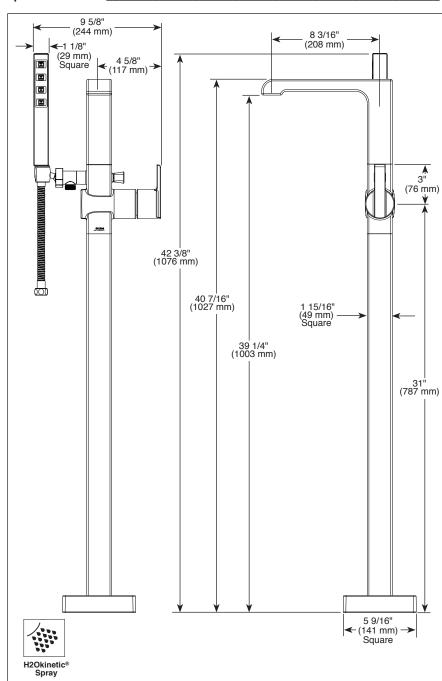

# FLOOR MOUNT **TUB FILLER**

■ Ara<sup>™</sup> Bath Collection

## **FEATURES:**

- H<sub>2</sub>Okinetic<sup>®</sup> Technology
  Multichoice<sup>®</sup> pressure balance cartridge

#### STANDARD SPECIFICATIONS:


- Handshower maximum flow rate 2.00 gpm @ 80 PSI, 7.6 L/Min @ 550 kPa
- Hot and cold indicators
- 60"-82" stretchable metal hose with metal fittings
- Auto resetting diverter
- Pivot handshower holder
- Rough-In R4700-FL or R4700-FLWS, required for installation
- Dual integral check valve on handshower

#### WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

### **COMPLIES WITH:**

 ASME A112.18.1 / CSA B125.1 Indicates compliance to ICC/ANSI A117.1 - Valve control only





55 E. 111th Street, Indianapolis, Indiana 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2015 Masco Corporation of Indiana