




8. Install the customer-supplied matched light sources.



9. Fix mounting bracket to ceiling with dedicated screws.

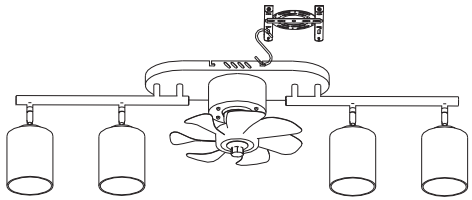


10. Hang fixture body with S-hook.

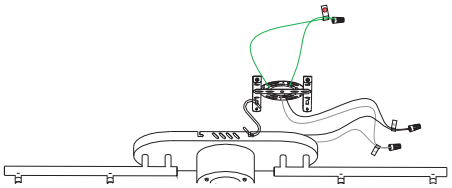


wiring diagram

11. Cut off power supply. Refer to the wiring diagram: connect controller black wire(L) to household live wire, white wire(N) to neutral wire ⏚, and fixture ground wire to building ground wire.

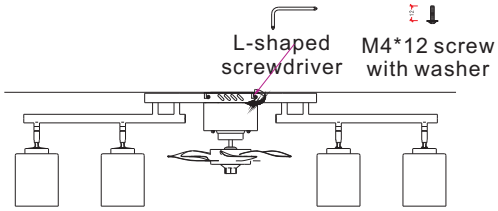

12. Align side holes of fixture and bracket, push fixture flush against ceiling, rotate fixture to lock screws into bracket slots, then tighten with M4*12 screws with washers.

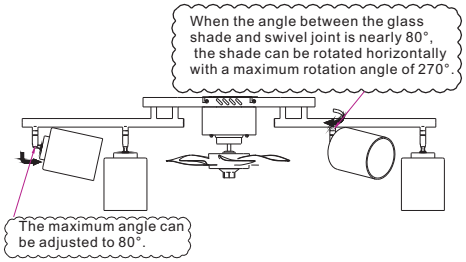



13. Adjust the lamp head direction according to personal lighting needs. Special

(**Note:** Always keep the glass shade at an angle of nearly 80° with the swivel joint before rotation. Installation finished.)

INSTALLATION INSTRUCTIONS

NO.2009

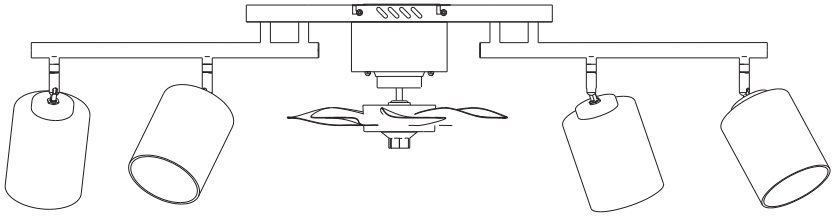

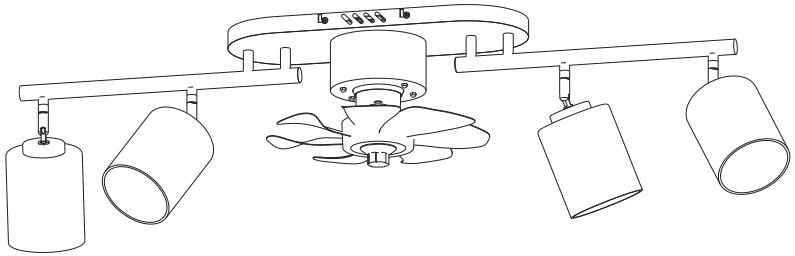


Please Scan the QR code to watch the installation video**.** If you have any questions**,** please feel free to contact us through the order page**.**

Please Scan the QR code to watch the installation video. If you have any questions, please feel free to contact us through the order page.


Warning!

1. Installation should be performed by a professional.
2. To prevent electric shock, please turn off the power before installing, repairing, or cleaning the light fixture.
3. This light fixture operates within a 110V to 265V range only.
4. Do not install the light fixture in damp conditions.
5. Keep the light fixture away from acidic and corrosive materials.


Package Includes

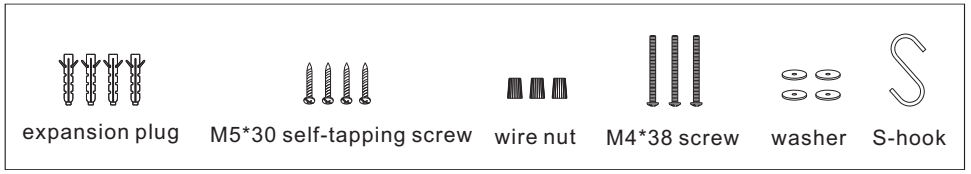


hardware kit

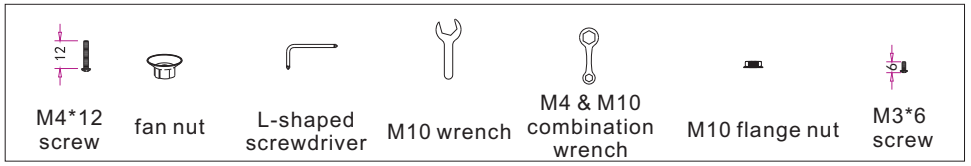


hardware kit

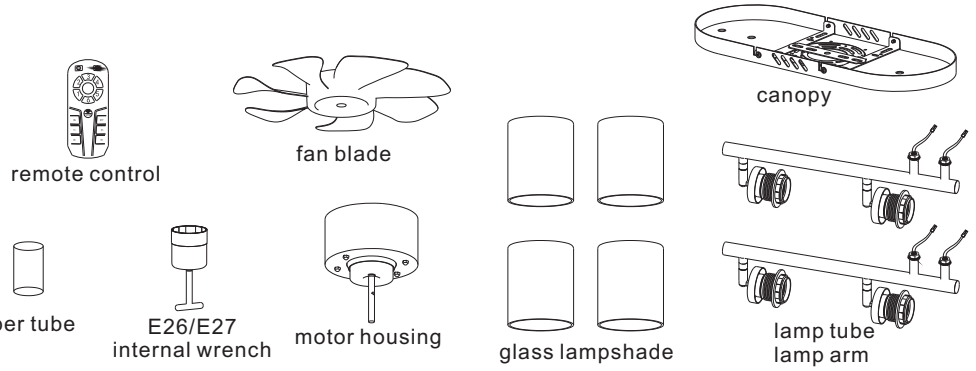


Installation Steps




1. Install fan blades and tighten blade caps counterclockwise.




2. Place a paper tube at the bottom of the fan blades for cushioning.




3. Separate the canopy and mounting bracket.

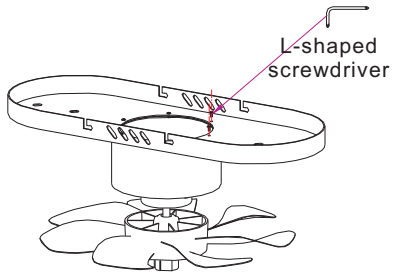


4. Align the canopy with motor housing holes, fasten with M3*6 screws and L-shaped screwdriver.

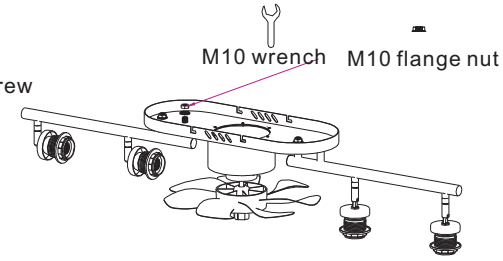

5. Connect lamp arms to canopy, lock with M10 flange nuts and M10 wrench.

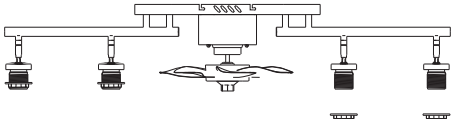

6. Unscrew all lamp rings as shown in illustration.

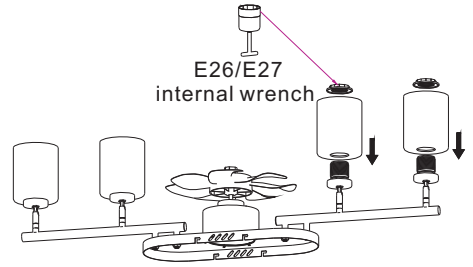

7. Flip the fixture over; use E26/E27 internal wrench to tighten the lamp rings onto the corresponding lamp holders as shown.