

⑨bolt screw

⑥hook hanging tube


①split frame

⑦hanging tube 1PCS

②canopy 1PCS

③cap nut 2PCS

④chain 1PCS



⑤hanging part 1PCS


⑧light fixture 1PCS

X1PCS X3PCS X3PCS


X3PCS X3PCS X2PCS

Note: male A should connect with femaleA, male B should connect with femaleB(C with C, D with D).


Don't tighten the screws⑨ until all screws in the holes, rotate to fixed the screw⑨ at last.

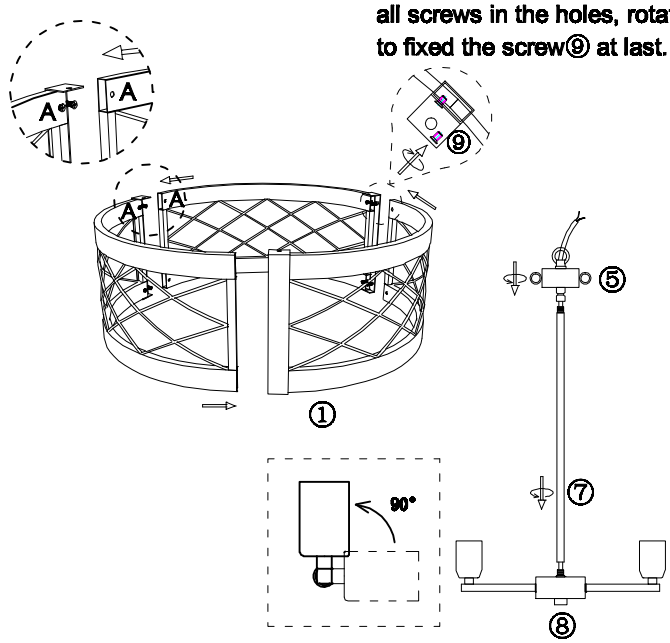

1.Loosen to remove out the screw ⑨, assemble the split frame ① to a complete circle frame with screw ⑨.
2.Upward the bulb holder 90 degree, let the wire go through the tube ⑦ and hanging part ⑤, rotate to fasten both to the fixture.

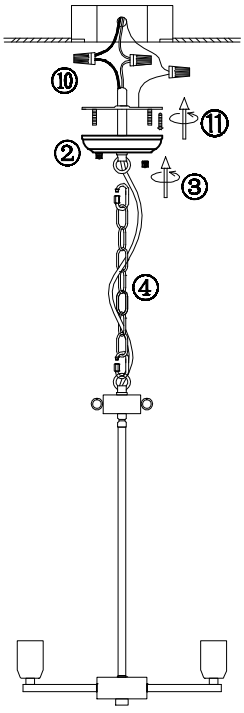

3.Hang the fixture to the canopy ② with chain ④, let the wire go through the chain ④ and canopy ②.
4.Install the bracket to the ceiling junction box with screw ⑪.
5.Connect the wire to your home line with connector ⑩.
6.Install the light fixture to the bracket with cap nut ③.

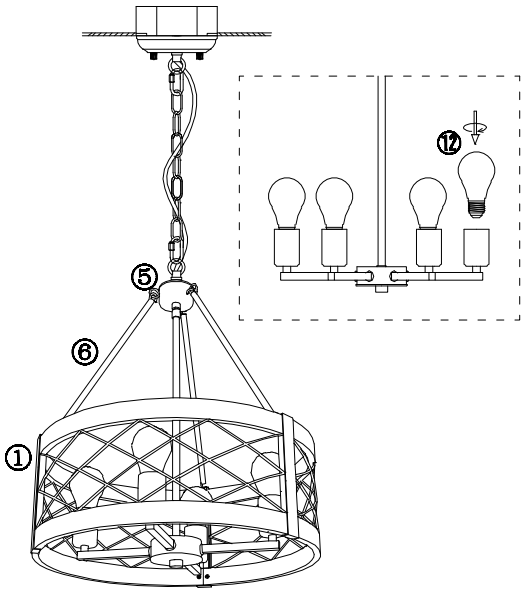

7.Hang the metal frame to the part ⑤ with tube ⑥.
8.Install the bulb ⑫.

Please read carefully before installation!!!
Note: Please make sure that the electricity is powered off during installation!Only a professional electrician should install this kind of product!