# ASSEMBLY AND INSTALLATION INSTRUCTIONS

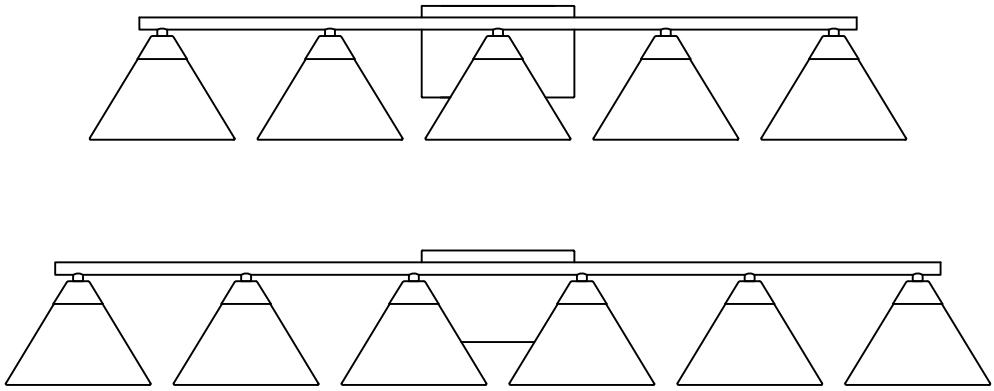
Item No: BD085-5-BG/BD085-6-BG

WARNING: TO AVOID THE RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES:


1. Before installing,consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.
3. Always switch off the power supply and allow the bulb(s) to cool for at least 10 minutes before replacement.

## BD085 (5/6-LIGHT) VANITY LIGHT





## TOOLS REQUIRED



Flathead Screwdriver



Phillips Screwdriver


Ladder


Wire Strippers


Pliers


Electrical Tape


Wire Cutters


Safety Glasses

## PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.Do not discard the packaging until installation is complete to ensure that no parts or hardware are accidentally discarded.

# PART LIST AND HARDWARE LIST

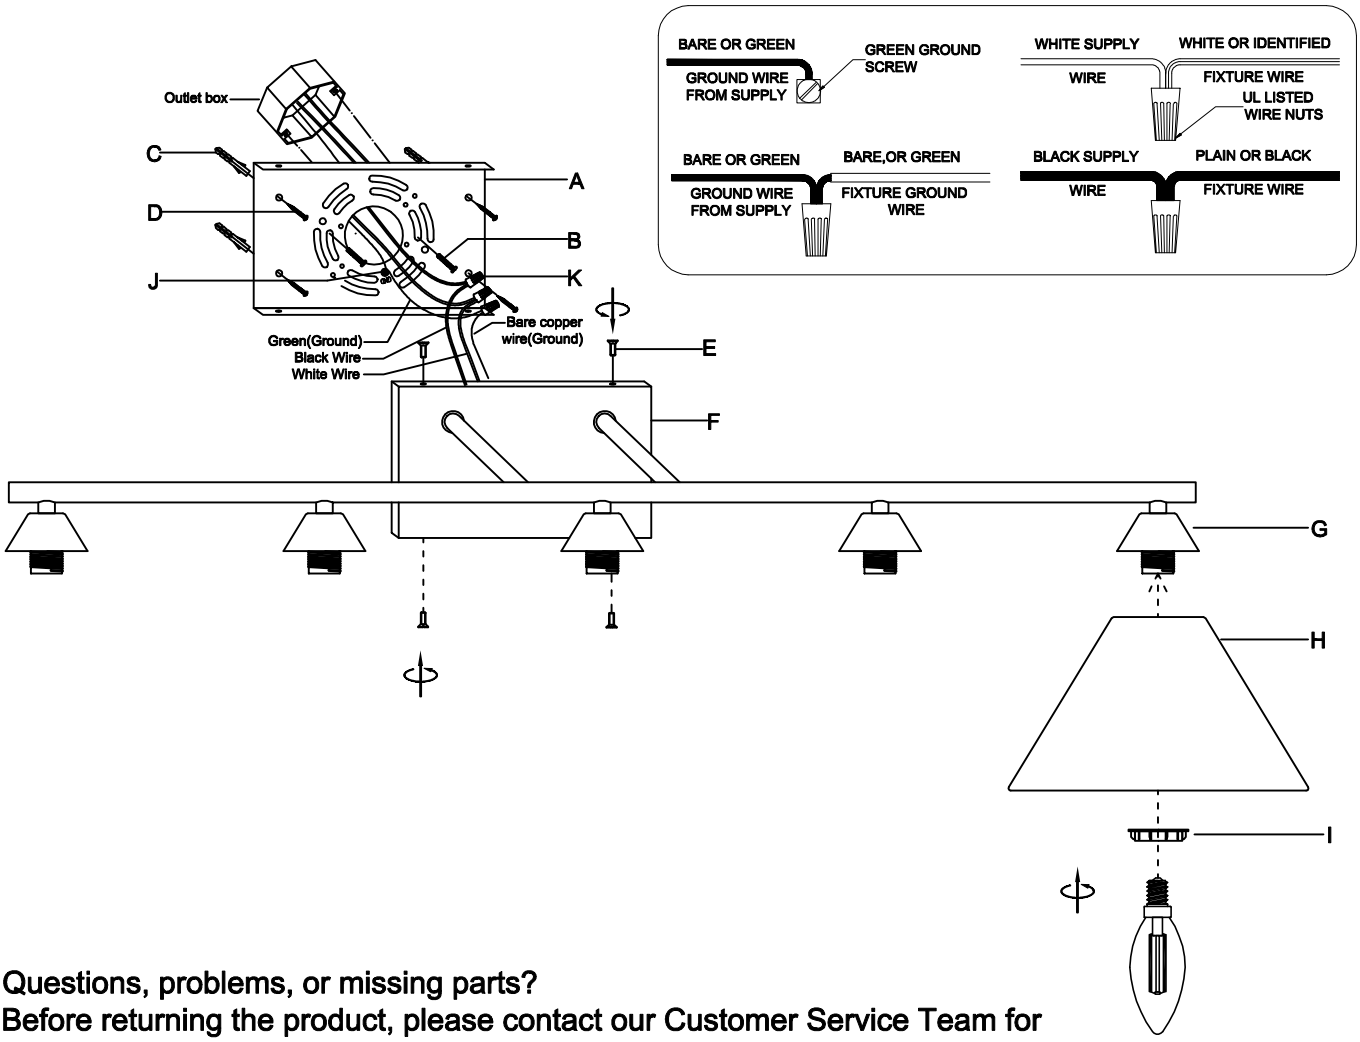
| PIECE | DESCRIPTION |
|---|---|
| A | Mounting bracket |
| B | Junction Box Screw |
| C | Wall Anchor |
| D | Wood Screw |

| PIECE | DESCRIPTION |
|---|---|
| E | Mounting Screw |
| F | Fixture Body |
| G | Socket |
| H | Shade |

| PIECE | DESCRIPTION |
|---|---|
| I | Retaining Ring |
| J | Green ground screw |
| K | Wire nut |

## INSTALLATION

1.Position the mounting bracket (A) over the junction box and mark the mounting holes. Drill the holes and insert the wall anchors (C). Secure the mounting bracket (A) to the junction box with the junction box screws (B), then fasten it to the wall with the wood screws （D）.
2.Secure the supply ground wire (green or bare copper) to the green ground screw (J), then connect it to the fixture ground wire using a wire nut (K). Connect the supply white wire to the fixture white wire using a wire nut (K), then connect the supply black wire to the fixture black wire using a wire nut (K).
3.Attach the fixture body (F) to the mounting bracket (A) and secure it with the mounting screws (E).
4.Place the shade (H) over the socket (G), then secure it with the retaining ring (I).
5.Install LED bulbs (not included) into the sockets. CAUTION: Use LED bulbs only.




Questions, problems, or missing parts?
Before returning the product, please contact our Customer Service Team for the quickest solution.

Customer Service Email: lighting_service@outlook.com