


Features

- Acrylic
- VibrAcoustic technology emits sound waves and offers a surround sound experience
- Six transducers and a control amplifier with 25' (7.6 m) of wiring
- User-friendly high-resolution color touch screen in polished chrome
- Molded lumbar support for comfort
- Drop-in installation
- Reversible drain
- 66" (1676 mm) x 42" (1067 mm) x 22" (559 mm)

5.5' VIBRACOUSTIC® DROP-IN BATH K-1170-VB

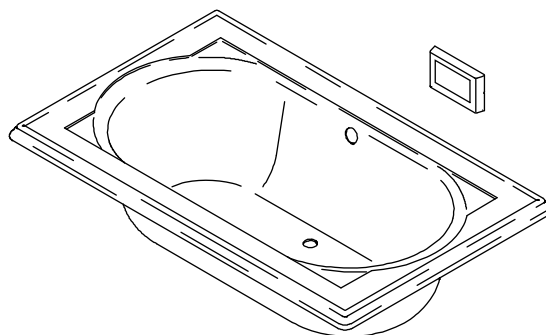

Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124
- UL 1795

Colors/Finishes

- 0: White
- CP: Polished Chrome
- BN: Brushed Nickel
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1170-VB	5.5' VibrAcoustic drop-in bath	☐ 0	☐ Other_____

Recommended Accessories

K-7161-AF	Pop-up drain - above-the-floor installation OR	☐ CP	☐ Other_____
K-7213	Cable drain with PVC tee and pipe OR	☐ CP	☐ Other_____
K-7214	Cable drain without PVC tee and pipe OR	☐ CP	☐ Other_____
K-7265	Toe-tap drain	☐ CP	☐ Other_____

Optional Accessories

K-1491	Bath pillow	☐ 0	☐ Other_____
K-1601	Bath footstop	☐ 0	☐ Other_____
1172315	VibrAcoustic interface mounting plate (non-CP finish)		☐ BN

Product Specification

The acrylic VibrAcoustic bath shall be 66" (1676 mm) in length, 42" (1067 mm) in width, and 22" (559 mm) in height. Bath shall be for drop-in installation. Bath shall feature VibrAcoustic technology offering a surround sound experience. Bath shall have six transducers and a control amplifier with 25' (7.6 m) of wiring. Bath shall feature user-friendly high-resolution color touch screen in polished chrome. Bath shall have molded lumbar support for comfort. Bath shall feature reversible drain. Bath shall be Kohler Model K-1170-VB-_____.

Technical Information

Fixture*: Bathing well:			
Basin area, bottom	42" (1067 mm) x 27" (686 mm)		
Basin area, top	54" (1372 mm) x 30" (762 mm)		
Weight	91 lbs (41.3 kg)		
To overflow:			
Water depth	16" (406 mm)		
Capacity	81 gal (306.6 L)		
*Approximate measurements for comparison only.			
Drop-in cutout		64-1/2" (1638 mm) x 40-1/2" (1029 mm)	
Amplifier/control:	Power per channel	V	Hz
	15 (rms) W	120	50/60z

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):
Amplifier/control: 120 V, 15 A, 50/60 Hz

Installation Notes

Install this product according to the installation guide.


Control amplifier fits 16" (406 mm) center studs. A grounded outlet within the wall framing must be within 24" (610 mm) of the planned control amplifier.

Cables are included, 25' (7.6 m) each.





Floor support under this product must provide for a minimum of 41 lbs/square foot (200.2 kg/square meter) loading.

If installing a rim-mount faucet, make sure there is no interference with drain overflow before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

Ensure that the bath, user interface, amplifier, and transducers are functional before completing the installation.

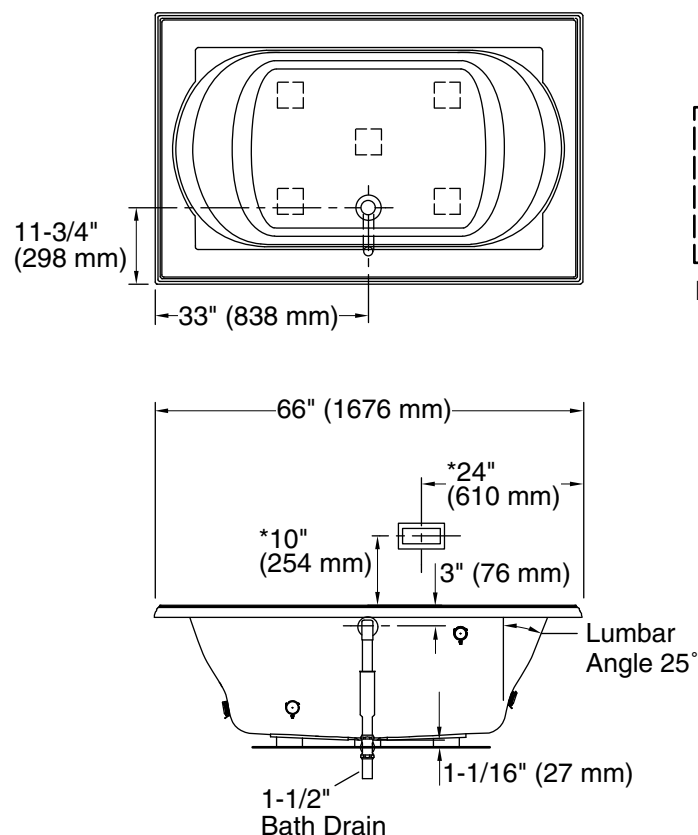

No change in measurements if connected with drain illustrated. (K-7161-AF)

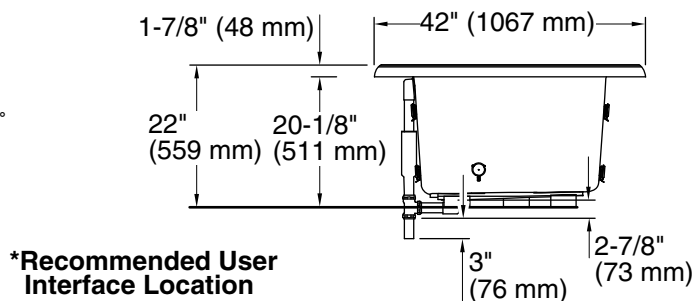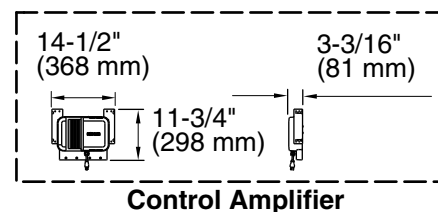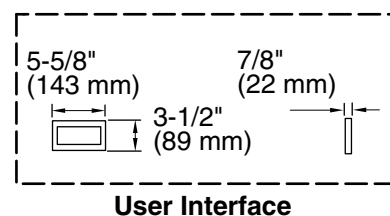

Product Diagram