



**Stargaze®**  
60" x 34" freestanding bath with Bask®  
**K-24010-W1**

**Features**

- Three heat settings allow you to customize the surface temperature.
- Freestanding design creates a striking focal point in your bathing area.
- Sloped lumbar support on both ends.
- 18" bathing depth offers a deep soaking experience.
- Wide deck along one side simplifies installation and provides support for getting in and out of bath.
- Straight shroud.
- Textured bottom surface.
- Center drain.

**Material**

- Acrylic.

**Installation**

- Freestanding.

**Recommended Accessories**

K-37380 30" Rough-in Cable Bath Drain  
K-24916 Wireless Music Kit  
K-T37391 Bath Cable Drain Trim  
K-T37392 Bath Cable Drain Trim  
K-T37393 Bath Cable Drain Trim  
K-T37394 Bath Cable Drain Trim  
K-T37395 Bath Cable Drain Trim  
K-T37396 Bath Cable Drain Trim  
K-T37397 Cable Bath Drain Trim  
K-7265 Clearflo Bath Drain  
K-37383 30" Rough-in Cable Bath Drain  
K-37386 rough-in cable drain, PVC, 30" cable



**Codes/Standards**

None Applicable



**KOHLER® Hydrotherapy Components**  
**Five-Year Limited Warranty**  
**KOHLER® Plastic Baths and Receptors**  
**Lifetime Limited Warranty**

See website for detailed warranty information.

**Available Color/Finishes**



*Color tiles intended for reference only.*

**Color Code Description**


	0	White
	96	Biscuit

No change in measurements if connected with drain illustrated. (K-37386)

□ Recommended Faucet Location

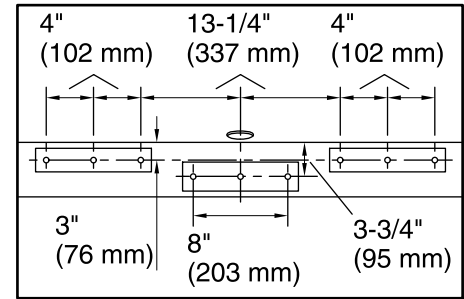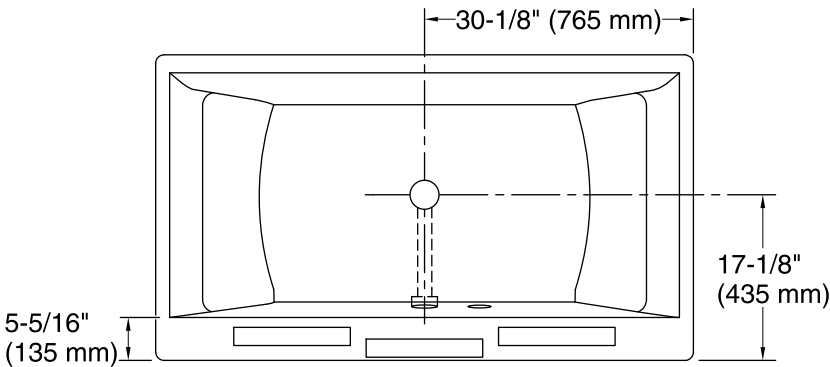

**Recommended Faucet Hole Location**

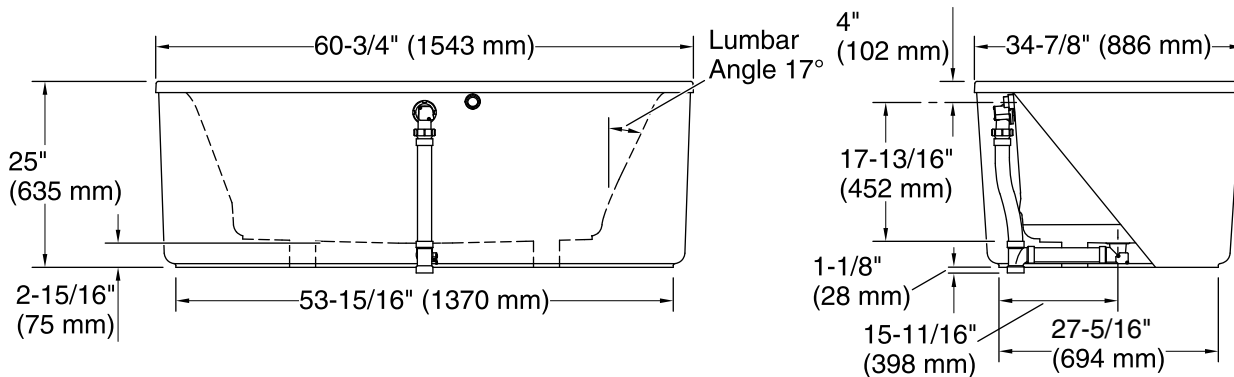

### Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Heated Surface: 120 V, 15 A, 60 Hz

### Technical Information

All product dimensions are nominal.

Installation:	Freestanding
Basin area, bottom:	40-5/16" x 22-1/2" (1024 mm x 572 mm)
Basin area, top:	49-3/8" x 25-7/8" (1254 mm x 657 mm)
Weight:	156 lbs (70.8 kg)
Minimum floor load:	54 lbs/ft² (263.7 kg/m²)
Water depth:	18" (457 mm)
Water capacity:	60 gal (227.1 L)
Template:	1364289, not required, not included
Electrical component rating:	Heated Surface: 120 V, 0.5 A, 50/60 Hz, 65 W

### Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference above or below the deck before drilling any holes.