Installation Manual

CRITICAL DIMENSIONS

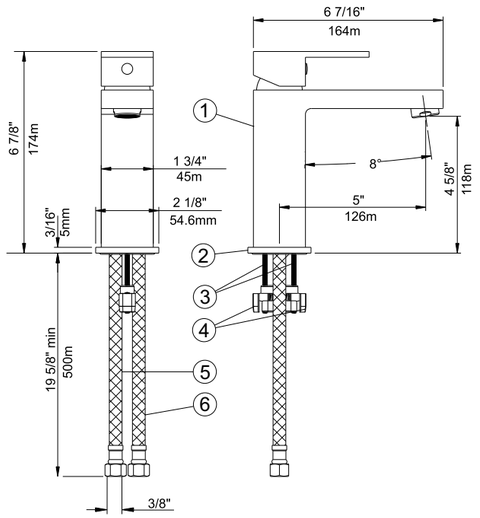

1-Main body 2-Flange 3-Bolts 4-Slider
5-Hot water inlet hose 6-Cold water inlet hose

1

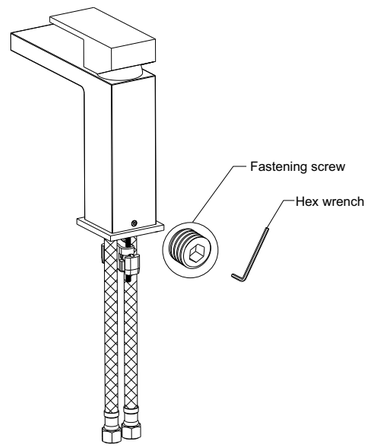

1. Loosen the screw behind the faucet with a hexagon wrench to detach the quick-install fitting from the faucet.

2

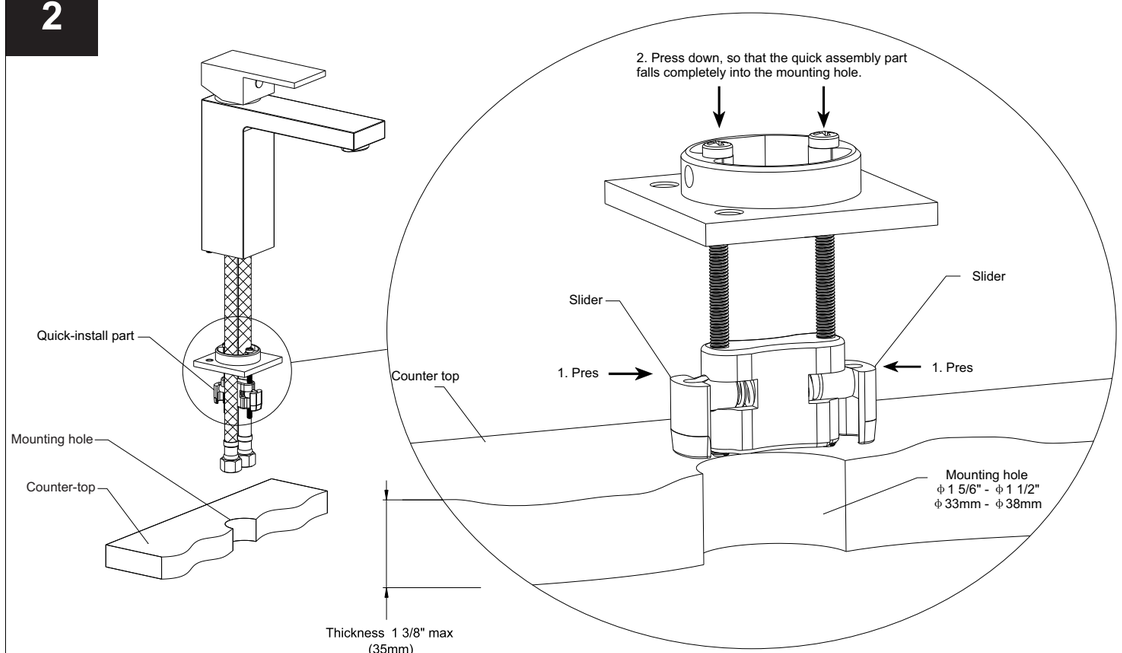

2. Press the sliders on both sides, and put it into the mounting hole. Press down the quick mounting upper part by hand to make the quick mounting slider falls completely below the mounting hole. Sliders rebound automatically.

3

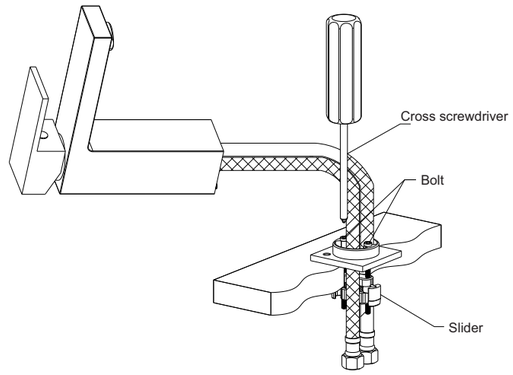

3. Make sure the slider part is completely under the countertop and tighten the bolts with a screwdriver.

4

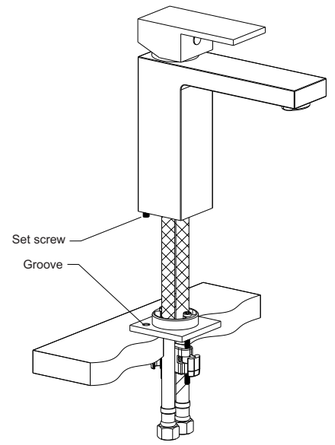

4. Adjust the position of the screw, until it is aligned with the groove.

5

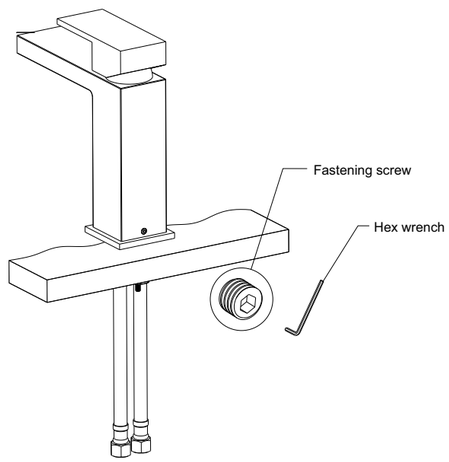

5. Tighten the screw with a wrench, fix the faucet.

6

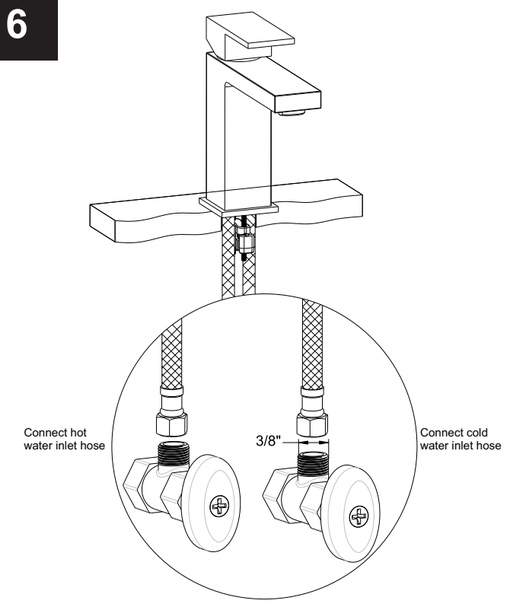

6. Attach flexible hoses to water supply.

front

back