



Sunward® | K-1162-GHW

60" x 42" drop-in Heated BubbleMassage™ air bath with Bask® heated surface

Features

- 120 airjets release thousands of heated bubbles that surround and support the body in a warm massage
- Variable-speed blower lets you adjust massage intensity to 18 levels
- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck
- Built-in heater
- Automatic and manual purge cycles remove residual water from air channels after use
- 60-minute automatic shutoff timer
- Oval basin creates a spacious bathing experience
- Integral lumbar support and armrests offer extra comfort while bathing
- Keypad control
- Textured bottom surface
- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|----|---------|
| 0 | White |
| 96 | Biscuit |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

7-30-2026 01:55 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ASME A112.19.7/CSA B45.10
CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
UL 1795
CSA C22.2 No. 218.2
cUL Listed
UL Listed

Technical Information

All product dimensions are nominal.

Drain Location:	Reversible
Drain Hole Diameter:	2-1/8" (55 mm)
Basin Area, Bottom:	43-3/16" x 21-1/2" (1097 mm x 547 mm)
Basin Area, Top:	53-1/2" x 32-3/16" (1359 mm x 817 mm)
Water Depth:	15" (381 mm)
Water Capacity:	57 gal (215.8 L)
Minimum Floor Load:	35 lbs/ft ²
Weight:	150 lbs (68 kg)

Material

- Acrylic

Recommended Products/Accessories

K-576 Undermount kit for select 60" Sunward bath and whirlpool bath models
K-1446 Remote installation kit for BubbleMassage™ air baths
K-1491 Bath/whirlpool pillow, removable
K-1601 Bath/whirlpool footstop, removable
K-11677 Adjustable drain, 20-gauge brass, for 18-1/2" to 20-1/2" baths
K-7265 Brass toe tap bath drain
K-7213 Cable bath drain with PVC tubing
K-7214 Cable bath drain, less PVC tubing

Technology

- Heated BubbleMassage™ technology warms and humidifies air before it enters the bath

Required Electrical Service

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Blower, Heated surface:	120 V, 15 A, 60 Hz
Heater:	120 V, 15 A, 60 Hz

Electrical Component Ratings

Blower:	120 V, 10 A
Heated surface:	120 V, 0.5 A, 60 Hz, 65 W
Heater:	120 V, 5 A, 60 Hz



Warranty

See website for detailed warranty information.

KOHLER® Plastic Baths and Shower Bases Lifetime Limited

Warranty|KOHLER® Hydrotherapy Components Five-Year

Limited Warranty




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

7-30-2026 01:55 - US-CA

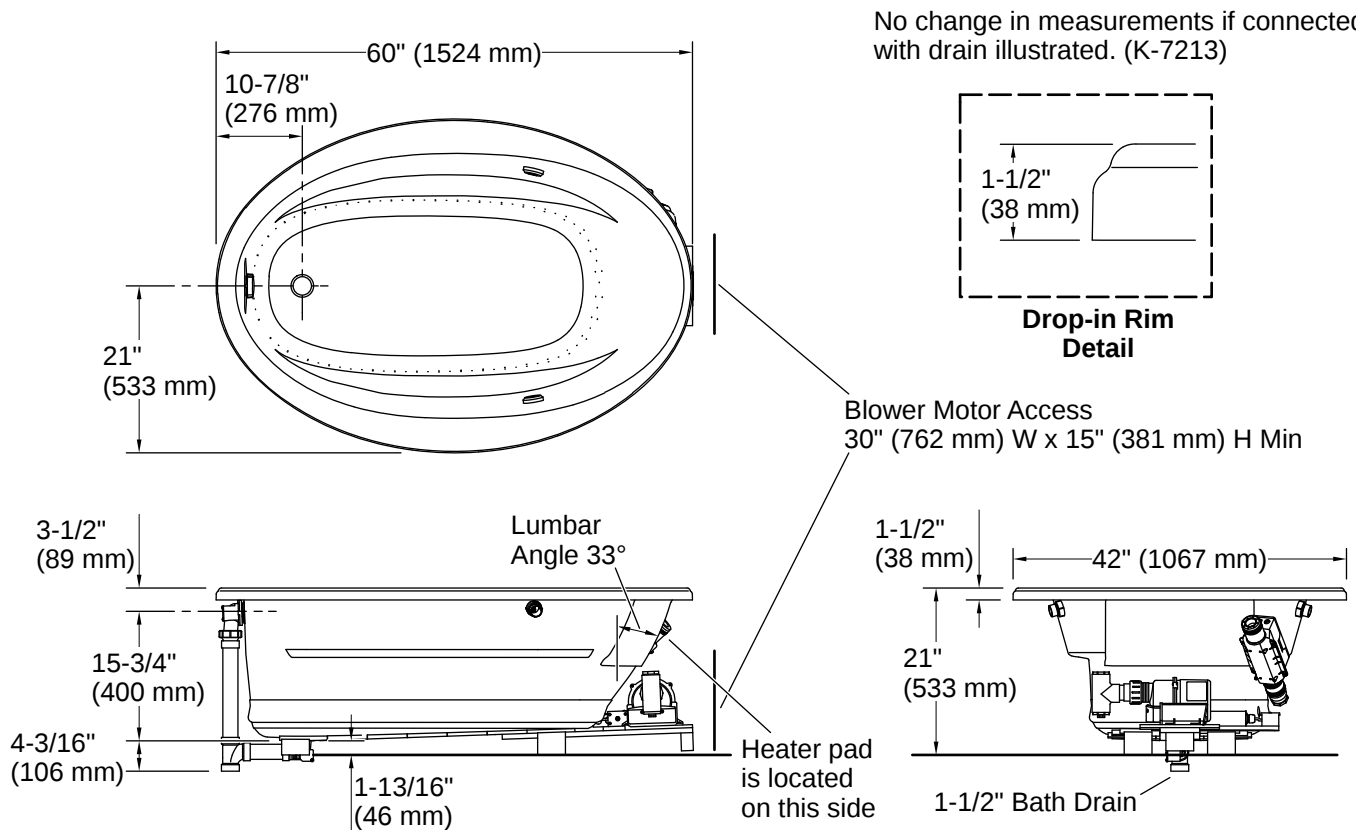

Installation

- Drop-in or undermount
- Reversible drain

Installation Notes

Install this product according to the installation instructions.

Measure your actual product for rough-in details.
The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

