

OPERATING MANUAL

BEDIENUNGSANLEITUNG
LED MIRROR

Steps for Wiring a Modified Wall Switch

1. Turn off the main power supply before starting.
2. Use tape or a marker to distinguish between the two wires: the wire with the wide connector tab is the live wire, and the wire with the narrow connector tab is the neutral wire. Then, cut off the plugs, strip the insulation, and connect the wires accordingly (connect the live wire to the household live wire and the neutral wire to the household neutral wire).
3. Securely wrap all wire connections with electrical tape.

Safety Warning

Use a voltage tester to check the actual wall wiring before connecting; reversing polarity creates a risk of electric shock or fire. If you lack professional wiring experience, please contact a licensed electrician to perform the work.

Before installation, please check to make sure these functions work properly:

Light Dim Switch:



1. Short press this button to turn on - white light - warm light - warm white light - turn off the light.
2. Long-press this button to adjust the brightness of the light. Dimmable range 10%-100%.

PACKAGE CONTENTS:



expansion screws * 2



Screws * 2



Cleaning cloth * 1



plug * 1

INSTALLATION TOOLS:



Electric rotary



Ruler



Hammer



Gloves




Screwdriver

SAFETY INSTRUCTIONS




1. Please read the instructions carefully before use.
2. Make sure the wall can bear the weight of the mirror.
3. Do not use ropes or chains to hang the product.
4. Before starting the electrical installation, the main power supply must be disconnected.
5. All electrical products should be installed by a qualified National Electrical Code (NEC) .
6. Before drilling, make sure there are no hidden electrical wires or pipes in the wall.
7. Keep your belongings away during the installation to avoid any damage.
8. Please note the following when modifying a wall switch:
This switch only provides power and cannot control the lights; light switching, three-color illumination, and brightness adjustment can only be achieved via the touch switch button.

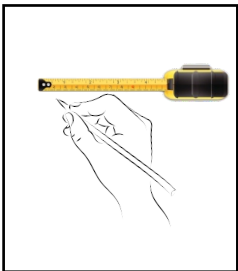


Step 1:
Use a ruler to draw a straight line to keep the mirror level.




Step 2:
Drill two or four holes depending on the screws you received.

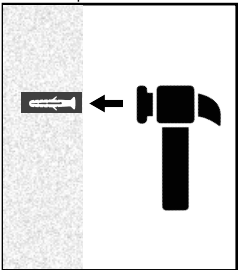

Step 3:
Use a hammer to hammer in the expansion tube.

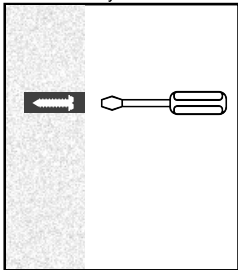

Step 4:
Drill two or four holes depending on the screws you received.

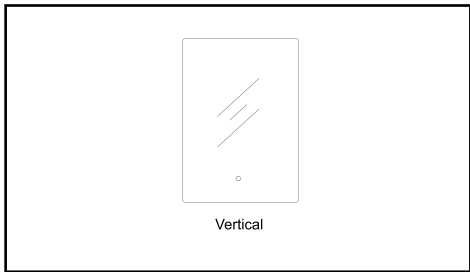

Step 5:
Hang the mirror on the wall screws.

- a. Wipe with a clean dry cloth before use.
- b. Check all screws and bolts for tightness every three months or as needed.
- c. Clean with glass cleaner or detergent.