


KITCHEN FAUCET INSTALLATION

Installation Condition

1. Connect supply hose to angle valve. Left hose to hot water supply, and right hose to cold water supply.
2. Determine supply hose and angle valve have been installed and cleaned, also ensure no impurities in pipeline.
3. When finished installation, check all joints and connections for leaks.
4. Water pressure shall be: 0.05 Mpa Water Pressures 0.75 Mpa. (Include cold water pressure)




RECOMMENDED TOOLS

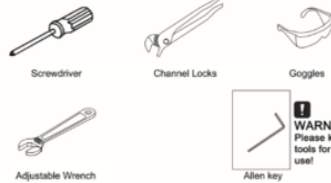

Attention:
for easy installation, you will need:
1. To read these installation instruction completely before beginning.
2. To observe all safety warning, attention and maintenance.
3. To purchase the proper supply lines.

Ensure that the water supply below your sink is completely shut off by turning the shutoff valves clockwise.


3. Place a small bucket below your workspace to catch any water that may drip during installation.




2. Remove the rubber sealing ring, metal washer, and lock nut from the faucet body.



You can freely choose whether to install the basin faucet base plate

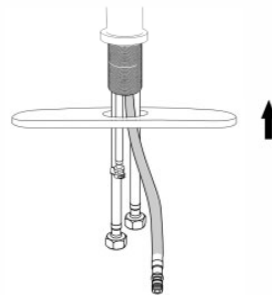


3. Pass the main body through the sink hole.

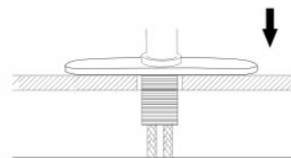


KITCHEN FAUCET INSTALLATION


From under the sink, slide the rubber washer and brass gasket lock onto the faucet body. Tighten the locknut clockwise onto the threaded rod by hand, then finish tightening securely with an adjustable wrench.

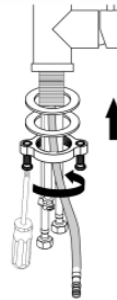


Push the quick connector firmly upward and attach it to the ceiling block. Pull down gently to confirm the connection is secure.

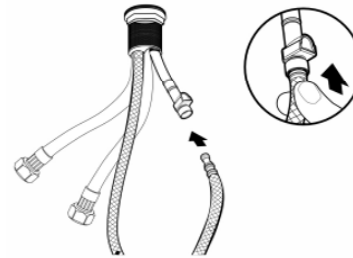


Hand-tighten the locknut, then use a Phillips screwdriver to tighten the screws on the locknut until firmly secured. (Note: The gravity ball mounted on the extendable/liftable braided hose.)

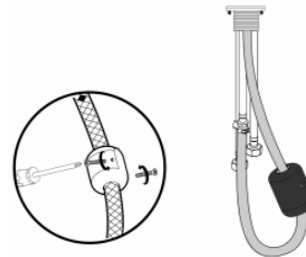

7. Connect the two inlet hoses from the faucet to the angle valves: attach the red hose to the hot water supply and the blue hose to the cold water supply.

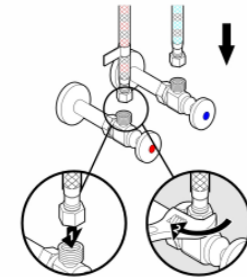

8. Turn on the water supply line valves.



Turn the faucet on and ensure that there are no leaks. Check to ensure that both hot and cold water are running properly. Turn on the hand sprayer function and allow the sprayer to run for another 60 seconds, and check for any leaks.

CLEARANCE AND MAINTENANCE

To maintain the faucet's finish and ensure optimal performance, please follow these cleaning and maintenance guidelines:

1. Clean with water and dry with a soft cotton cloth.
2. Use a mild liquid detergent or a non-abrasive cleaner to remove surface dirt and limescale; a colorless glass cleaner is also suitable.
3. Do not use harsh detergents, polishing tools, abrasive cloths, paper towels, or scrapers to clean the faucet.
4. Do not use acidic cleaners, insoluble granular detergents, soaps, or similar harsh substances to clean the faucet.