



Components:

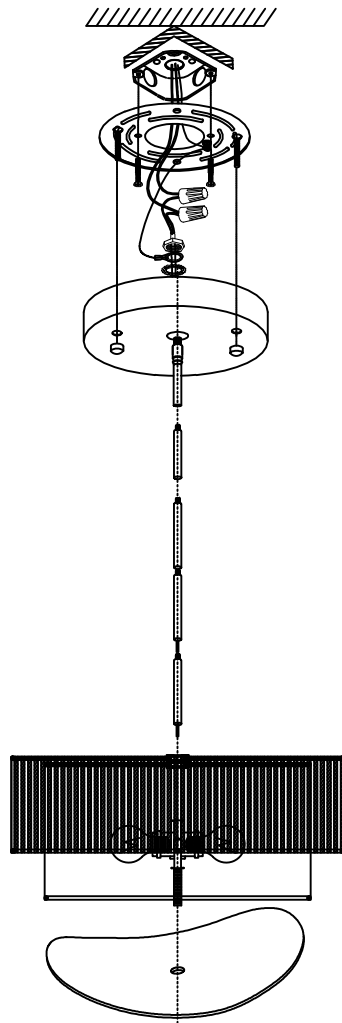


Installation:

Open the package to check that all the components in the packing list are included

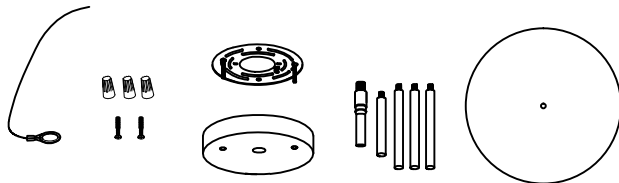


Part I :



Fix the hanging plate on the junction box.

Part2:

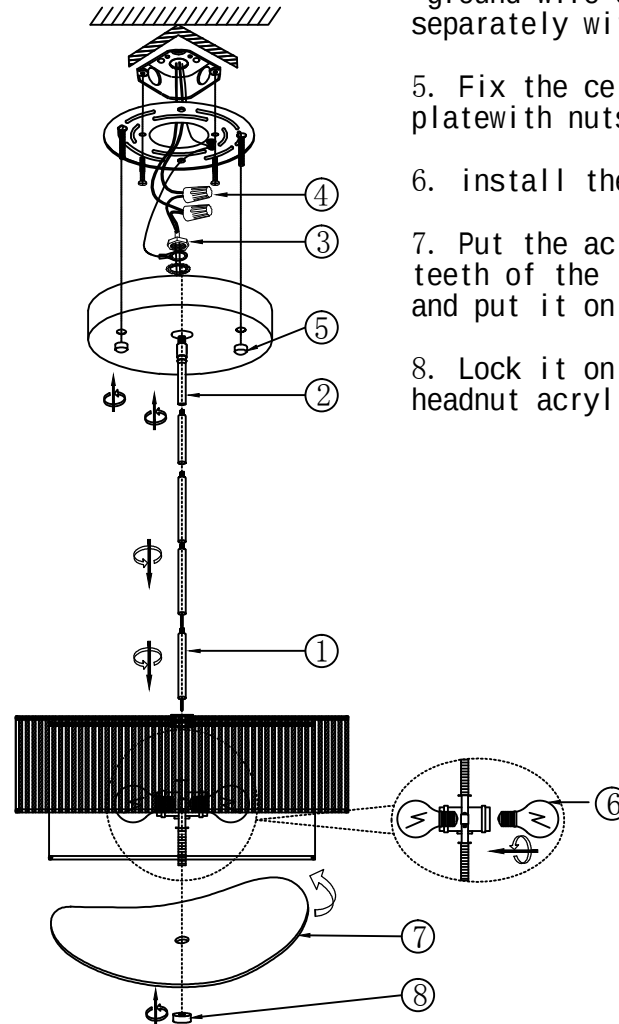

1. Fix the boom on the lampshade, and then lock the other booms in turn.
2. Lock the boom with universal head on the boom.
3. Lock the ground wire and ceiling disk on the universal head boom with nuts.
4. Connect the positive pole, negative pole and ground wire of the main line and powerline separately with the connecting cap.
5. Fix the ceiling disk on the hanging plate with nuts.
6. install the bulbs
7. Put the acrylic sheet through the middle teeth of the lampshade (Bend into an arc) and put it on the lampshade.
8. Lock it on the lampshade with a flat headnut acrylic sheet.