



Aquifer® | K-30646

Showerhead filter

Features

- Designed to work with handshowers to reduce chlorine and odor in water
- Reduces chlorine and odor, and controls scale
- Reduces skin dryness and irritation and is gentle on hair
- Filter system attaches to most exposed shower valves, handshower hoses and wall elbows with a simple threaded connection
- 4.0 gpm (15.1 lpm) maximum flow rate at 20 psi (1.3 bar)
- Filter media lasts up to 8,000 gallons (30,000 liters) or six months
- Recommended filter cartridge replacement every six months
- Intuitive filter replacement indicator
- Includes one filter cartridge
- Simple, elegant design to complement a variety of bathroom styles



Available Colors/Finishes

Color tiles intended for reference only.

CP Polished Chrome



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-10-2026 17:14 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

None Applicable

Technical Information

All product dimensions are nominal.

Flow Rate

Shower/Rainhead Rated 4 gpm (15.1 l/min)

Maximum Flow:

Material

- Solid metal and acrylic construction

Recommended Products/Accessories

K-30647 Showerhead replacement filter, two-pack

K-76330 Shower arm with 3-way diverter

K-76332 Wall-mount rainhead arm with 3-way diverter

K-76333 Wall-mount arm for rainhead/showerhead and handshower with 2-way diverter

K-76336 Rainhead arm with 3-way diverter

K-76337 Rainhead arm with 2-way diverter

K-76331 Shower arm with 2-way diverter

Warranty

See website for detailed warranty information.

KOHLER® Water Filter Systems Five-Year Limited Warranty




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

8-10-2026 17:14 - US-CA

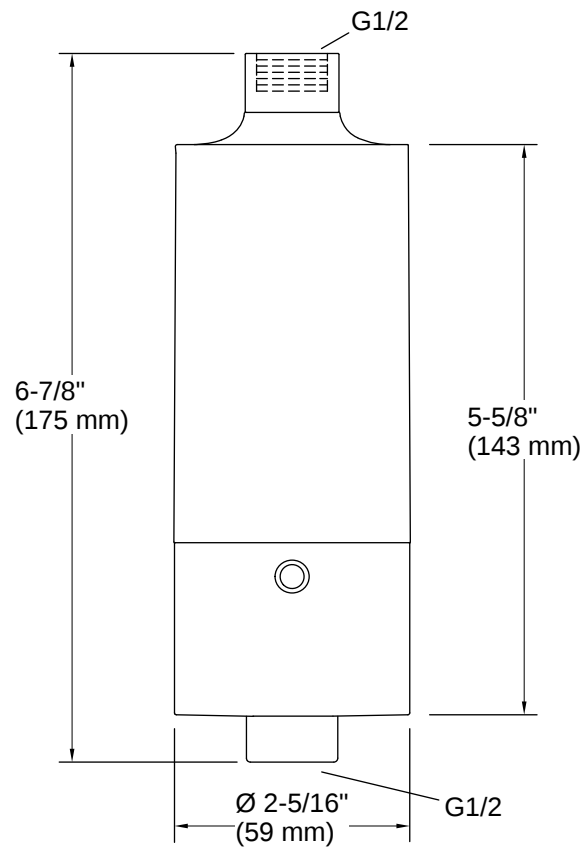

Installation Notes

Install this product according to the installation instructions.

Replace filter cartridge every 6 months.

