


POSITANO FLAME TOWER COLLECTION

LAVA LITE

OUTDOOR FLAME TOWER HEATER

The 2G's sister tower and the most adaptable in the Positano collection — the same 92-inch column of flame, delivered fully assembled or flat-pack.

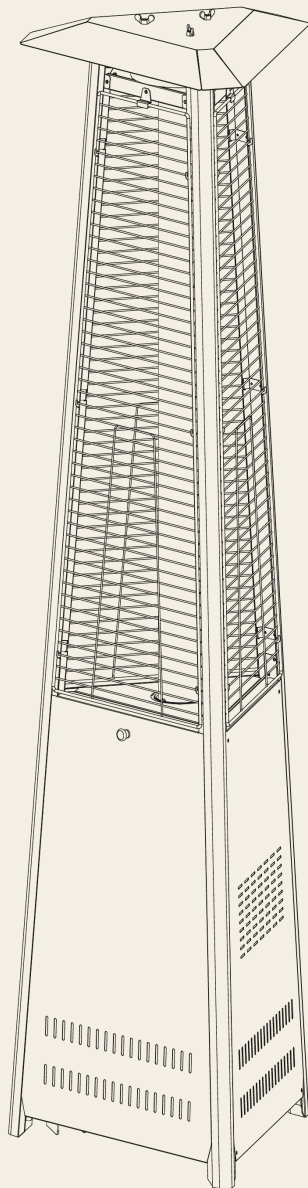

92" H × 22" W

TRUBTU™ COMFORT ZONE ON A 50°F EVENING

74°
AT 2 FT

66°
AT 5 FT

60°
AT 7 FT

7 ft heat radius · approx. 154 sq ft of 360° warmth.
Measured air temperature at distance — our own standard, not a theoretical output figure.

FUEL

Liquid propane or natural gas
· bio-LP ready, no conversion needed

CONTROL

Electronic ignition with
manual Clima-Comfort at the control valve

RUN TIME

LP: up to approx. 12 hours per
concealed 20 lb cylinder

ARRIVES

Assembled or flat-pack · 92" ×
22" · 85 lb

FRAME

304-grade stainless panels
on marine-grade 6061-T6
aluminum, with a 430-
grade stainless emitter.

GLASS

A borosilicate column
carries the flame the full
height of the tower,
removable for cleaning.

WARRANTY

Lifetime limited on frame
and structure. Five years
on parts and finish.

LINEAGE

Built on the original
flame-tower design
brought from Italy.
Specified worldwide since
2001.

LAVA LITE


POSITANO FLAME TOWER COLLECTION

TECHNICAL DATA

SPECIFICATIONS

MODEL	The Lava Lite · LHI-LAVALITE
TRUBTU™ (50°F)	74° at 2 ft · 66° at 5 ft · 60° at 7 ft
HEAT RADIUS	7 ft, 360° · approx. 154 sq ft
CERTIFIED INPUT	42,000 BTU/hr
FUEL	Liquid propane (20 lb cylinder in the base) or natural gas, supplied with a 10 ft quick-connect hose · bio-LP compatible
RUN TIME	LP: up to approx. 12 hours per 20 lb cylinder · NG: continuous
CONTROL	Electronic ignition · manual Clima-Comfort at the control valve
BATTERIES	AA (igniter)
SIZE	92" H × 22" W · 85 lb · two wheels
MATERIALS	430 stainless emitter · 304 stainless panels · marine-grade 6061-T6 aluminum · borosilicate glass
CERTIFICATION	CSA certified, file 220535 · 500-hour ASTM B117 salt-spray tested
SAFETY	Tilt-switch auto shutoff · thermocouple flame-failure protection
GAS PRESSURE	NG 4–7 in WC · LP 11–14 in WC · NG supply line ¾" ID minimum
APPLICATION	Outdoor use only · residential and commercial
SHIPS	Fully assembled, or flat-pack (two people, about 90 minutes)
CARTON	Flat-pack 25.2 × 25.2 × 29.5 in · 79.2 lb · Assembled 18 × 18 × 96 in triangular · approx. 72 lb

CLEARANCES

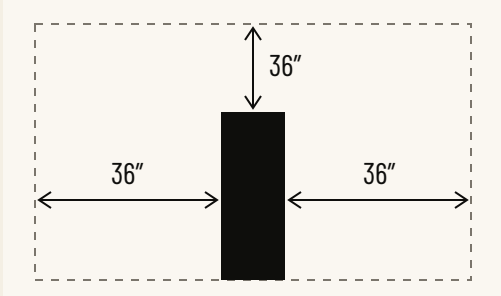

Minimum to combustibles. Under cover, no more than three side walls, with at least 30% of the perimeter permanently open.

WARRANTY

Frame and structure	Lifetime
Parts	5 years
Finish	5 years
Burner and glass	1 year
Hose and regulator	1 year

Limited, parts only. Residential and commercial on identical terms.

FINISHES

STOCKING

- Stainless Steel
- Heritage Bronze
- Hammered Black

Amalfi Studio · eight RAL colors

Amalfi Architecture · seven Corsa mattes

Made to order. Colors shown are indicative.



940 W. Washington Blvd., Los Angeles, CA 90015
310-559-1700 · customerservice@lavaheat.com

LAVAHEAT.COM
SPECIFICATIONS SUBJECT TO CHANGE
LHI-LAVALITE · REV. OCT 2026 · 2 / 2