

# SPECIFICATION SHEET

## BPL-500-FG

• Underwater Lights

• Fiber Glass

### Fixture Specifications:

**Housing:** Fiber Glass

**Wiring:** Fixture is prewired with a 15ft 18-2 waterproof cord.

**Finish:** BLK-Black

**Mounting:** Removable Mounting Bracket

**Socket:** GU5.3 socket


**Electrical Notes:** A 12V transformer is required.

**Lamp:** 12V, MR16 halogen bulb 20W standard, 50W Max.

LED lamps available in 3W/6W/9W, with  
2700K-warm white color temperature.

Voltage range for 12V halogen lamps are 11V-12.5V  
Voltage range for LED lamps are 8V-21V

**Warranty:** Limited five (5) year warranty on fixture housing and against manufacture's defects.

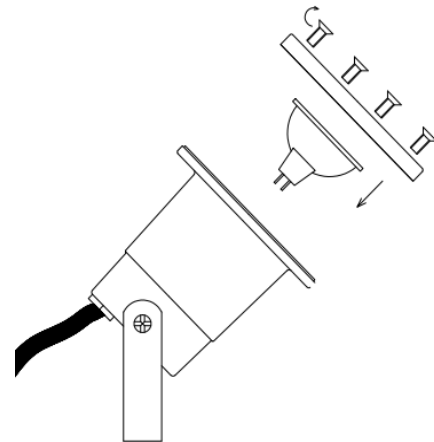

#### AVAILABLE LED LAMPS

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
3WMR16LED	3	38°	270	2700K	50000	20 Watt
6WMR16LED	6	38°	540	2700K	50000	35 Watt
9WMR16LED	9	38°	810	2700K	50000	50 Watt

#### AVAILABLE HALOGEN LAMPS

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS
		SPREAD	LUMEN		
MR16 20W	20	36°		2700K	2000
MR16 35W	35	36°		2700K	2000
MR16 50W	50	36°		2700K	2000

