

Keazile

Smart Light, Brighter Life.

Item No: KA06-84ASB6-BK

Contact us: support@keazile.com

Thank you for purchasing and using our product. If you encounter any issues during installation or usage, please contact us using the information provided above. We will respond promptly to assist you in resolving any problems. Please read this installation manual carefully before using the security product.



Safety Instructions

1. **Turn off the power** at the main fuse box or circuit breaker **before doing anything** with the fan. Don't get electrocuted.
2. **All wiring must follow your local electrical rules** or the National Electrical Code. **Hire a licensed electrician** unless you really know what you're doing.
3. **Wear gloves** if the fan parts are sharp. Don't slice your hands open.
4. Make sure the fan has **enough space to spin freely**:
 - At least **7 feet (2.13 m)** between the floor and the blades.
 - At least **18 inches (45.72 cm)** from any walls or upright surfaces.
5. **⚠ WARNING**: To avoid fire, electric shock, or getting hurt:
 - Only mount the fan to a **ceiling box rated for fan support**.
 - Use the **mounting screws** that came with the box.
 - If you're not sure the box is strong enough, **ask an electrician**.
 - Regular light fixture boxes usually **aren't strong enough** and might need to be replaced.
6. The **ceiling box and support structure** must be **securely attached** and able to hold **at least 45 kg** (about 100 lbs).
7. Be careful when installing or cleaning the fan to **avoid injury or damage**.
8. **Never use water or cleaning chemicals** on the fan. Use a **dry cloth** or a **slightly damp cloth** only.
9. After connecting the wires:
 - **Push the spliced wires up into the box**.
 - Keep the **grounded wires and grounding wire on the same side** of the box.
10. The wiring diagram is just a **reference**, not a step-by-step guide.
11. **Indoor use only**. Don't install this fan outside.


Package Contents

1. Shade & Light Plate — 1 Set
2. Fan Motor — 1 PCS
3. Canopy & Mounting Bracket — 1 Set
4. Coupling Cover — 1 PCS
5. Mounting Bracket Screws — 1 Pack
6. Blade Screws — 1 Pack
7. Balancing Kit — 1 PCS (optional)
8. Blade Arms — 6 PCS
9. Blade Arm Covers — 6 PCS
10. LED Light — 1 PCS
11. Blade Decorative Cover—6 PCS
12. 23.6" (60 CM) Downrod— 1 PCS
13. 11.8" (30 CM) Downrod— 1 PCS
14. 5.9" (15CM) Downrod— 1 PCS
15. Blades — 6 PCS
16. Remote Control & Receiver — 1 Set



Tools Required

Screwdriver, Ladder, Electrical Tape/Terminal Block (Not Included)

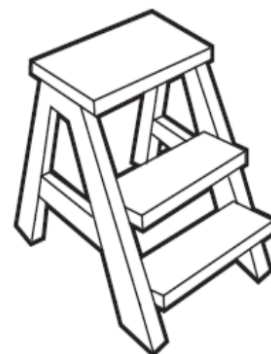

Installation Steps

Step 1: Open the Box and Check Parts

Open the outer box **carefully** to avoid damaging the contents.

All parts are well packed inside. (Figure 1)

Take everything out and lay it out for inspection.:



(Figures 1)

Step 2: Install the Blades

A. Line up the blade arm covers with the holes on the fan blades. (Fig. 2)



Figures 2

B. Align blade arms with blade holes. (Fig.3)

C. Use **5 screws** to secure each blade to the arm. (Fig. 4)



Figures 3




Figures 4

D. Loosen the **18 screws** on the motor. (Fig.5)

E. Attach the blades to the motor. (Fig.6)

F. Confirm all blades are installed. (Fig.7)

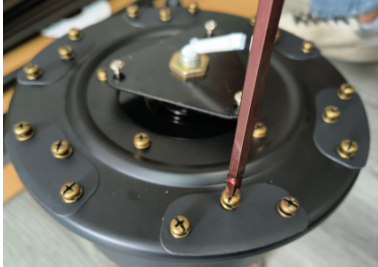

Figures 5



Figures 6



Figures 7

G. Line up blade cover holes with the blade holes. (Figure 8)

H. Use **2 screws** to secure the covers. (Figure 9)



Figures 8



Figures 9

Step 3: Install the Downrod

A. Choose **one downrod (5.9"/11.8"/23.6")** depending on your ceiling height.

B. Slide the **canopy** and **coupling cover** onto the downrod. (Fig. 10)

C. Loosen 2 screws at the top of the motor. (Fig. 11)

D. Pass the **wires from the motor through the downrod**. (Fig. 12)



Figures 10



Figures 11



Figures 12

- E. Connect the downrod to the motor using the **cross pin**. (Fig.13)
- F. Secure the cross pin with the **R-clip (Clamp Pin)**. (Fig.14)




Figures 13



Figures 14

- G. Tighten the 2 screws to fix the downrod to the motor. (Fig.15)
- H. Slide down the coupling cover. (Fig 16)

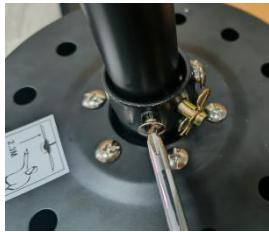


Figures 15



Figures 16

Step 4: Wire the Remote Receiver

Connect the motor wires to the remote receiver wires, match and connect wires by color coding. (Fig.17)

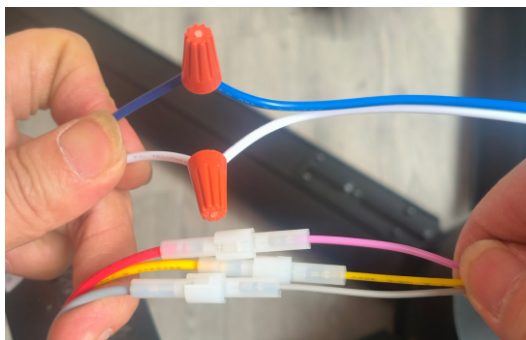

Figures 17

Step 5: Mount the Bracket to Ceiling

Choose one of the three installation methods based on your ceiling type.


A. **Solid wood (thicker than 9mm)** — Use the 2 wood screws provided. (Fig. 18)

B. **Concrete ceiling** — Use the 2 expansion bolts provided.

C. **A pre-installed standard junction box** — Direct installation is possible if it is rated for ceiling fan support. (Fig.19)



Figures 18

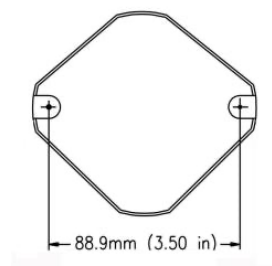


Figures 19

Important: Please make sure the bracket is secure and stable. If you notice any movement, please adjust it promptly to maintain stability.


Step 6: Hang the Motor on the Mounting Bracket

A. Hang the motor on the bracket as shown. (Fig. 20)

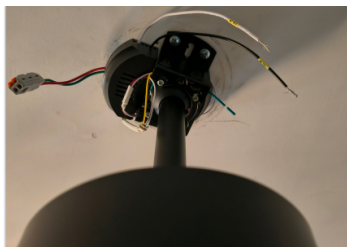


Figures 20

B. Make sure the two red-arrow points in the diagram line up perfectly. (Fig.21-22)

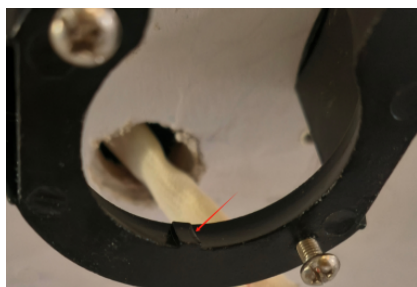


Figures 21

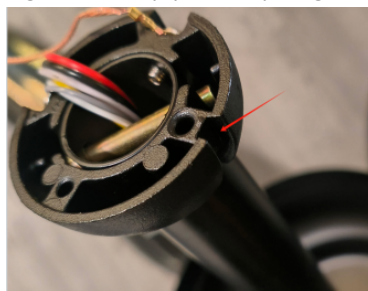

Figures 22

C. The image below shows the placement and positioning of the receiver. (Fig. 23)

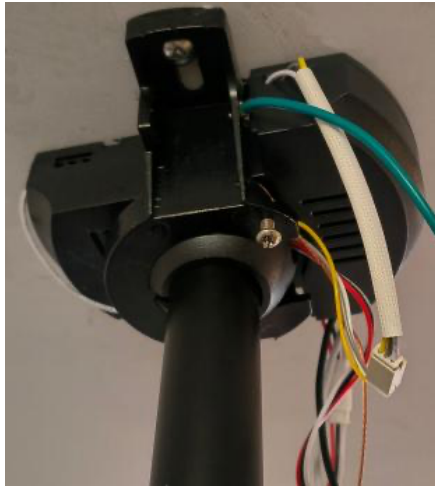


Figures 23

D. Connect the remote receiver wires to the ceiling wires (black = L, white = N) using one of these methods:

1. Electrical tape (not included)
2. Wire connectors (if available)
3. Provided orange wire nuts.

E. Half-loosen the two screws shown below. (Fig.25)

F. Loosen 2 screws on the bracket. (Fig.26)

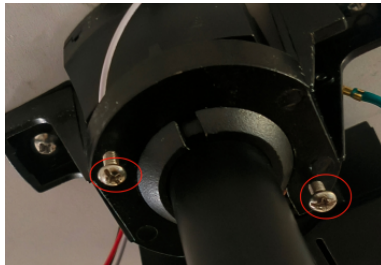

Figures 25




Figures 26


F. Slide the canopy up and screw it into the bracket with the 2 screws.

Step 7: Install the Light Plate

- A. Loosen 3 screws from the bottom of the motor — remove 1 completely, loosen 2.(Fig. 27)
- B. Line up the light plate and attach to the motor (Fig. 28)

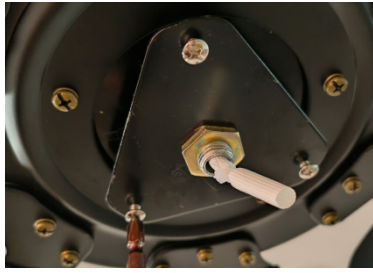

Figures 27

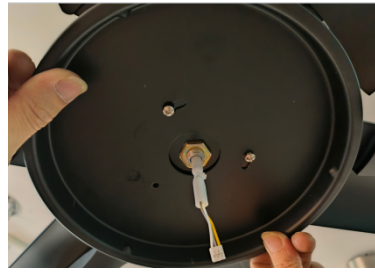

Figures 28

- C. Plug in the LED light wires.: (Fig. 29)
- D. Place the LED light into the plate.: (Fig. 30)




Figures 29



Figures 30

Step 8: Install Lampshade

- A. Screw the shade (lampshade) on clockwise. (Fig. 31)
- B. Check that everything looks like the final diagram. (Fig.32)

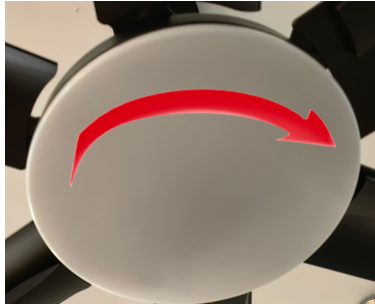

Figures 31



Figures 32

Step 9: (Optional) Mount the Remote Holder

1. Screw it into the wall. (Fig. 33)
2. For wood: screw directly.

3. For concrete: use the white plastic anchors first.
4. These parts are inside the remote package. (Fig.34)











Figures 33



Figures 34

Remote Function Guide

	WORD	Function declaration
		Turn off the main switch, fan and lights
		Turn the lights on and off
		R is reversed, clockwise direction, with wind on the top, used in winter; F is forward, counterclockwise direction, with wind on the bottom, used in summer.
		Turn off the fan
		Natural wind
		The fan has different Speeds. 1 is the minimum and 6 is the maximum.
		The fan works for 1/2/4 hours at a time, and the light source cannot be timed

Warranty & After Care:

Keazile products are warranted against defects in materials and workmanship under normal use. This warranty excludes damage from misuse, improper installation, or failure to follow care

instructions, as well as normal wear and tear. Please inspect your product upon delivery. Satisfaction is guaranteed within the terms of this warranty.

For assistance, please contact our team at support@keazile.com with your product's serial number and issue details. Our team will respond promptly to help.

Troubleshooting

If the fan or light doesn't work after setup:

- A. Check that the **power supply is on**.
- B. Double-check the **wiring** (refer to earlier steps).
- C. Still broken? **Contact customer service**.

Important Notes:

1. For indoor use only.
2. Avoid exposing the remote to extreme heat or moisture.
3. Periodically check screw tightness to prevent loosening due to vibration.

Thank You for Choosing Keazile!

We're committed to making your home brighter, safer, and more comfortable— you can trust and support you can count on.