


assembly instructions

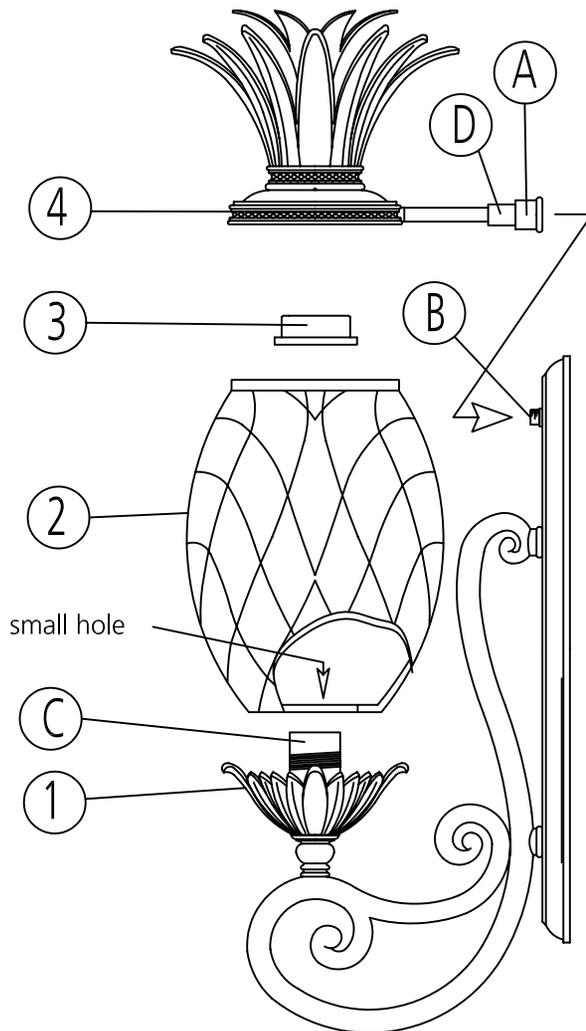

fixture assembly:

Step 1:

It is recommended that the main fixture body (1) be installed prior to assembling the fixture to prevent the glass from being broke during installation. Please follow the mounting instructions provided.

Step 2:

Glass installation;

1. Remove threaded socket ring (3) from socket (C).
2. Slip end of glass (2) with small hole over socket.
3. Thread socket ring (3) onto socket (C) and hand tighten to secure glass.
4. Lamp fixture accordingly Maximum wattage per lamp is 75 watts
5. Place roof (4) onto top of glass (2) making sure to line up collar (A and D) with the threaded tubing (B) on the backplate.
6. Thread collar (A) onto threaded tubing (B) on backplate. Then thread collar (D) up against collar (A) to secure Roof.

Instruction sheet

Note: Turn off power to junction box before proceeding.

1. Remove 4 ball knobs (4) from fixture and remove retaining plate (1).
2. Thread wires from junction box through 9/16" hole in retaining plate.
3. Remove appropriate knockouts and mount retainer plate (1) to outlet box (5).
Using the 2 screws (3) provided. Attach retaining plate to wall at the two extra mounting points indicated.
4. Attach fixture backplate to wall using 4 ball knobs (4).

Note: Continue assembly of fixtures using instructions on front side.

