

Installation & Assembly

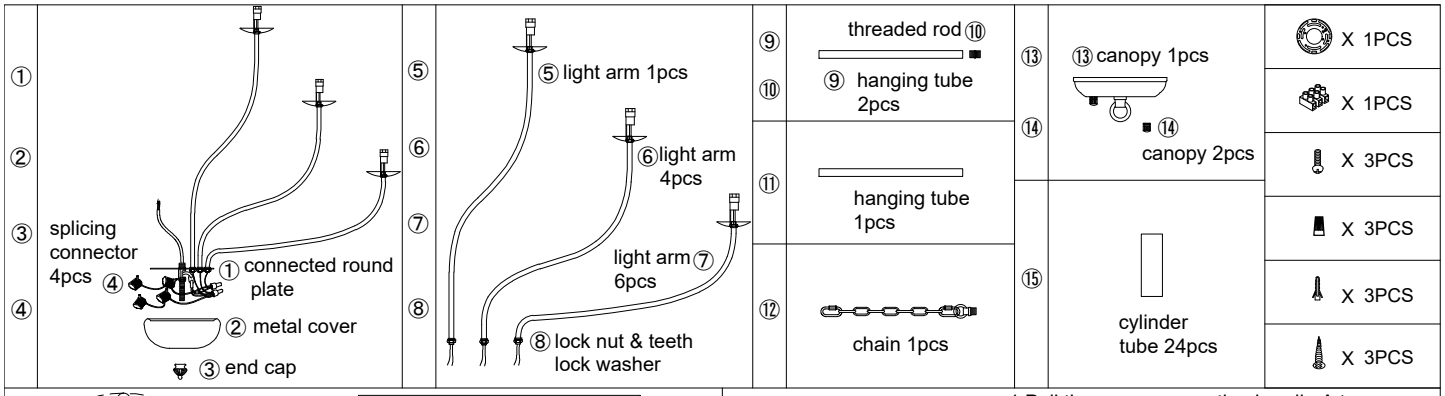


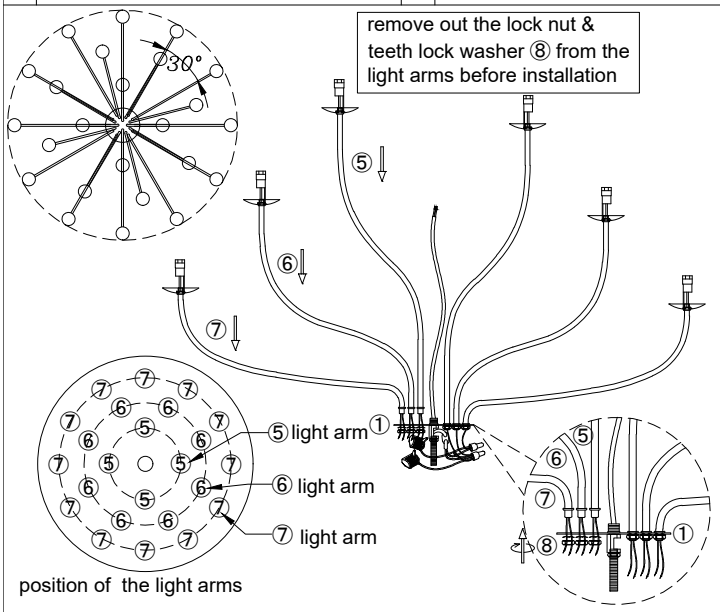


position of the light arms

1.Install the light arm ⑤, light arm ⑥, light arm ⑦ to the plate ① with lock nut & teeth lock washer ⑧.(please mind the position for the light arms like picture shown and adjust the light arms to suitable direction like picture shown after installation)


1.Pull the orange operating handle A to open the inlet hole, insert the wire B.
2.Press the operating handle A to finish wiring.
(Note: one inlet hole can put 2 or 3 wires inside)

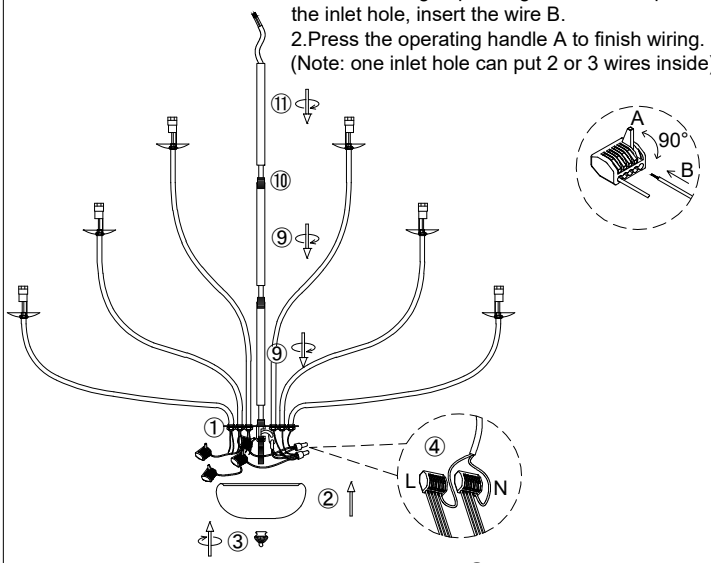

2.Connect all the wires by parallel with connectors ④(all live line-L use one connector, and neutral Line-N use another connector), close back the cover ② to the fixture with end cap ③.
3.Let the wire of the fixture go through the tube ⑨ and tube ⑪, rotate to install the tubes to the fixture.

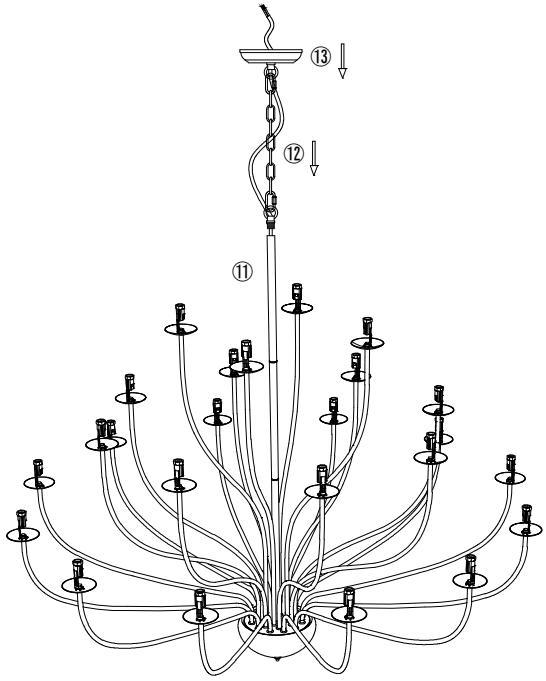

4.Hang the fixture to the canopy ⑬ with chain ⑫, let the wire go through the chain ⑫ and canopy ⑬.

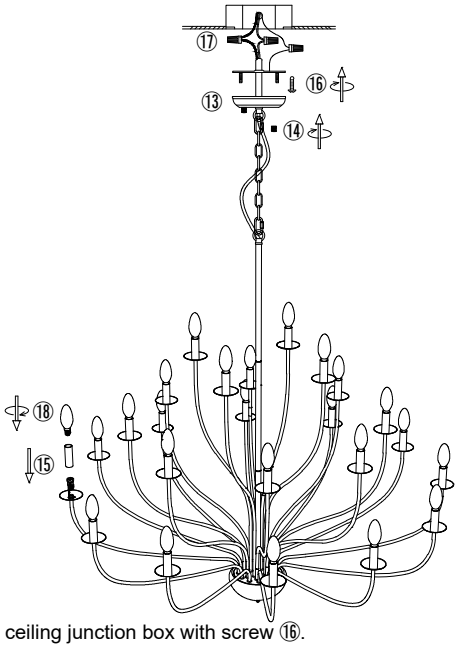

5.Install the bracket to the ceiling junction box with screw ⑯.
6.Connect the wire to your home line with cap connector ⑰.
7.Install the fixture to the bracket with cap nut ⑭.
8.Put the cylinder tube ⑮ to the bulb holder and install the bulb ⑱.
(bulbs are not included in the package)

Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !