


SUGGESTED TOOLS AND MATERIALS



Philips Screwdriver



Sealant



Tape Measure



Safety Glasses

PARTS / HARDWARE (INCLUDED ONLY WITH AVANITY STONE TOPS)



120003

4x



120004

4x



111212

4x



500001

4x


SINK INSTALLATION

1




Apply a continuous bead of quality sealant to the top surface (rim) of the sink.

2

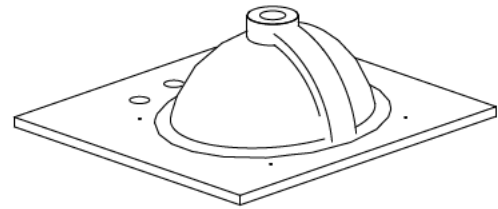


Turn the stone top upside down and place it on a clean, scratch resistant surface. Center the sink over the cutout.

3

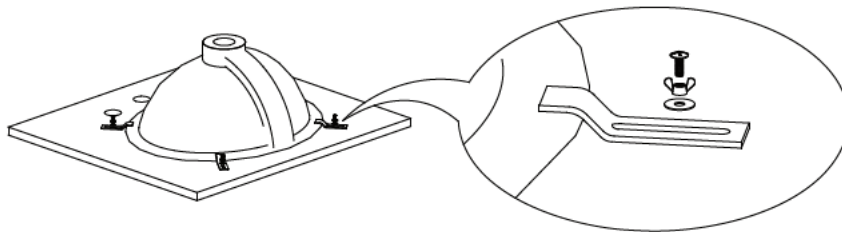


Secure the sink to the top using the mounting kit / hardware provided with the stone top, **HAND TIGHTEN ONLY.**

4

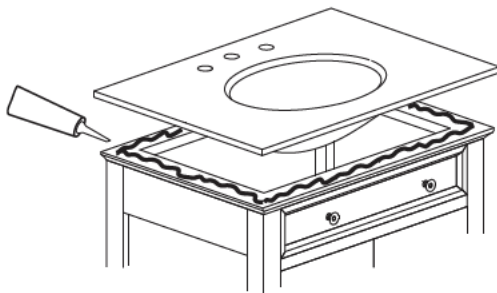


Apply bead of quality sealant evenly along the top

5

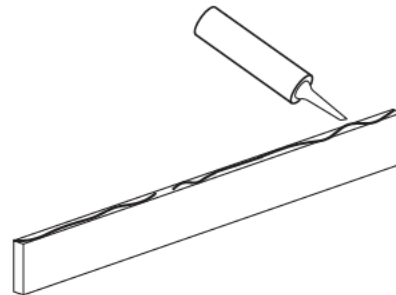

Apply silicone sealant evenly along the bottom of backsplash and wall.

6

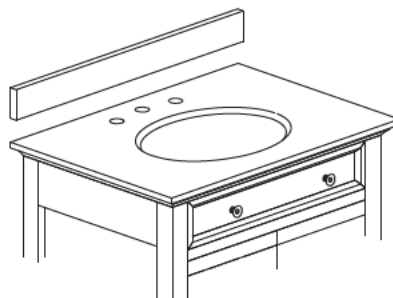

Finally, place the bottom side of back splash with sealant onto the countertop and check alignment of backsplash. Adjust the leg levels as needed

Installation


SUGGESTED TOOLS AND MATERIALS / OUTILS ET MATÉRIAUX PROPOSÉES



Tape Measure / Mètre à ruban


INSTALLATION INSTRUCTIONS / Les instructions d'installation

1

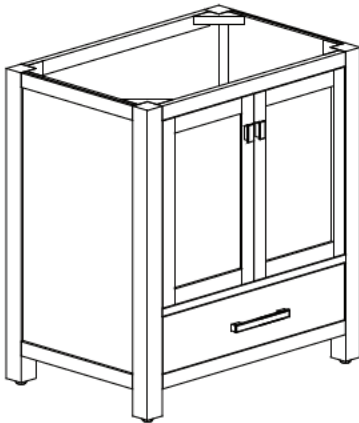

Remove from box and examine vanity for any defects or damage.

2

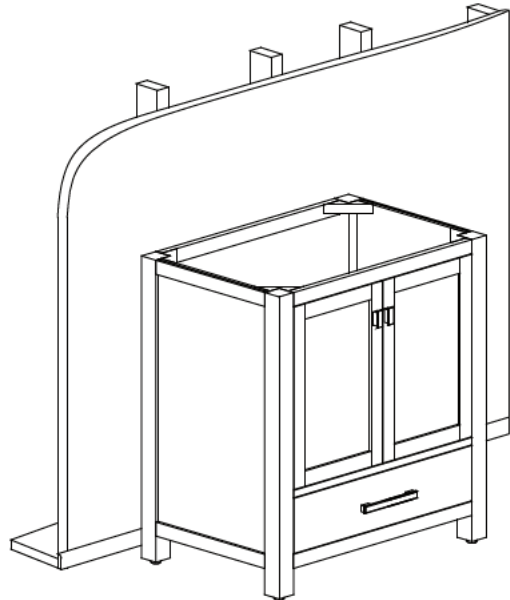

Carefully place against wall.

3

