






ASSEMBLY INSTRUCTIONS




Hardware:

A: Large Bolts  QTY: 4	B: Medium Bolts  QTY: 4	C: Small Bolts  QTY: 3	D: Wood Screws  QTY: 3	E: Locking Washers  QTY: 9
F: Washers  QTY: 9	G: Wood Caps  QTY: 2	H: Allen Key 	I: Glue 	

Parts:

J: Back Frame 	K: Seat Frame 	L: Seat Cushion 	M: Leg/Arm (2) 
---	---	--	--

NOTE: EACH BOLT EXCEPT FOR 2 SMALL BOLTS GETS 1 LOCK WASHER FOLLOWED BY 1 FLAT WASHER.




IMPORTANT NOTICE:


Place all wooden parts on a clean and smooth surface such as a rug or carpet to avoid scratching the parts. Check to be sure that you have all parts and hardware. Remove all wrapping materials, including staples & packing straps before you start to assemble. Keep all hardware parts and packaging out of reach of children. Two person assembly recommended.

ASSEMBLY INSTRUCTIONS:

STEP 1 : Attach Seat Frame(K) to Back Frame(J) using one small bolt(C) and 4 large bolts(A).

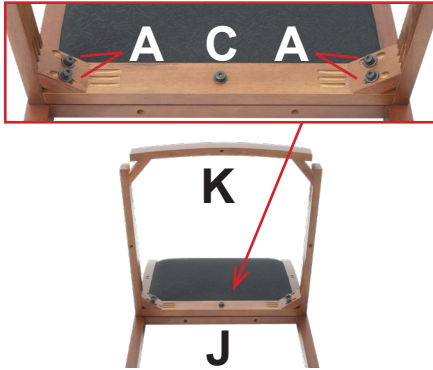


STEP 2 : Attach right Leg/Arm(M) to seat frame(K) using 2 medium bolts(B).

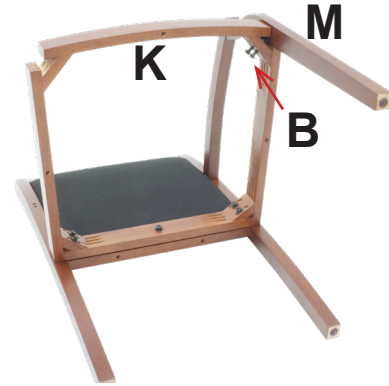


STEP 3 : Place seat cushion(L) at angle as shown below.



STEP 4a : Attach second Leg/Arm(M) to Seat Frame(K) using 2 medium bolts(B).

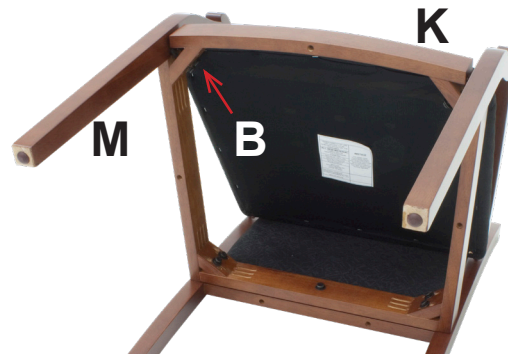


STEP 4b : Using downward force, slide seat cushion(L) into position, then attach using 3 wood screws(D).

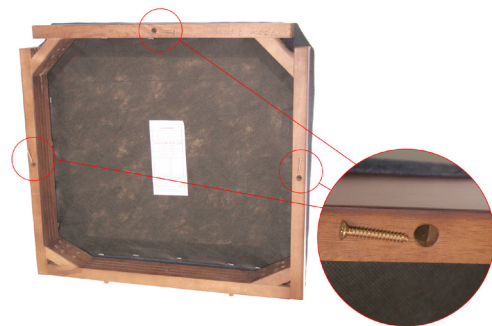

STEP 5a : Secure both Leg/Arms(M) to Back Frame(J) using one small bolt(C) each.

NOTE: These two small bolts DO NOT include flat washer & locking washer.

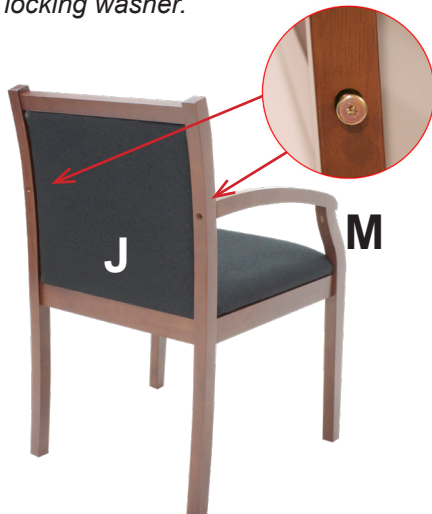

STEP 5b : Finish by plugging the holes with wood caps(G) using the glue(I).