

Ordering Information

Model No.	Item name	Dim	Lumens ² (lm)	Watts (w)	CCT ¹ (k)	Efficacy (lm/w)	CRI	Lifetime ³ (h)	Beam Angle	Base type	Voltage (v)	Cerification
FDK-DLB-F3-12-06-18-30K-D	DownLight	YES	1200	18	3000K	67	80	35000	/	E26	120	UL/ES
FDK-DLB-F3-12-06-18-40K-D	DownLight	YES	1200	18	4000K	67	80	35000	/	E26	120	UL/ES

1. CCT Range complies to ANSI C78.377-2008.

2. Thermally stable typical lumens (± 10%)

3. Rated life is based on 70% lumen maintenance, and engineering testing and probability analysis.

4. Equivalency based on the Energy Star® Integral LED Lamp Center Beam Intensity Benchmark Tool.

5. Energy Star® will be available in May, 2013.

Note: All Information consistent with IESNA LM-80-08 results and IESNA LM-79-08 testing completed by a qualified third party facility.

Note: All lamps meet Energy Star® Integral LED Lamp requirements, and will be submitted for testing.




Dimensions

Model	MOL	Diameter
FDK-DLB-F3-12-06-18-40K-D	2.64"	7.76"

Note: Lamp shape conforms to ANSI C78.21-2003.

Note: Designed to comply with RoHS Directive 2002/95/EC.

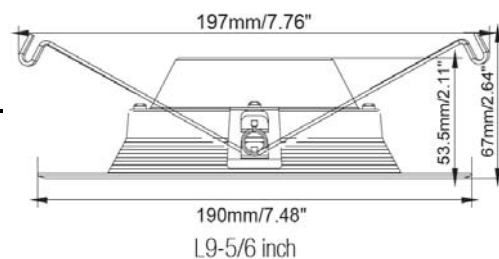

Energy Savings

Model No.	Equivalent	Energy Savings
FDK-DLB-F3-12-06-18-XXK-D	/	/



*Actual Equivalent Replacement, based on the Energy Star® Integral LED Lamp Center Beam Intensity Benchmark Tool.

Note: Energy Savings based on using one bulb for 25,000 hr rated life at 11¢/kWh. Does not include maintenance and replacement lamp savings.