
Installation & Assembly



DINING CHAIR (SET OF 2)


No.	Description		QTY
A	Back Cushion		2
B	Seat Cushion		2
C	Lower Leg		2
D	Upper Leg		2
E	Bolt M6 x 30 mm		2
F	Bolt M6 x 45 mm		8
G	Bolt M6 x 30 mm		8
H	Gasket		10
I	Allen Key		1

1

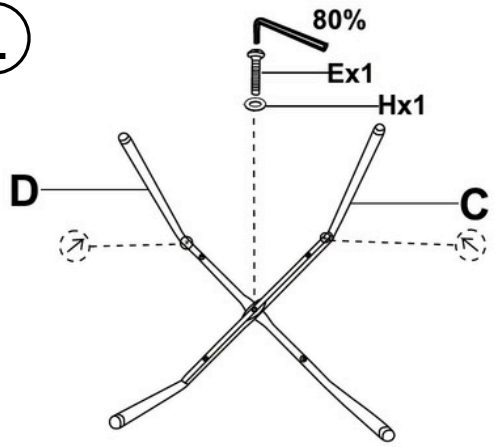


Cross the Lower Leg (C) and Upper Leg (D) as shown. Fit one Gasket (H) and one Bolt (E). Tighten to about 80% using the Allen Key (I).

2

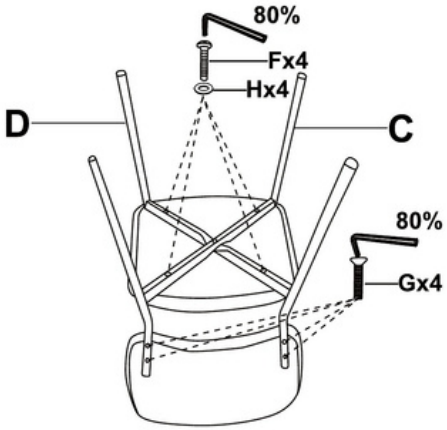


Place the Back Cushion (A) and Seat Cushion (B) upside down on a clean, soft surface. Attach the legs with four Bolts (F), four Gaskets (H), and four Bolts (G). Tighten to about 80%.

3

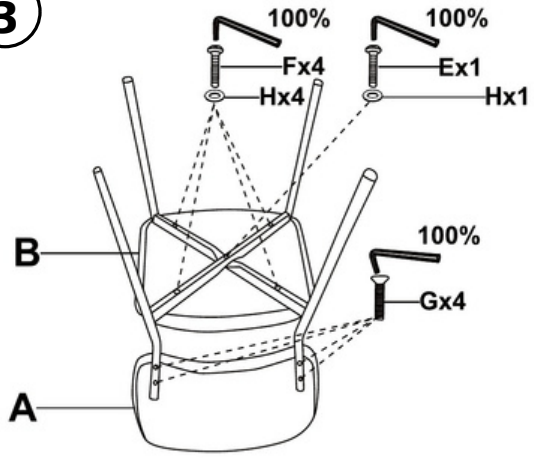

Check that all parts are correctly aligned. Using the Allen Key (I), fully tighten all Bolts (E), (F), and (G).

4

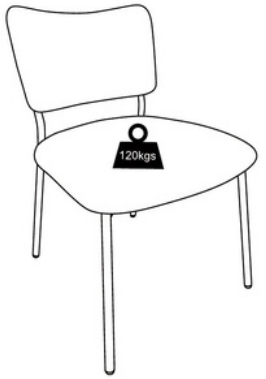

Turn the chair upright and place it on a level floor. Check that the chair is stable before use. Maximum load: 120 kg.

IMPORTANT: Do not stand on the chair. Check and retighten all bolts regularly. Repeat Steps 1-4 to assemble the second chair.