

# KUZCO LIGHTING

## LUMINAIRE PHOTOMETRIC REPORT

**Filename:** AT6610-BG - Mica

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** WALL MOUNT / ALL-TERRIOR

**Luminaire Cat:** AT6610-BG

**Lamp:** DC LED

**Lamp Cat:** N/A

**Ballast Desc:** INPUT: 120Vac 0.3A 50/60Hz OUTPUT: 18-40Vdc  
580mA 28W Max

**Ballast Cat:** NE024120058-2G

**Lamp Output:** Total luminaire Lumens: 1304.8

**Max Candela:** 268.5 at Horizontal: 180°, Vertical: 2.5°

**Input Wattage:** 24

**Luminous Opening:** Rectangle (L: 10", W: 5.51")

**Test Date:** 24 March 2022


**Test Lab:** KUZCO LIGHTING

**Photometry :** Type C

**CIE Class:** General Diffuse

**Cutoff Class:** Noncutoff

**Nema Type:** 7 X 7

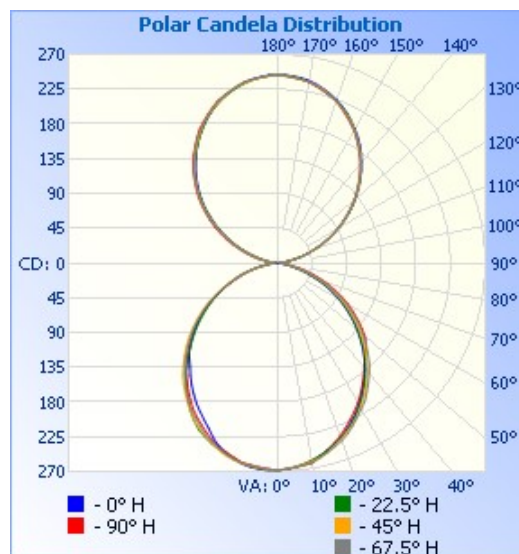


### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	201.5	15.4%
0-40	325.5	24.9%
0-60	558.6	42.8%
60-90	119.8	9.2%
70-100	52.4	4%
90-120	110.6	8.5%
0-90	678.5	52%
90-180	626.3	48%
0-180	1,304.8	100%

### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	25.2	1.9%	90-100	8.0	0.6%
10-20	71.1	5.4%	100-110	33.1	2.5%
20-30	105.2	8.1%	110-120	69.5	5.3%
30-40	124.0	9.5%	120-130	99.6	7.6%
40-50	125.1	9.6%	130-140	115.7	8.9%
50-60	108.0	8.3%	140-150	115.0	8.8%
60-70	75.4	5.8%	150-160	97.4	7.5%
70-80	35.9	2.8%	160-170	65.2	5%
80-90	8.5	0.7%	170-180	22.9	1.8%

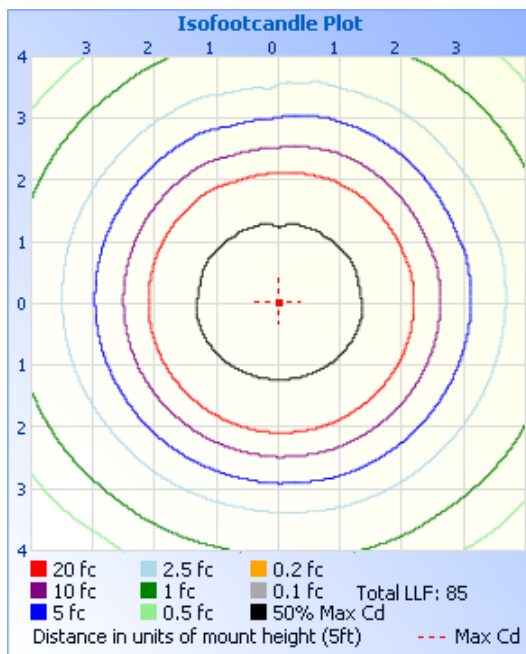

Photometrics Pro 1.3.29 copyright 2003-2023 by jSolutions, Inc.  
Reported data calculated from manufacturer's data file, based on IES recommended methods.