

Features

- 25+ artisan finishes including 10+ PVD finishes
- All brass construction
- Insulated to reduce heat to faucet
- Self-Closing handle
- Max flow rate: 1.0 gpm (3.8 L/min)
- Compatible with RO filter units
- Requires Hot Water Tank (9628SS) sold separately

Codes/Standards Applicable




Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC, & DOE
- Commonwealth of MA
- ADA compliant



9625Q-K30-SL shown

9625Q-K30-SL
9625Q-K30-KL
9625Q-K30-FL
9625Q-K30-TL

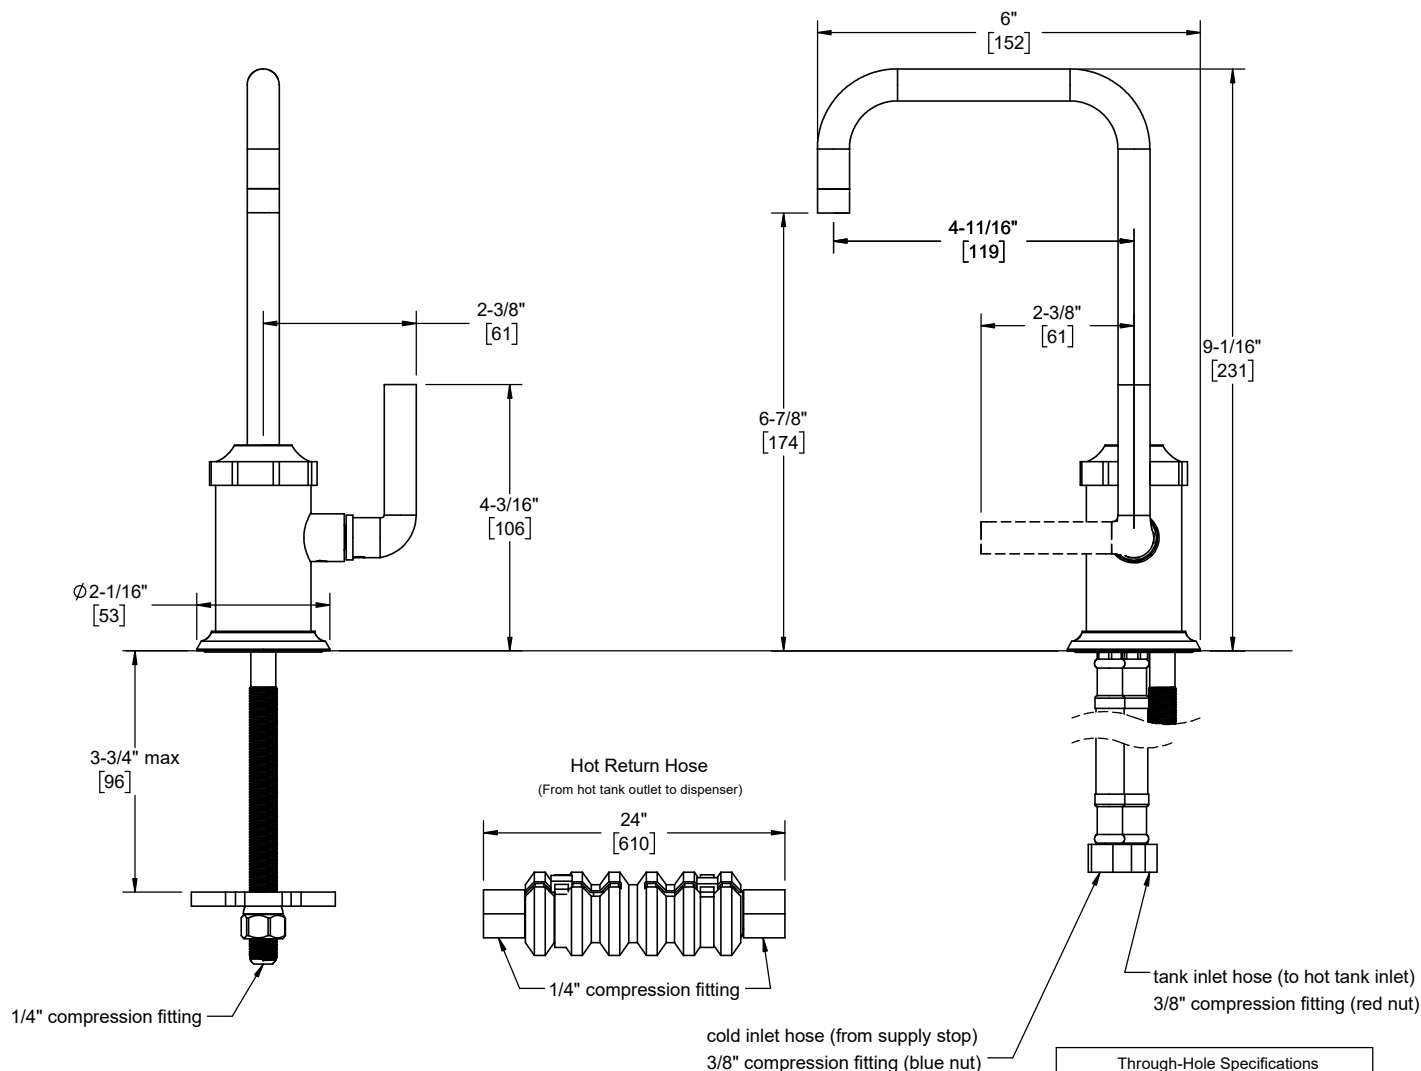

Specifications subject to change without notice

Dimensions are inches, rounded to 1/16"
 [Dimensions in brackets are mm, rounded to 1mm]