PLEASE DO NOT RETURN TO STORE

Please do not return this product to the retailer!
We are able to assist you in ANY way!

If you find that you have any trouble with assembly or missing or damaged parts please contact the seller.

User Manual
ASSEMBLY INSTRUCTION
LBZ-2143
Right corner from inside
62.9L*62.9W*29.5H Inch

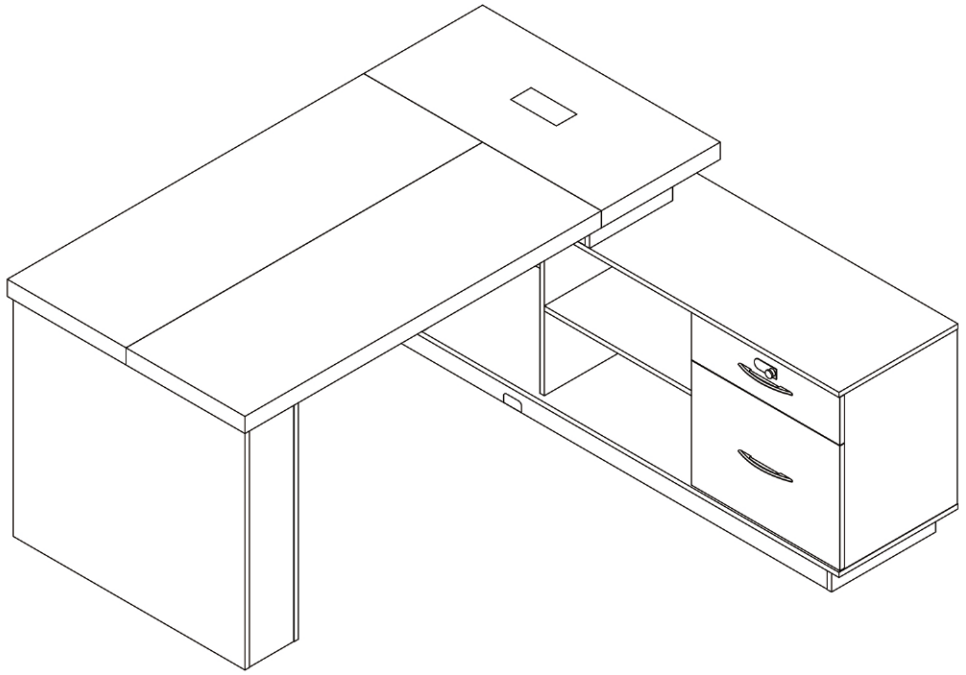

FRIENDLY REMINDER:

THIS DESK FEATURES A REVERSIBLE LEFT/RIGHT DESIGN. BEFORE ASSEMBLY, PLEASE THOROUGHLY READ THE INSTRUCTIONS TO CONFIRM YOUR DESIRED LAYOUT,

AND THEN FOLLOW THE CORRESPONDING GUIDANCE.

How to set the password of the combination lock?

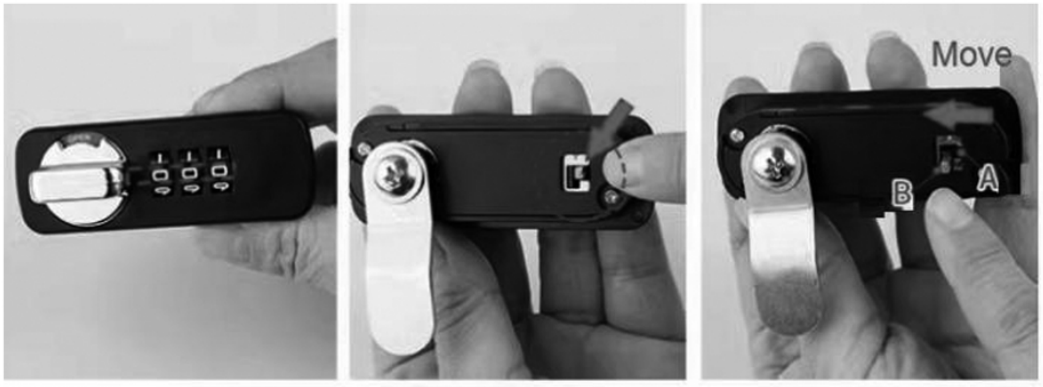

1. Initial password: "000"
2. With the lock open, find the lift lever from the back
3. Move the lever from point A to point B

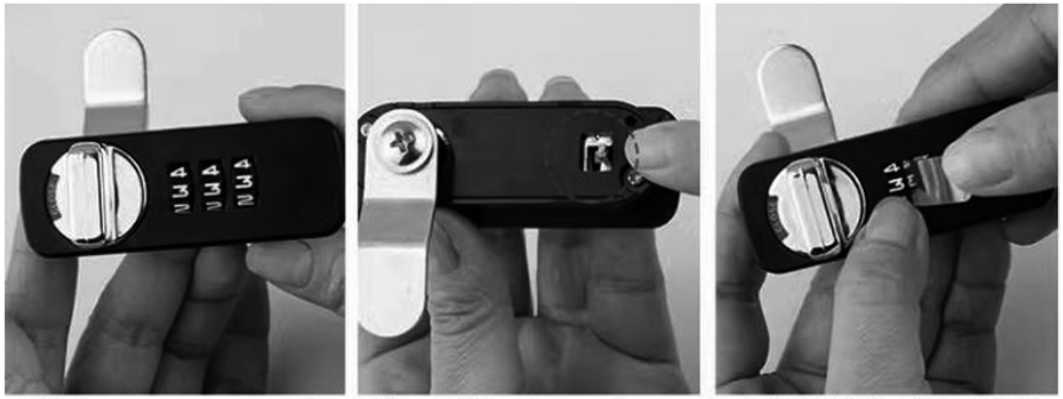

4. Set new password, for example, "333"
5. Reset the lever to the initial position
6. Complete Password Modification

How to separate drawer sliders?

1. The drawer slide I1 & I2 may be connected.
2. Carefully pull out slide part I2 and press the plastic clip/lever to unlock to fully separate the two parts of the runner.

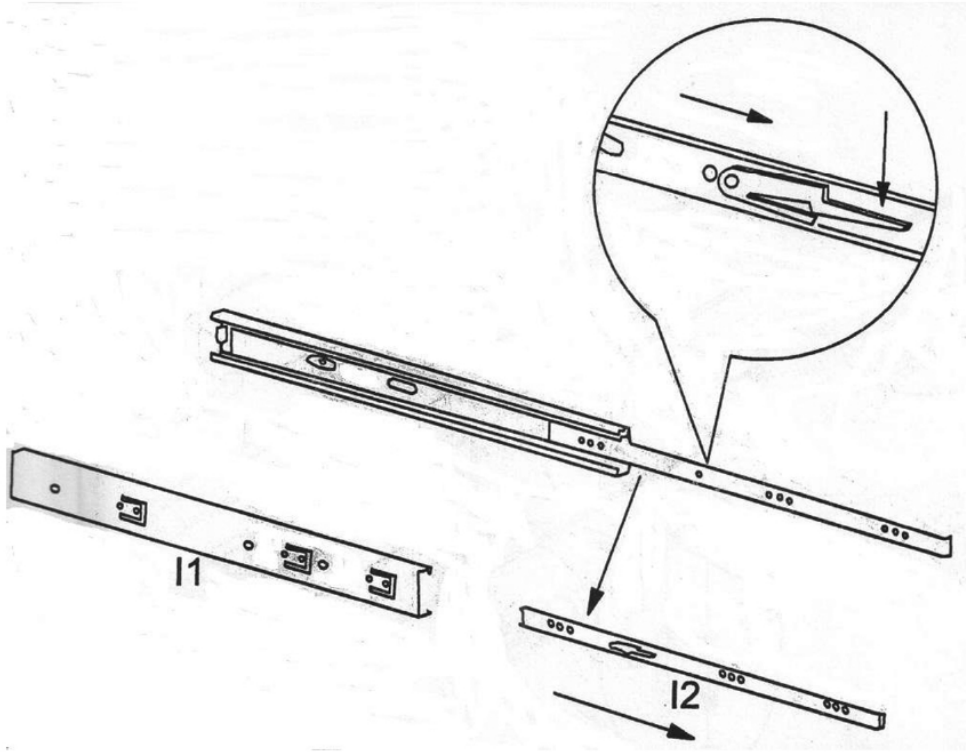

The installation drawing of the light strip, please refer to the light strip usage instruction card for details, thank you!

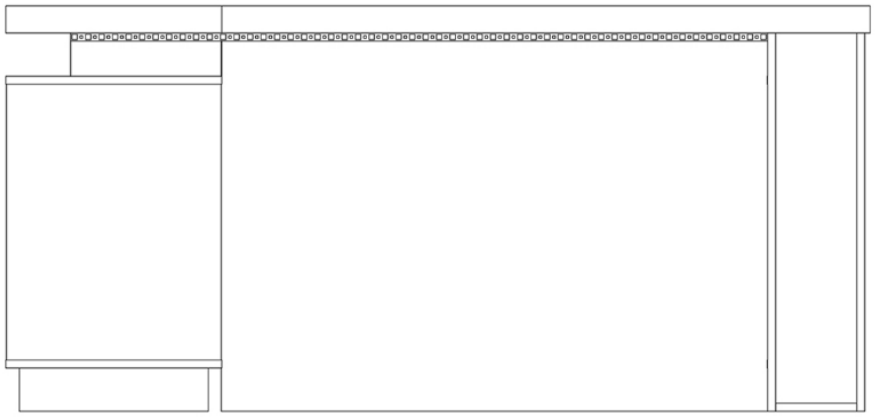

Scan the QR code to watch the product installation video

Parts List

NO.	Drawing	Dimension	QTY
1		1200*800*50mm	*1
2		400*800*50mm	*1
3		700*780*15mm	*1
4		700*780*15mm	*1
5		748*150*15mm	*1
6		685*150*15mm	*2
7		1011*500*15mm	*1
8		690*80*15mm	*1
9		690*80*15mm	*1
10		280*80*15mm	*2
11		1600*400*15mm	*1
12		510*380*15mm	*1
13		510*364*15mm	*1
14		510*364*15mm	*1
15		510*398*15mm	*1
16		1600*400*15mm	*1

NO.	Drawing	Dimension	QTY
17		1568*510*15mm	*1
18		510*180*15mm	*1
19		1470*80*15mm	*1
20		1470*80*15mm	*1
21		350*80*15mm	*2
22		318*80*15mm	*3
23		508*362*15mm	*1
24		500*140*15mm	*1
25		500*364*15mm	*1
26		350*96*15mm	*1
27		350*96*15mm	*1
28		415*96*15mm	*1
29		425*344*4mm	*2
30		1011*40*60mm	*1
31		335*160*15mm	*1
32		335*160*15mm	*1
33		445*280*15mm	*1

Hardware Fitting

NO.	Drawing	QTY
A		*102
B		*102
C	8*3mm	*2
D		*2
E	3.5*35mm	*8
F	3.5*14mm	*40
G		*2
H	4*18mm	*4
I	6*50mm	*2

NO.	Drawing	QTY
J	6*12mm	*4
K	4mm	*1
L		*1
M		*4
N	3.5*25mm	*12
O		*2
P		*4
Q	3.5*20mm	*16
R	335*34*12mm	*2

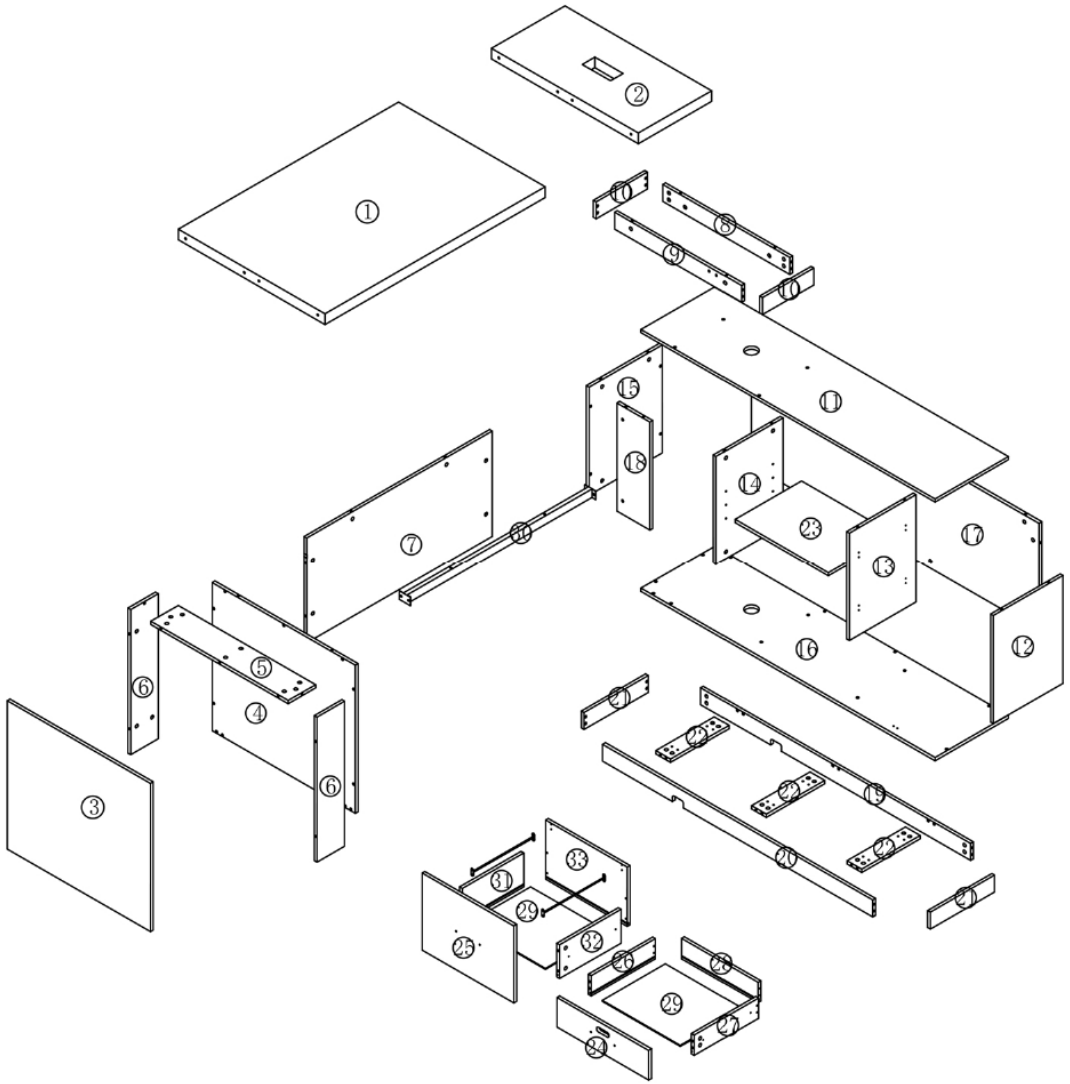

Cam Coupling Using Methods

Step1.
Connect the cam coupling A as directed in the assembly instructions using hand.

Step2.
Screw the cam coupling A as directed in the assembly instructions.



Step3.
Push the cam coupling A into the entry hole.



Step4.
Insert the cam coupling B as shown in the instructions.



Step5.
Turn the cam coupling B clockwise with a screwdriver



Step6.
Put on Beautycam.



Step7.
Finished.

You should feel a click when the camlock is locked in place.
The joint is mow secure.