

Enclume



Classic Décor Oval Rack DR1 KD

Enclume Décor racks are the ultimate in quality, design, strength and function. Congratulations for owning one of the finest storage racks made.

WARNING:
READ ALL OF THE INSTRUCTIONS
BEFORE ASSEMBLING AND USING YOUR RACK.


Enclosed you will find everything needed for the assembly and use of your pot rack. Two people make assembly and installation easier. The parts and hardware included are

Components included:

- 1 - Hammered Steel Oval
- 1 - Cross Bar
- 4 - Curved Brackets
- 1 - Grid

Hardware included:

- 2 - Ceiling Screw Hooks
- 2 - Chain approx. 6"
- 2 - 'S' Hooks 2"
- 12 - Pot Hooks
- 4 - Grid Brackets - EGB
- 1 - 1/8" Hex Key
- 2 - #10 x 3/8" Button Head Screws
- 2 - #10 x 5/8" Button Head Screws
- Toggle Kit

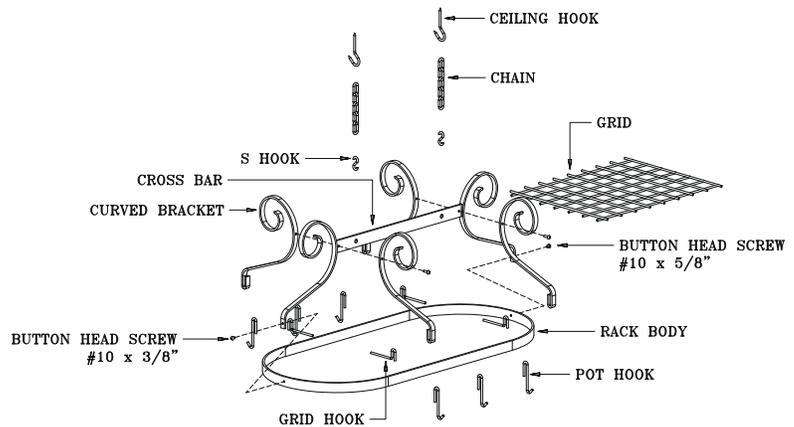


ASSEMBLY AND INSTALLATION INSTRUCTIONS

- 1) Lay rack body (oval) on firm surface. Protect surface with corrugated box if necessary.
- 2) Using two #10 x 3/8" button head screws, attach cross bar to both ends of the oval. (The cross bar will fit to the outside of the rack body). Do not fully tighten screws at this time.
- 3) The curved brackets are pre-assembled as a set, each set will have one curved bracket with a "tapped" (threaded hole) and one with a drilled (no threads). Remove the #10 x 5/8" button head from one set. Slipping each curved bracket (end with the tight "U" shape bend) onto the rack body one on each side of the rack, using the #10 x 5/8 button head screw, attach the two curved brackets and the cross bar together. (Please use the hole closest to the end of the cross bar, the larger of the two holes must be used to hang fixture).
- 4) Repeat process for other set of curved brackets. Securely tighten all screws at this time.
- 5) Your rack can be carefully anchored into solid wood of the ceiling joist or beams. Carefully measure the area where the rack is to be hung and install the ceiling screw hooks (approximately 14" apart). If you are mounting in plasterboard, use the Toggle provided and follow the directions in the Toggle kit.
- 6) Place the four grid brackets over the sides of the rack on the inside of each of the four curved brackets with the straight end of the brackets facing towards the inside of the rack. Next place the grid on top of the grid brackets. (See note next page).

- 7) Insert the "S" hooks into each of the remaining holes in the cross bar and the other end through one end of the chain. Carefully lift your rack into place and attach the other end of the chain onto the ceiling screw hooks.
- 8) Hang your heavier item on the straight portion of the rack body or the center of the grid area.
- 9) All of our hammered steel racks are finished with an industrial wax designed to give years of protection to the rack. Cleaning is done easily with a damp cloth. Dry thoroughly after cleaning. If a touch up is ever needed we recommend a "Pledge" like wax product.

Note: Grid as shown in drawings is upside down for illustration purposes. Please turn grid over so crossbars that extend the width of the grid are facing down. This will help to keep grid from sliding out of position when rack is in use.

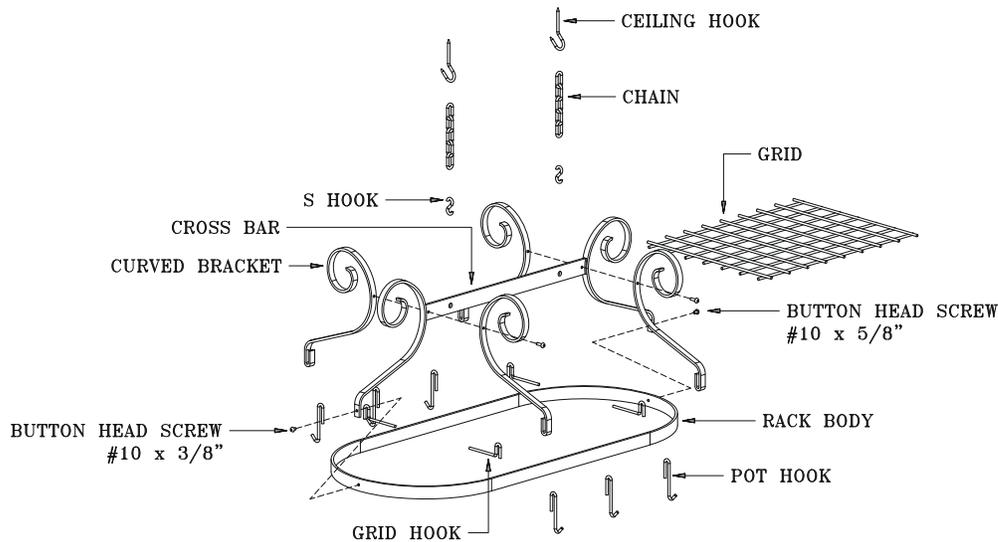

WARNING

It is important that your rack is assembled correctly. If the unit is assembled or used incorrectly, it could become unstable and collapse, possibly causing injury.

Limited Warranty: This product is warranted to be free of material defects for a period of five years from the date of purchase. Customer's exclusive remedy shall be the repair or replacement of the defective product and shall be subject to the following conditions: (1) notice of any defect is received by Enclume within the warranty period and (2) customer returns the defective product to Enclume Design Products, Inc., 24 Colwell St., Port Hadlock, WA 98339, *postage prepaid* within 20 days following a return authorization number (which may be obtained by telephoning the number at the bottom of this instructions) being provided to the customer by Enclume. There are no other warranties, expressed or implied. **THERE ARE NO WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. ENCLUME SPECIFICALLY DISCLAIMS ANY AND ALL INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE PURCHASE OR USE OF ENCLUME'S PRODUCTS.**



If you need help, please call 1-877-ENCLUME
Enclume Design Products, Inc.
 24 Colwell Street, Port Hadlock, WA. 98339
 Phone 360-385-6100 • Fax 360-385-6156
www.enclume.com