































*Assembly and Operation Guide*

*Outdoor  
Bistro Set*

# Check List

	PARTS LIST	DESCRIPTION	QTY
A		CHAIR BACK	2
B		CHAIR SEAT	2
C		LEFT LEG	2
D		RIGHT LEG	2
E		LEG CONNECTOR	2
F		1/4" X 15 MM BOLT	8
G		1/4" X 40 MM BOLT	8
H		Ø6.5 X 1.0 MM WASHER	32
I		1/4" NUT	16
J		BOLT COVER	16
K		NUT COVER	8
L		HEX WRENCH	1
M		HEX BOLT DRIVER	1
		FOOT CAP-1 FACTORY ASSEMBLY	
		FOOT CAP-2 FACTORY ASSEMBLY	

Step 1: Remove all protective materials and set parts on a flat, non-abrasive surface. Identify parts packed in carton against the parts list. If you are missing any parts or are unsure how to proceed with assembly. Do not attempt assembly if any parts are missing or damaged.

	PARTS LIST
A	
B	
C	
D	
E	
F	
G	
H	
I	
J	
K	
L	
M	
	
	

Step 2: Place the chair seat on a solid flat surface. Position the chair back as shown in Figure 1 so that the holes in the chair back align with the holes in the chair seat. Insert 1/4"x15 mm bolts through the holes of the chair back and then through the holes in the chair seat. Add a 1/4" nut to the end of each bolt. Hand tighten 3-4 turns only.

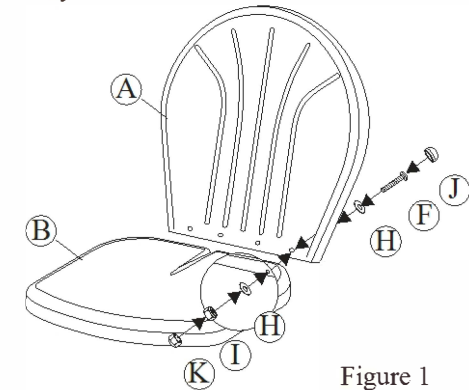


Figure 1

Step 3: Insert the ends of the chair leg connector into the ends of the left chair leg and right chair leg as shown in Figure 2.
















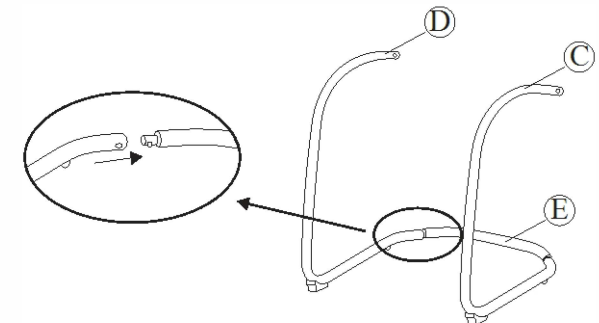


Figure 2

# Check List

PARTS LIST	
A	
B	
C	
D	
E	
F	
G	
H	
I	
J	
K	
L	
M	
	
	

Step 4: While one person holds the chair seat/chair back assembly as shown in Figure 3, have another person attach to the chair leg assembly. Add a 6.5x1.0mm washer to a bolt and insert through aligned holes in the rear arm and chair back. Insert the bolts in a straight path. Add a 1/4" nut to the end of bolt as shown in Figure 3. Repeat on opposite side. Repeat again for holes on left and right side of chair seat.












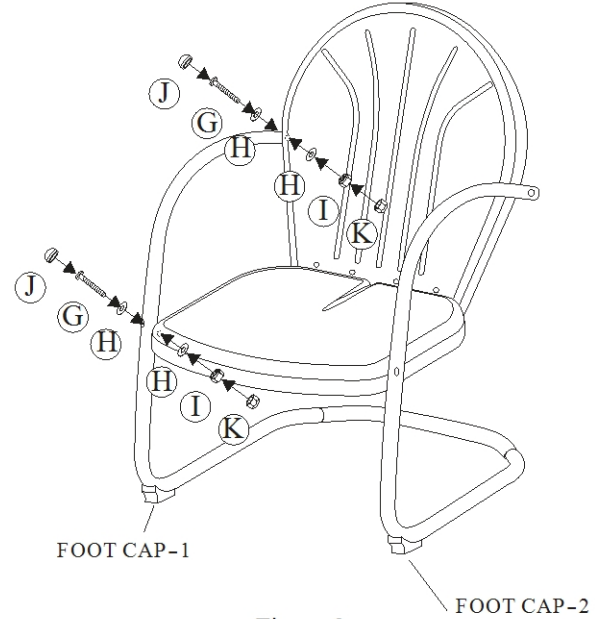











Figure 3


Step 5: After making any necessary adjustments to the alignment of the parts, use the hex bolt driver and hex wrench to tighten all nuts and bolts. Repeat until all bolts are tight them. Never over tight them. It might cause striped bolts. Cover all nuts and bolts with covers. If the chair is not sitting properly, repeat Step 4.







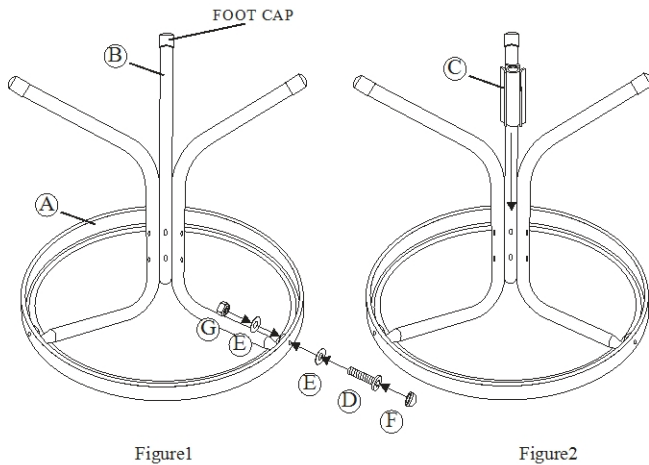



	<u>PARTSLIST</u>	<u>DESCRIPTION</u>	<u>ORDERPART#</u>	<u>QTY</u>
A		TABLETOP	ST0431	1
B		TABLELEG	ST0432	3
C		TABLELEG CONNECTOR	ST0433	1
D		1/4"X15MMBOLT	HW0034	3
E		6.5X1.0MM WASHER	HW0103	9
F		BOLTCOVER	HW0105	9
G		1/4"NUT	HW0014	3
H		1/4"X30MMBOLT	HW0574	6
I		HEXBOLTDRIVER	HW0006	1
J		HEXWRENCH	HW0009	1

<u>PARTSLIST</u>	
A	
B	
C	
D	
E	
F	
G	
H	
I	
J	


Step 1: Remove all protective materials and set parts on a flat, nonabrasive surface. Identify parts packed in carton against the parts list. If you are missing any parts or are unsure how to proceed with assembly, Do not attempt assembly if any parts are missing or damaged.

Step 2: Place table top up side down on a flat, non-abrasive surface. Attach table leg to table top using bolt and washer as shown in Figure 1. Add 1/4" nut to the end of bolt. Tighten a few revolutions only. Do not tighten completely at this time as some adjustments may be necessary to the alignment of the table legs. Repeat for remaining two legs.



<u>PARTSLIST</u>	
A	
B	
C	
D	
E	
F	
G	
H	
I	
J	

Step 3: Insert table leg connector in the center of the three legs as shown in Figure 2. Secure by inserting two 1/4" x 30 mm bolt through the two holes in the center of the leg and into the leg connector as shown in Figure 3. Tighten a few revolutions only. Do not tighten completely. Repeat for remaining two legs.

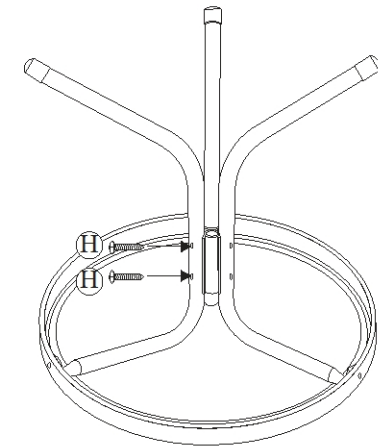

Step 4: Make any adjustments to the parts to ensure they are properly aligned. At this time tighten all nuts and bolts using hex bolt driver and hex wrench. Tighten each bolt connection a few revolutions at a time, rotating between bolt connections until all nuts and bolts are completely tightened. DO NOT OVER TIGHTEN. Cover bolts with bolt covers. Turn table into the upright position. YOUR TABLE IS NOW READY FOR USE.