






FSC
www.fsc.org
100%
Wood from well-managed forests
FSC® C183324

Power Left Chair
Assembly Manual

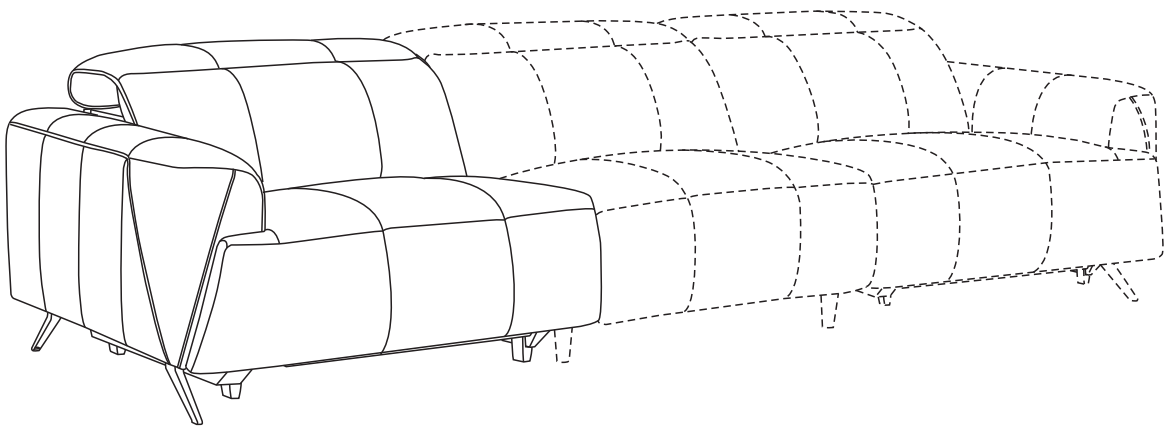


CAUTION THIS ASSEMBLY MANUAL CONTAINS IMPORTANT SAFETY INFORMATION. PLEASE READ AND KEEP FOR FUTURE REFERENCE.

Parts


A  Backrest	**B**  Power Left Chair	**C**  Metal Leg x 2	**D**  8 * 35 mm screw x 8
E  Plastic Leg x 4	**F**  6 * 25mm screw x 4	**G**  Hex Key x 1	**H**  Power Cord

Before you begin


Locate both the All-in-One Kit (with hardware and tools) and the Power Cord (H) at the bottom of the Power Left Chair Seat.

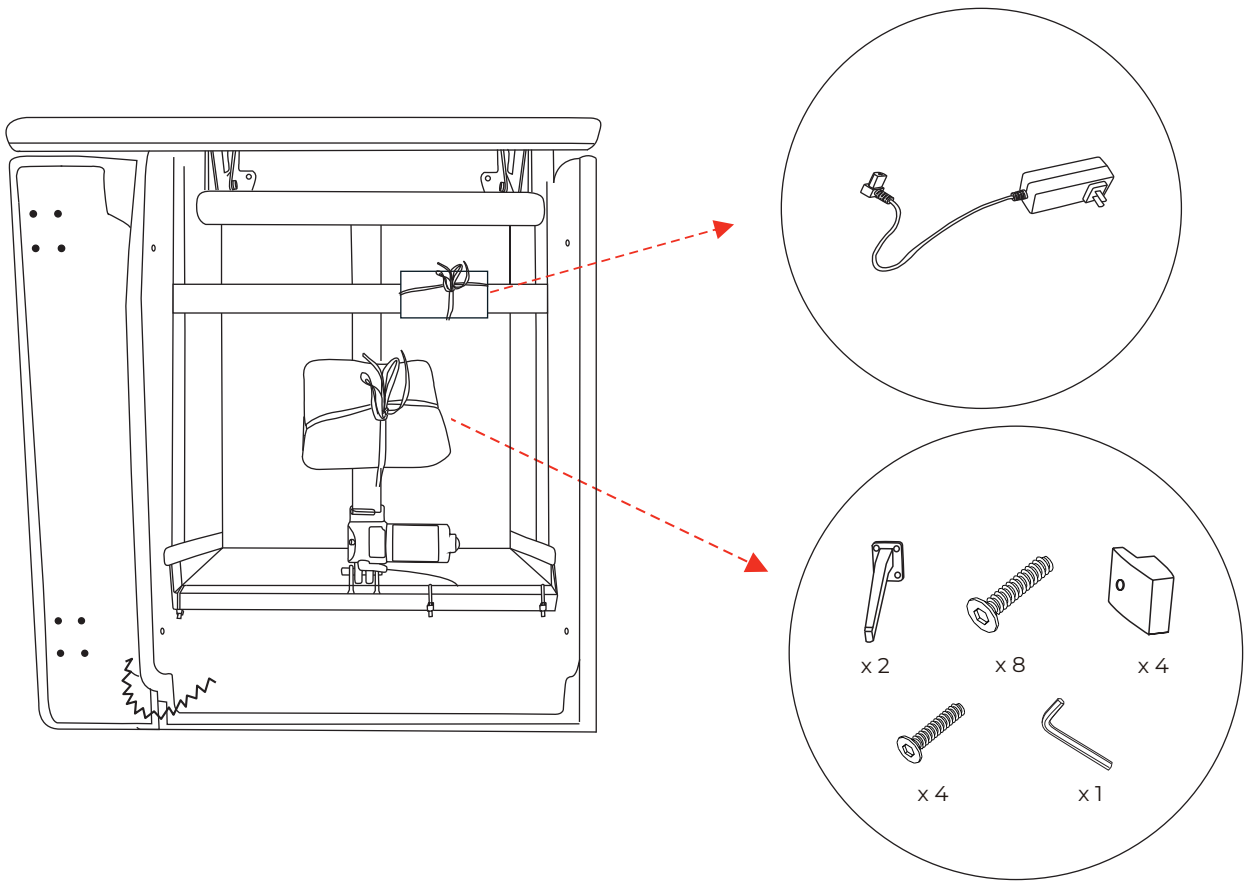


Step 1: Tip over the Power Left Chair, remove 2 Metal Legs (C) and 4 Hexagon Socket Screws (D). Align them with the holes as shown in the diagram, then use the Hex Key to tighten the screws. Follow the same procedure to remove 4 Plastic Legs (E) and 8 Hexagon Socket Screws (F), then install them as illustrated.

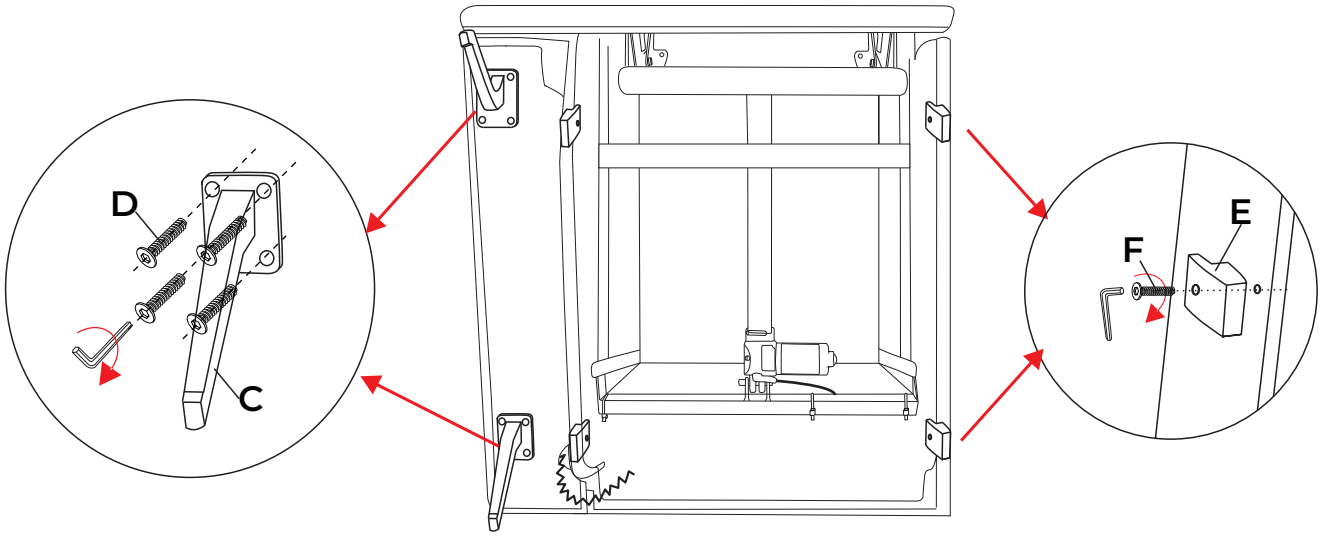

Step 2: As shown in the figure, pull the headrest hinge mechanisms until they are fully upright. Then attach the backrest Velcro firmly to the back frame and zip up the zipper.

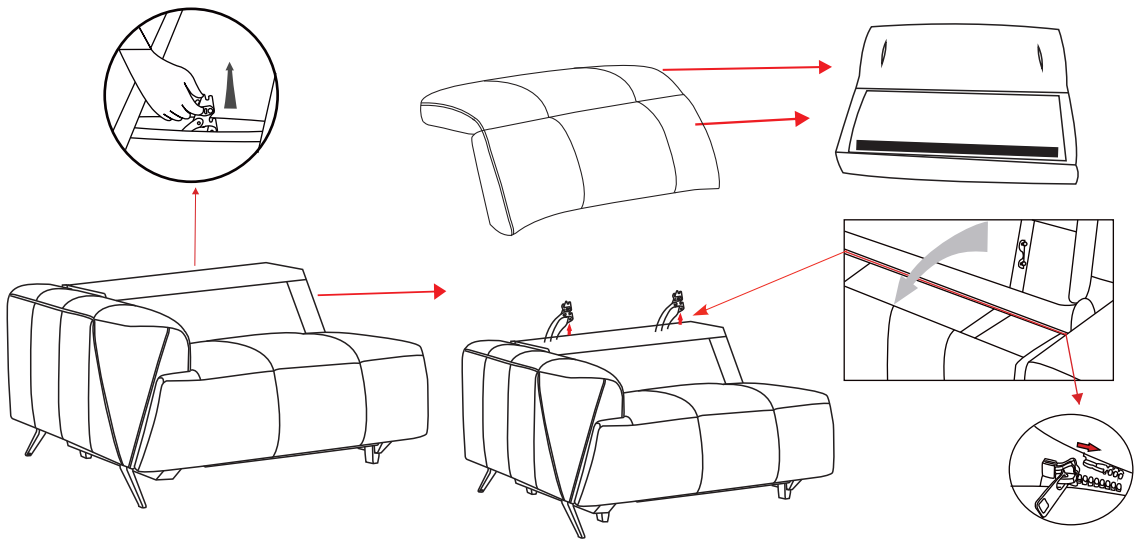


Step 3: Snap the metal part of the headrest into the raised hinge, ensuring it is firmly locked in place, as illustrated in the figure. Then fasten the hook-and-loop strips (Velcro®-type) located underneath the back cushion to the corresponding strips on the seat base.

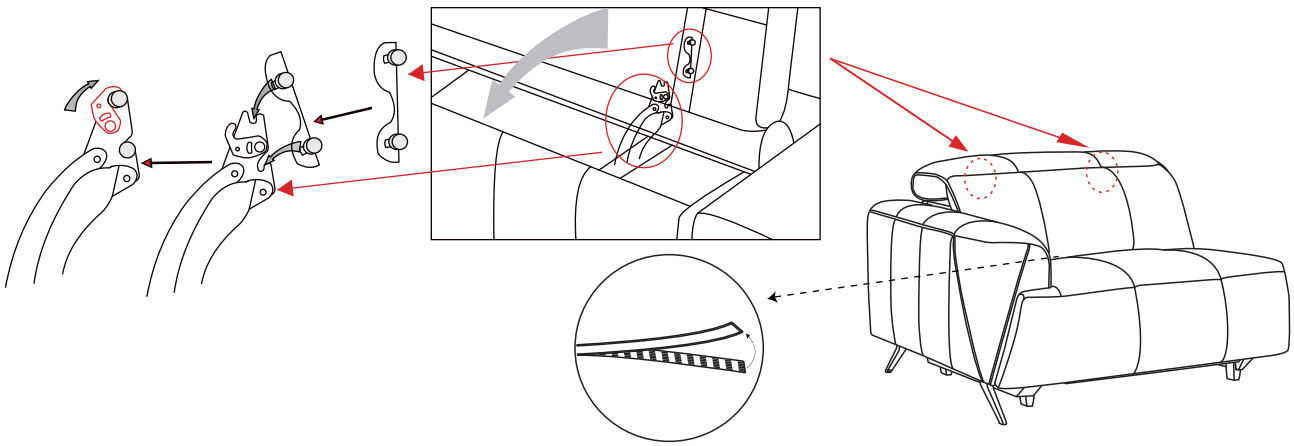


How to Connect

Step 1: Lift the side of the sofa with the protruding side brackets, insert it into the side slots on the opposite side, to lock them into place.

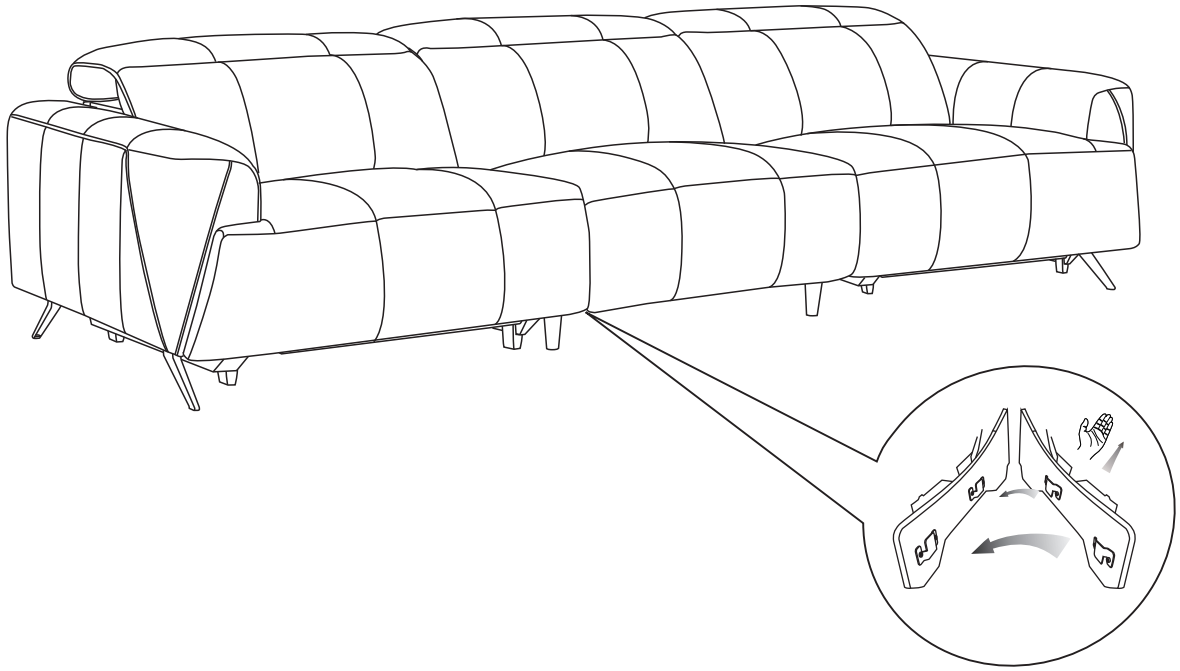

Step 2: For Power Armless Chair, connect the wires piece by piece.

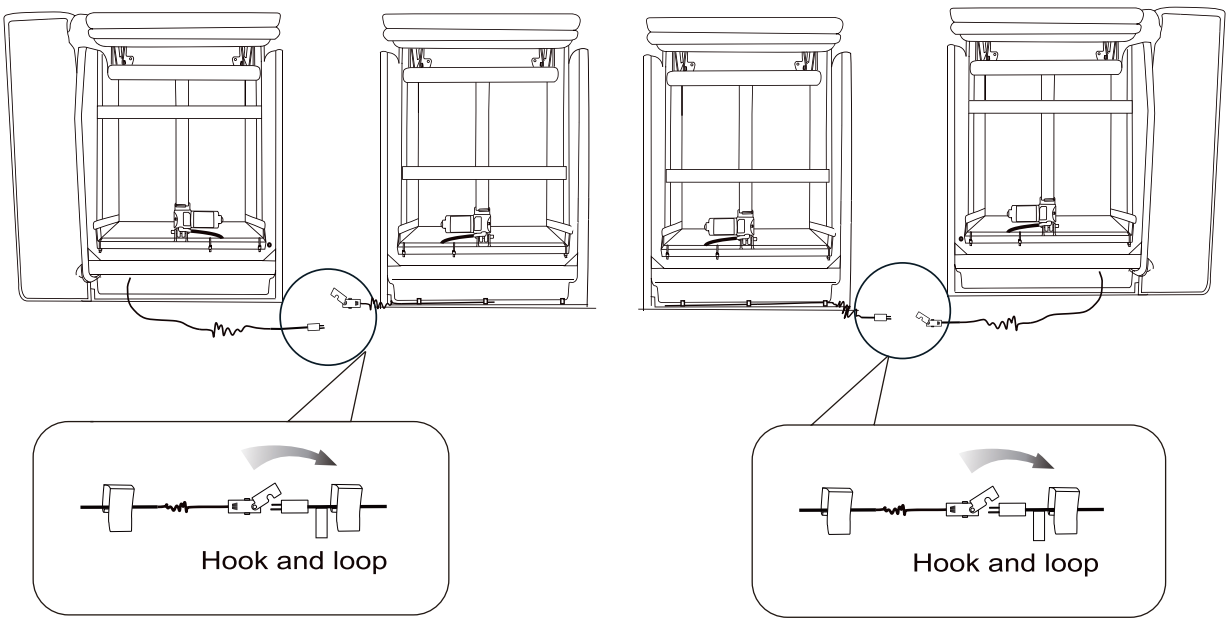

Step 3: Plug the power cord of either the left or right power armchair into the power outlet.
Note: After all the connections are made, the green LED will be lit up.

