
ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

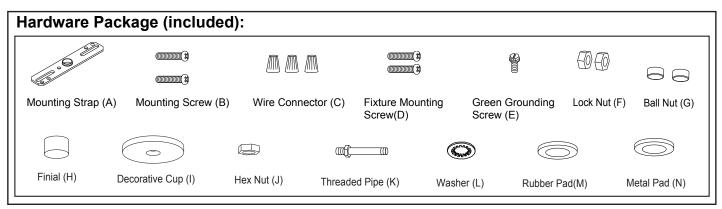


Installation Steps

Turn off the power at fuse or circuit box

- Attach two fixture mounting screws to the mounting strap, and then secure it with two lock nuts. Adjust the length of the fixture mounting screws if necessary.
- 2. Attach the mounting strap to the outlet box using two mounting screws.
- 3. Pull out the source wires from the outlet box. Make wire connections using wire connectors as follows:
 - ---Connect the black wire from the fixture to the black wire from the power source.
 - ---Connect the white wire from the fixture to the white wire from the power source.
 - ---Attach the fixture grounding wire to the mounting strap with the green grounding screw, and then connect it to the house grounding wire with a wire connector.

Carefully put the wires back into the outlet box.


- 4. Attach the canopy to the mounting strap by inserting the fixture mounting screws, and then secure it with two ball nuts.
- 5. Screw the threaded pipe into the coupling, then secure it with a washer and hex nut.
 - Note: Depth of threaded pipe may need to be adjusted to properly fit glass shade, decorative cup and finial.
- 6. Install 2 x 60W max medium base bulbs (not included) to the sockets.
- 7. Slip the glass shade through the threaded pipe and upward the ceiling pan. Then tighten them with a rubber pad, metal pad and hex nut. Caution: Do not over tighten, breakage of glass shade could be occurred.

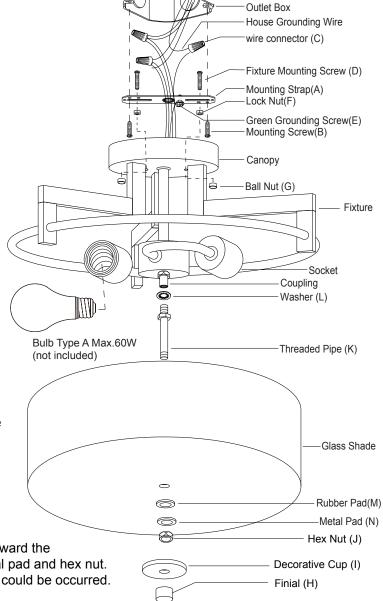


8. Slip the decorative cup up through the threaded pipe, secure it with a finial.

Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.

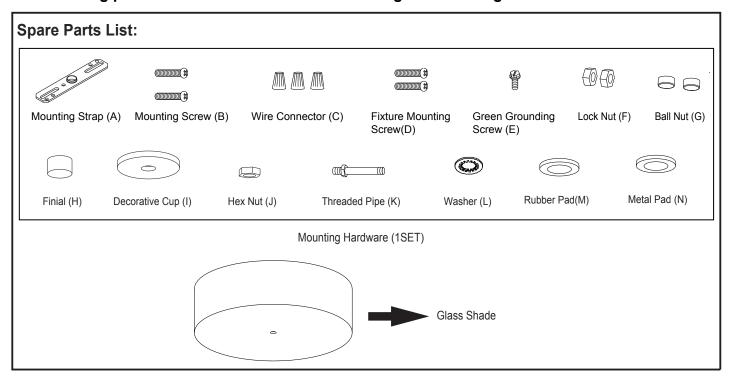

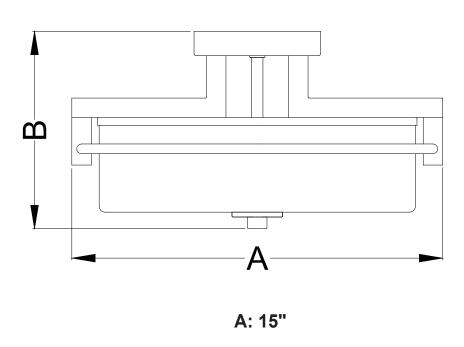

B:8"