


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.


NOTES:

1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.
3. Always switch off the electricity supply and allow to cool for 10 minutes before changing the light bulbs.
4. Min. 90°C supply conductors. consult a qualified electrician to ensure correct branch circuit conductor.

LED CEILING LIGHT

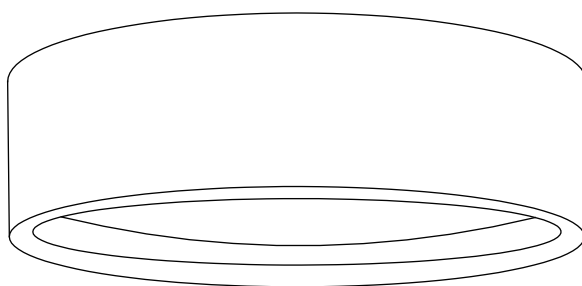


TOOLS REQUIRED




Flathead
Screwdriver



Phillips
Screwdriver



Ladder




Wire Strippers



Pliers



Electrical
Tape



Wire Cutters



Safety Glasses

PREPARATION



Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product. When the lamp is not installed finish, please don't throw away the package, so as not to leave the parts in the package.

PART LIST AND HARDWARE LIST

PIECE	DESCRIPTION	QUANTITY
A	Mounting bracket	1
B	Green ground screw	1
C	Outlet box screw	2
D	Wire nut	3
E	Fixture body	1
F	Shade	1

INSTALLATION

1. Attach the mounting bracket(A) to the junction box with outlet box screw (C) then fix it.
2. Attach the supply circuit ground wire (green or bare copper wire) to the fixture ground wire, black to (black) and white to (white).
3. Align the holes of the rear plate of fixture body (E) with the locking screws and turn clockwise locking the plate in to place. Tighten the locking screws, being careful not to overtighten the screws.
4. Finally by turning the light shade(F) clockwise until securely fastened.

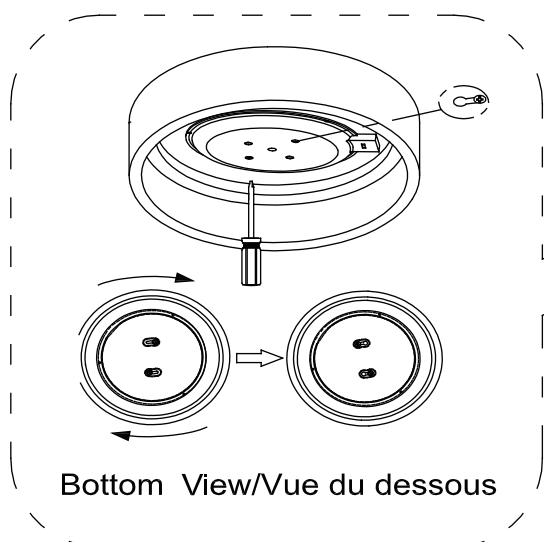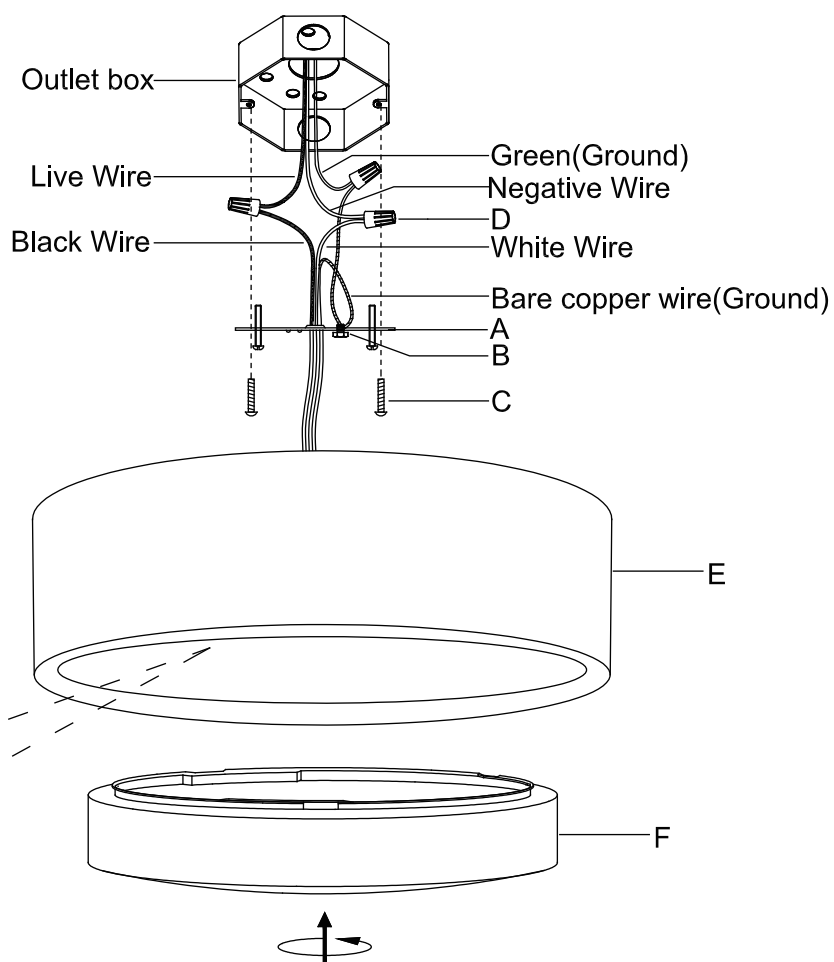

Thanks for using this product !