


CEILING FAN WITH LIGHT



INSTALLATION MANUAL

TOOLS REQUIRED

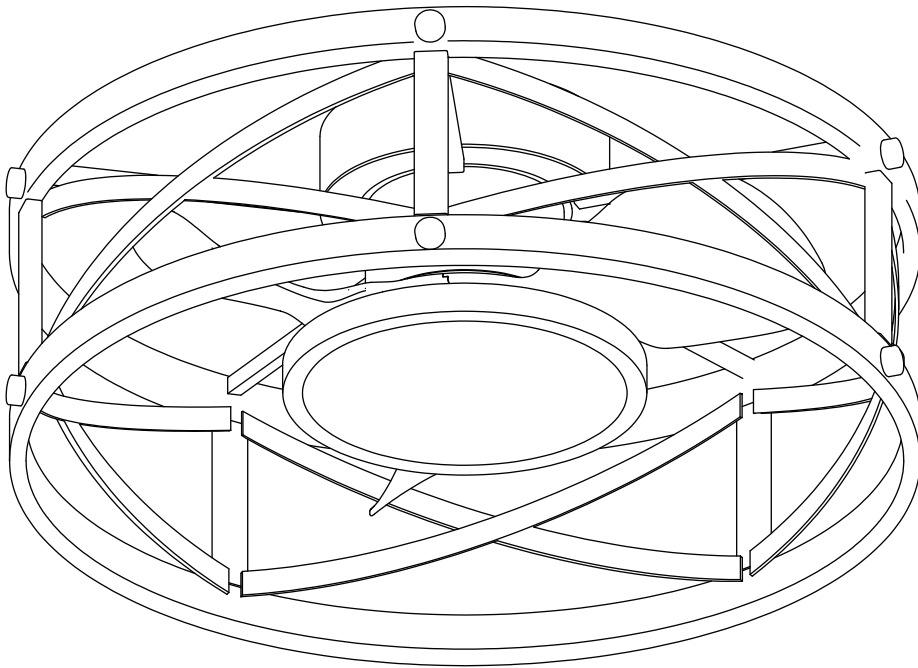


Ladder



Pliers




Wire Strippers



Screwdrivers

01

PACKING LIST

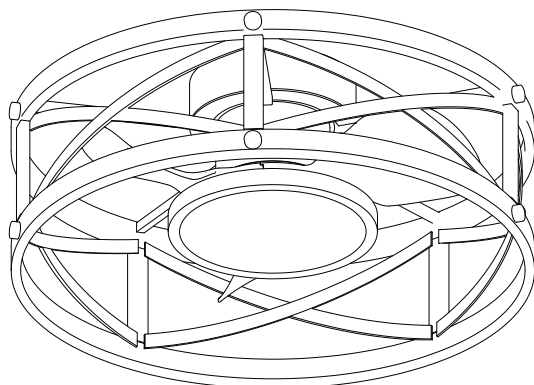

← **A** Fan Assembly × 1



← **B** Remote Control × 1




← **C** Remote Holder × 1

02

INSTALLATION KIT

AA

1×

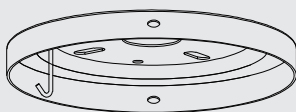

Mounting Bracket

BB

3×



Wire Nut

CC


2×



Outlet Box Screw & Washer

DD

4×



Canopy Screw

EE

1×



"S" hook

FF

1×



Gloves


NOTE:

1. Some extra hardware may be included. The quantity listed above is the number required for installation.
2. Parts "AA"/"DD" have been installed with Fan Assembly (A). They need to be disassembled before installation.

1. Separating Mounting Bracket


Step 1. Loosen and remove the Canopy Screws (DD) from the round holes, and loosen the Canopy Screws (DD) in the "L" holes but do not remove them.

Step 2. Take out the Mounting Bracket (AA) from the Fan Assembly (A).

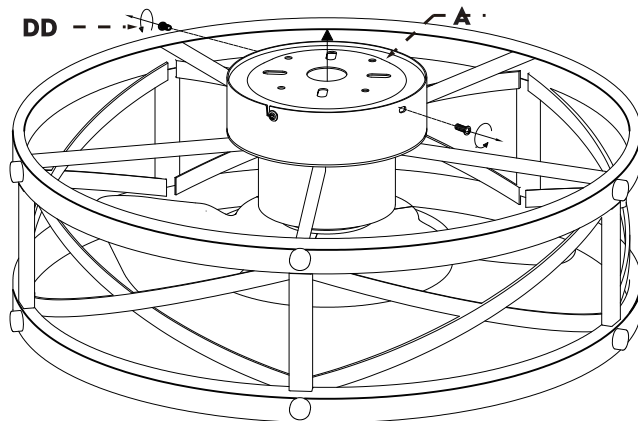


2. Installing the Mounting Bracket

Take off the screws from the outlet box, and secure the Mounting Bracket (AA) onto the box with the screws taken off or Outlet Box Screw & Washer (CC).

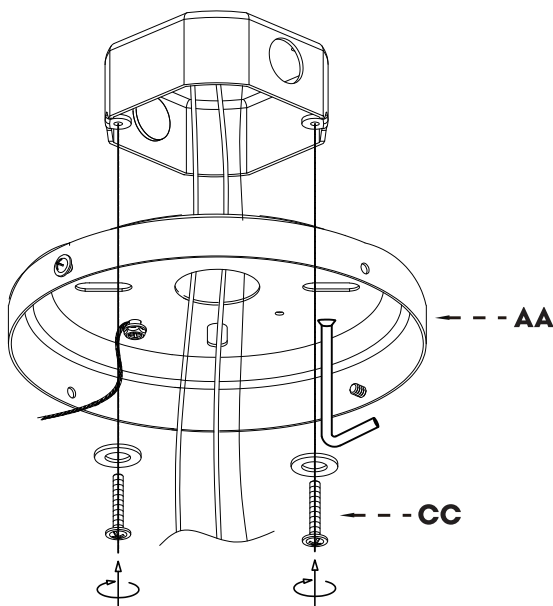

3. Hanging

Hang the Fan Assembly (A) onto the Mounting Bracket (AA) with "S" hook (EE).

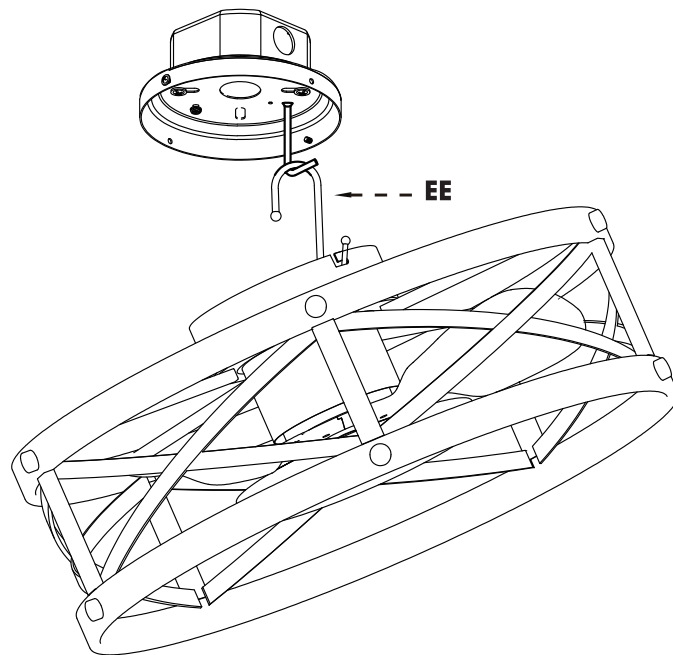


4. Wiring

Step 1: Wrap the ground wire from the outlet box around the Ground Screw on the Mounting Bracket (AA), and then connect the ground wire from the fixture to the ground wire from the outlet box.


Step 2: Connect the wires with the Wire Nut (BB) from the fixture to the house supply wires, neutral (white) to neutral wire, and hot (black) to hot wire.

Step 3: Spread apart the wires so that the hot wires are on one side of the outlet box and the neutral wires are on the other.

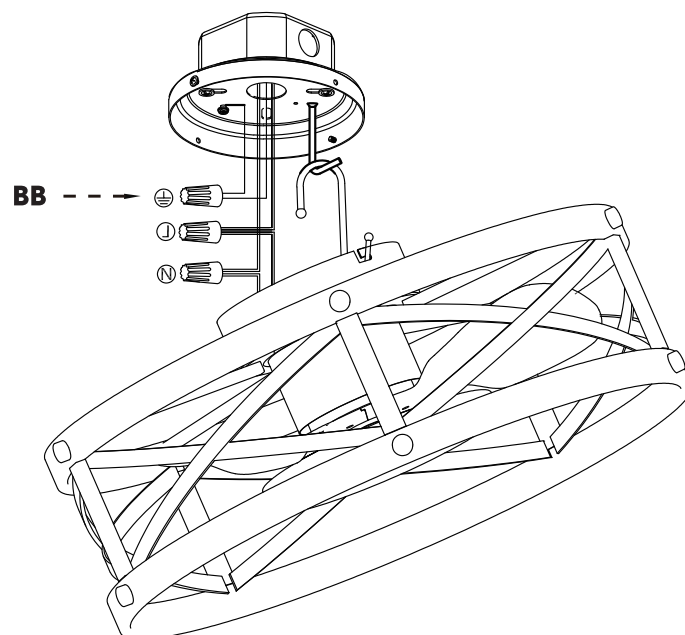

5. Taking out the "S" Hook



Take away the "S" hook (EE).

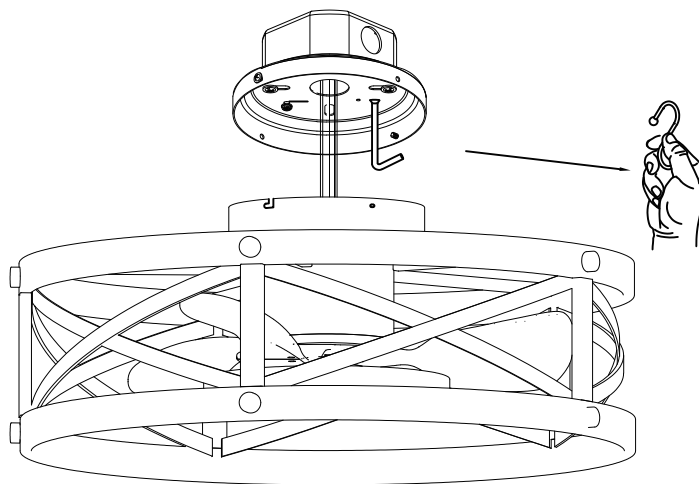

6. Attaching the Fan Assembly


Step 1: Align the "L" slots from the Fan Assembly (A) to the Canopy Screws (AA) on the mounting bracket (AA).

Step 2: Rotate the canopy (B) to lock it onto the Mounting Bracket (A). Tighten the Canopy Screws (AA).

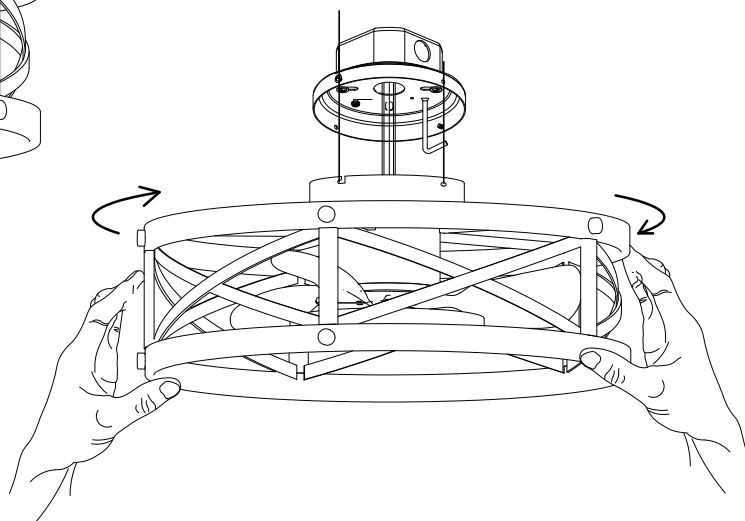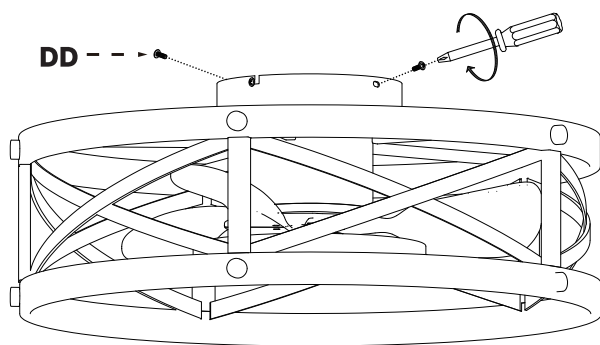

04

REMOTE CONTROL INSTRUCTIONS


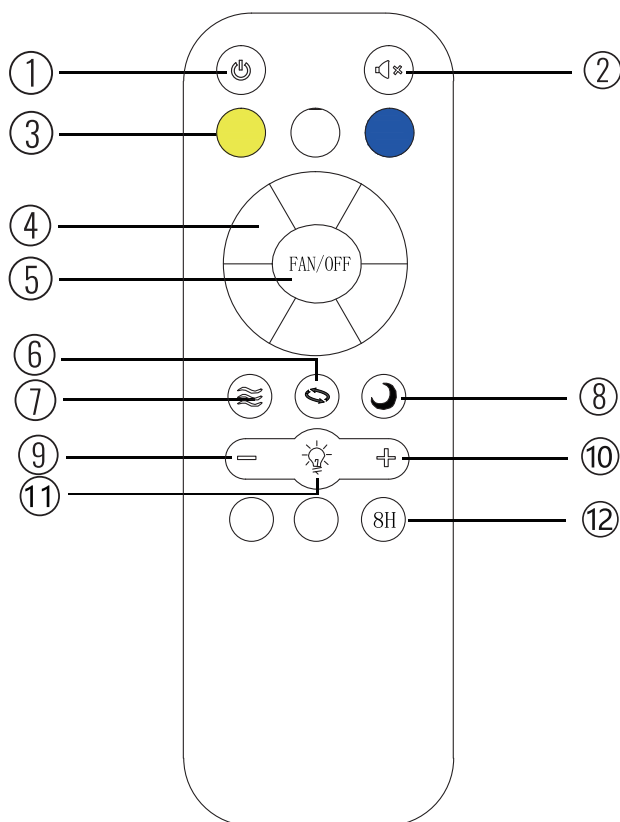


- ①: Turn off power.
- ②: Turn on/off the mute mode.
- ③: Adjust the light color temperature.
- ④: Turn on the fan on 1/2/3/4/5/6 speed.
- ⑤: Turn off the fan.
- ⑥: Fan moves forwards or reversely.
- ⑦: Natural wind, fan speed will change automatically with this function.
- ⑧: Night mode, lights will be dimmed when press this button.
- ⑨ ⑩: Adjust the brightness of the light.
- ⑪: Turn on/off the light.
- ⑫: 2H/4H/8H for timing the fan.

REMOTE SIGNAL PAIRING:

If the remote control loses signal of the fan, press and hold the button ⑤ at the very beginning after it's turned on from wall switch. After the fan light flashes or beeps, it's done.

APP CONTROL INSTRUCTIONS

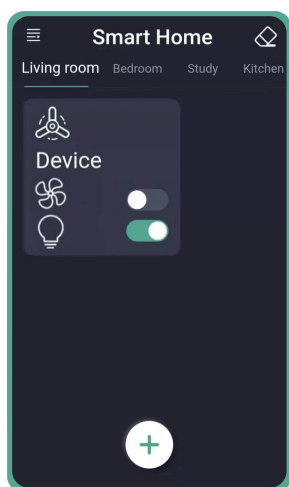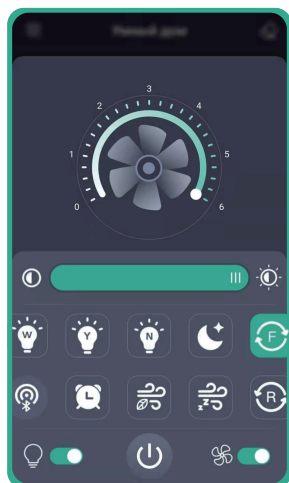

-  Pair button. Click it within 5 seconds after the fan is powered on from wall switch. After the fan flashes or beeps, it has been successfully paired with the phone, it can be controlled through it.
-  Slide to change the fan speed.
-  Slide to change the brightness of the light.
-  Quick switch for "White" light color. (Not supported)
-  Quick switch for "Yellow" light color. (Not supported)
-  Quick switch for "Natural" light color. (Not supported)
-  Night mode: Dim the lights. (Not supported)
-  Fan moves forward.
-  Fan moves reversely.
-  Change the direction of the wind. (Not supported)
-  Timing the fan.
-  Natural wind: The fan speed will change automatically when you use this function.
-  Sleeping wind. (Not supported)
-  Turn on/off the light.
-  Turn on/off the fan.
-  Unpairing: Click the unpair button within 5 seconds after turning on the fan. Once the fan flashes or beeps, it has been successfully unpaired from your phone.