
Manual Book


Ceiling Fan with Lights

Model No.: XIN-0301BL-20X

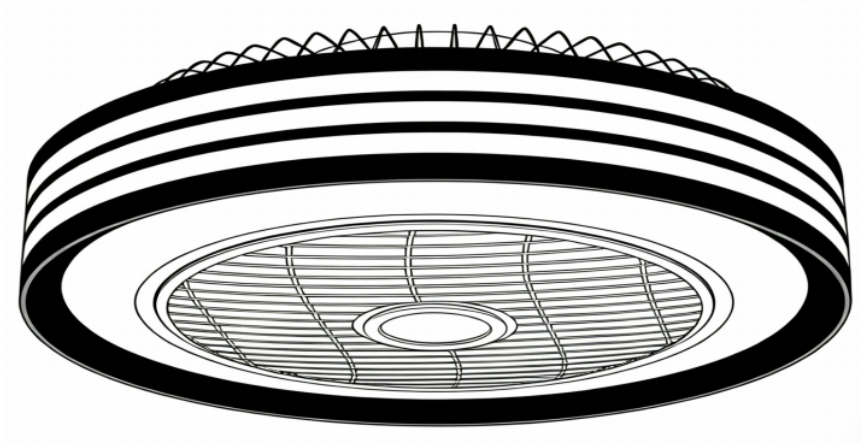

APP Control Applicable

Contact Information

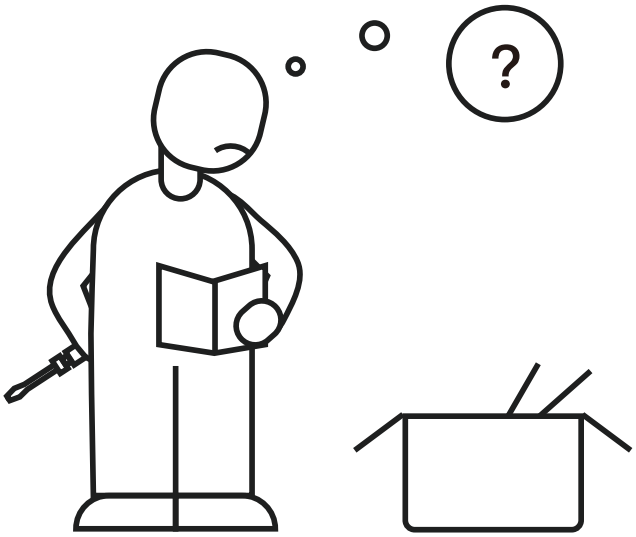

Please contact us with following information:


1. A screenshot of your order page, including the product picture, name, and order ID number.
2. Details of the problem, including pictures or a short video if possible.

Email: lightingcustomercare@gmail.com


Scan for Online Installation Video

Note: Product in the video may be different from this one.

Packing List




A

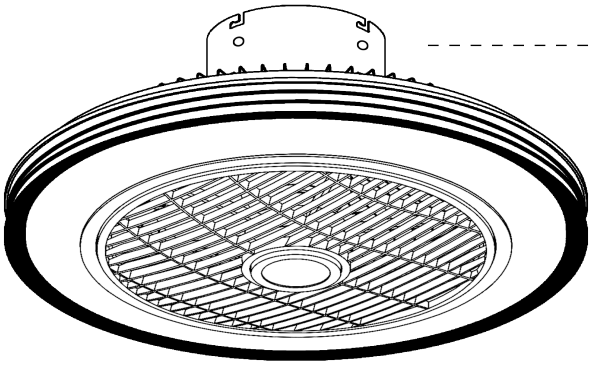


B

C



D




E

Part	Description	Quantity
A	Bracket	1
B	Canopy	1
C	Fan Assembly	1


Part	Description	Quantity
D	Remote Control	1
E	Remote Holder	1

Note: Some parts may be assembled together in the package.

Installation kit




AA




BB




CC



DD



EE



FF

Part	Description	Quantity
AA	Canopy Screw (assembled)	4
BB	Wire nut	3
CC	Pair of Gloves	1
DD	“S” Hook	1
EE	Wood Screw (opitional)	4
FF	Machine Screw & Washer for Outlet Box (spares)	2

Note: For your convenience, you may receive extra hardware.

Safety Rules

1. Be sure the power to the wires you are working on is disconnected, either the fuse is removed or the circuit breaker is turned off. Turning the power off using the light switch is not sufficient to prevent electrical shock.
2. A qualified licensed electrician is required for the installation.
3. The outlet box and support structure must be securely mounted and capable of reliably /supporting a minimum of 50 pounds. Use only UL (cUL for Canadian Installation) listed mounting boxes marked "FOR FAN SUPPORT".
4. The fan must be mounted with a minimum of 7 feet clearance from the trailing edge of the blades to the floor.
5. Do not operate reversing switch while fan blades are in motion (if applicable). Fan must be turned off and blades stopped before reversing blade direction.
6. Do not place any objects in the path of the blades.
7. To avoid personal injury or damage to the fan and other items, be cautious when working around or cleaning the fan.
8. Do not use water or detergents when cleaning the fan or fan blades. A dry dust cloth or lightly dampened soft cloth will be suitable for the cleaning.
9. After marking electrical connections, spliced conductors should be turned upward and pushed carefully up into outlet box. The wires should be spread apart with the grounded conductor on one side of the outlet box.
10. Electrical diagrams are reference only, different fan light may have different light shade and bulbs.
11. Use only our replacement parts. This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to part 15 of the FCC Rules. These limits are to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions may cause harmful interference to radio communications.

Warning:


To reduce the risk of personal injury, use only the two steel screws and washers provided with the outlet box for mounting to the outlet box. Most outlet boxes commonly used for the support of lighting fixtures are not acceptable for fan support and need to be replaced, consult a qualified electrician if in doubt.

To reduce the risk of fire, electric shock or person injury, mount fan to outlet box marked "acceptable for fan support".

To reduce the risk of personal injury, do not bend the blade brackets (also referred to as flanges) during assembly or after installation. Do not insert objects in the path of the blades.

Installation Preparation


Tools You Need

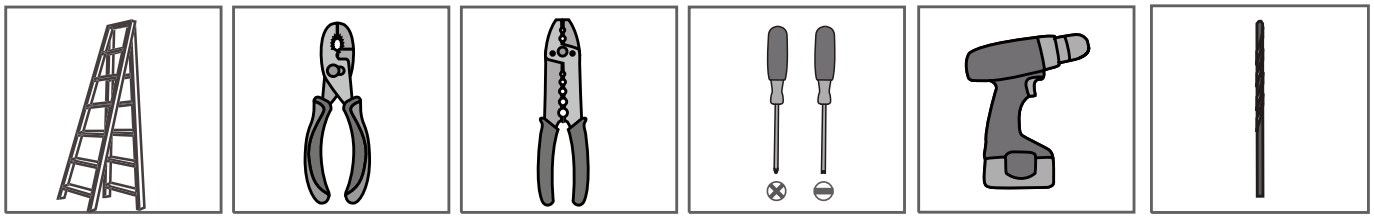

☑ Ladder ☑ Pliers ☑ Wire Strippers ☑ Screwdrivers ☐ Power Drill (optional) ☐ Drill Bit (optional)

If mounting to a support structure, you will also need the optional tools.

What to Expect with Your Installation

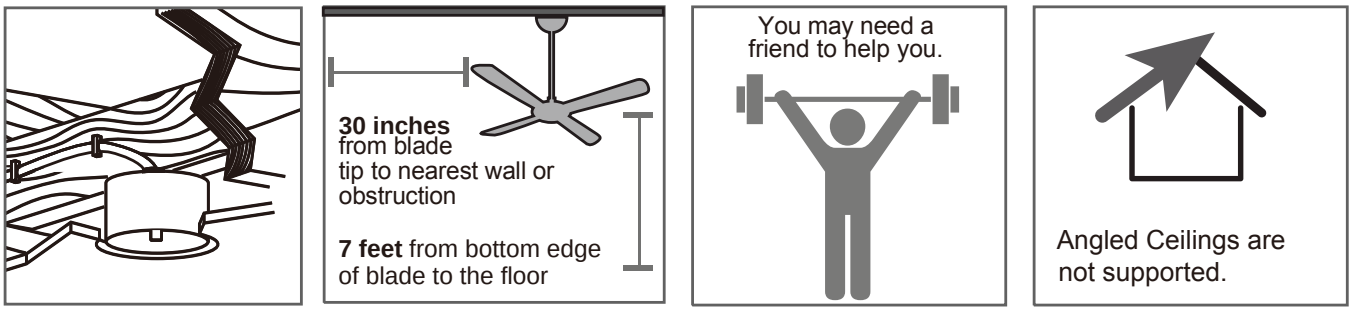


☑ Must be able to secure the fan to building structure or fan-rated outlet box

☑ Assess location

☑ Check box to see fan weight

☒ Angled Ceiling not supported

Installation Step 1 (Mount the Bracket)

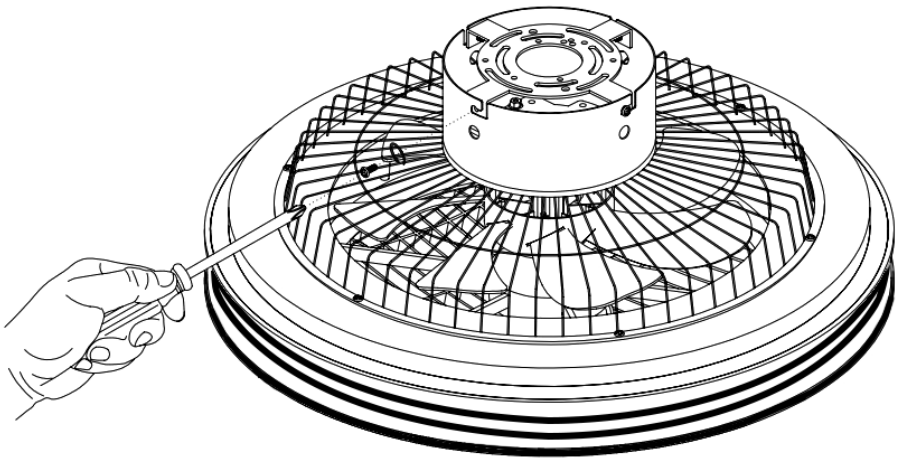


Loosen screws from the canopy (don't take off), take out the bracket from the canopy.

With Outlet Box: Fix the bracket onto the outlet box with screws from the outlet box, fix the cross bar of the bracket onto to the ceiling with 4 wood screws (optional).


Without Outlet Box: Fix the cross bar onto the solid wood structure with 4 wood screws.

Option 1

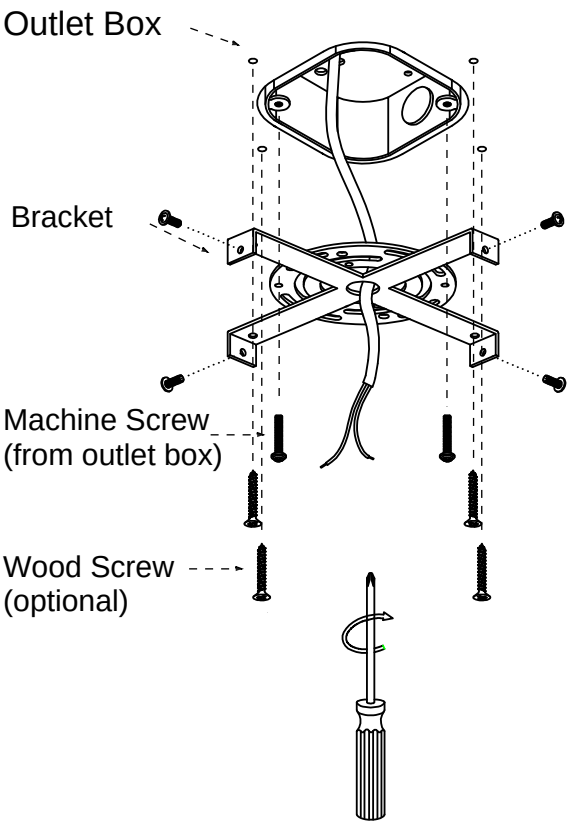


OR


Option 2

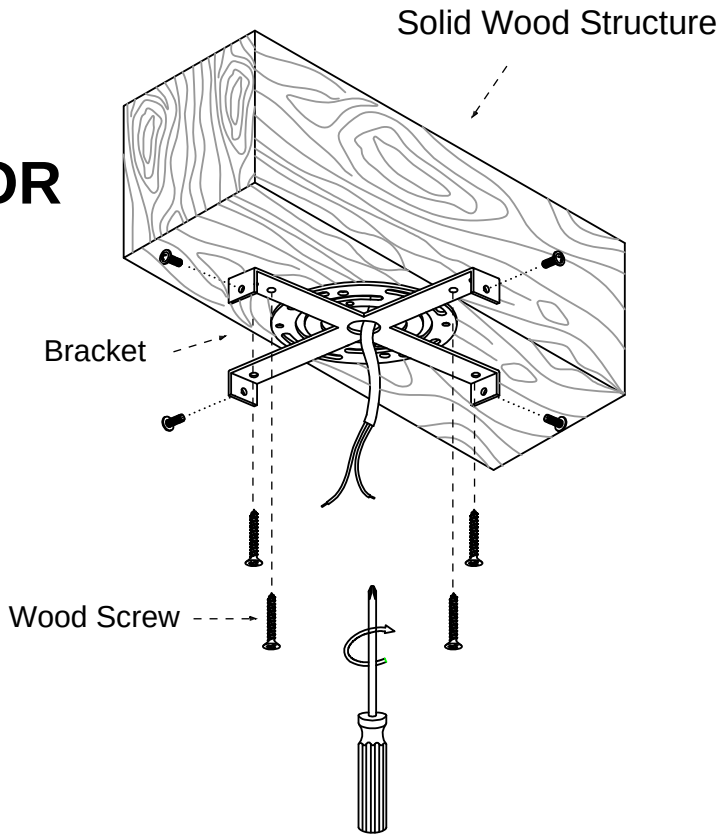

Installation Step 2 (Connect the Wires)

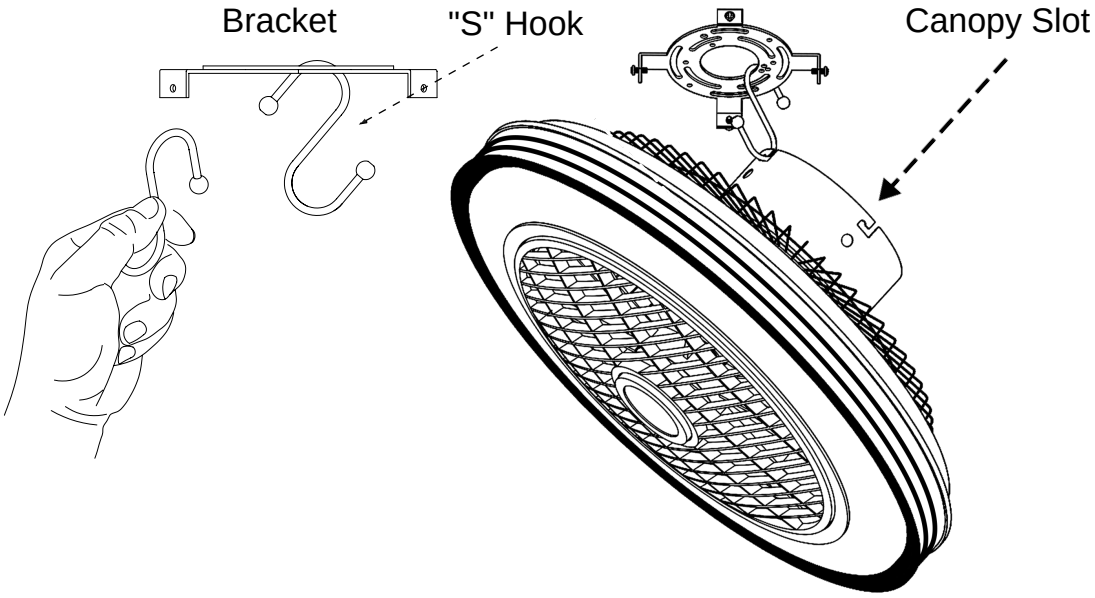


1. Hang the fixture onto the bracket with "S" hook provided.

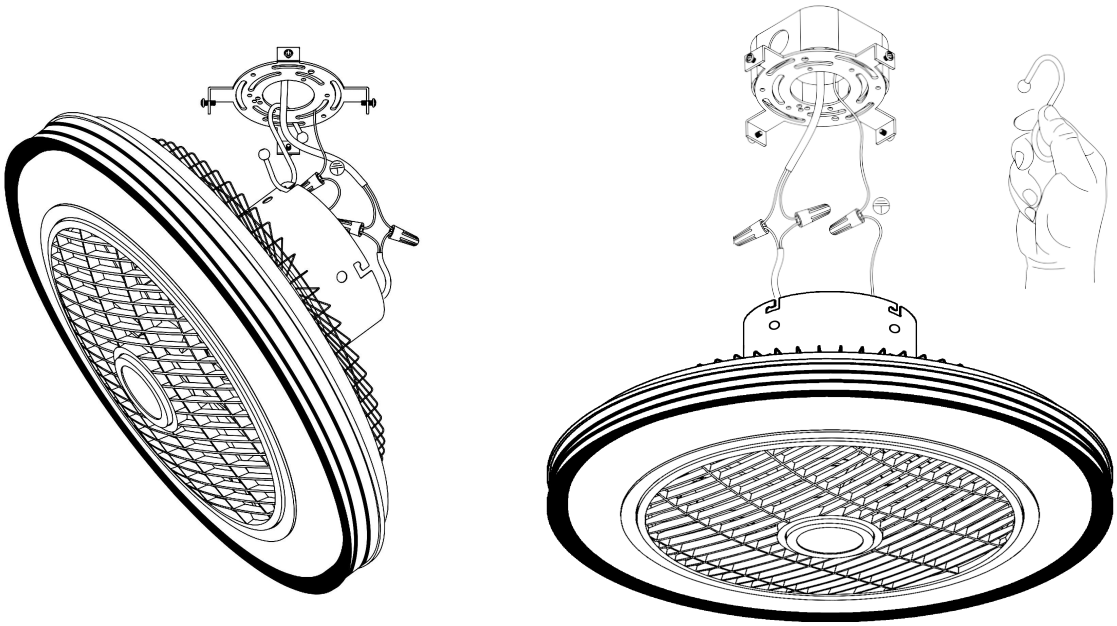

2. Connect wires from the fixture to the wires from outlet box with wire nuts, ground wire (green, green/yellow or bare copper) to ground wire, neutral wire (white or blue) to the neutral wire, hot wire (black or brown) to the hot wire. Wrap the connection with electrical tape.


3. Take away the "S" hook.

Installation Step 3 (Fix the Canopy)

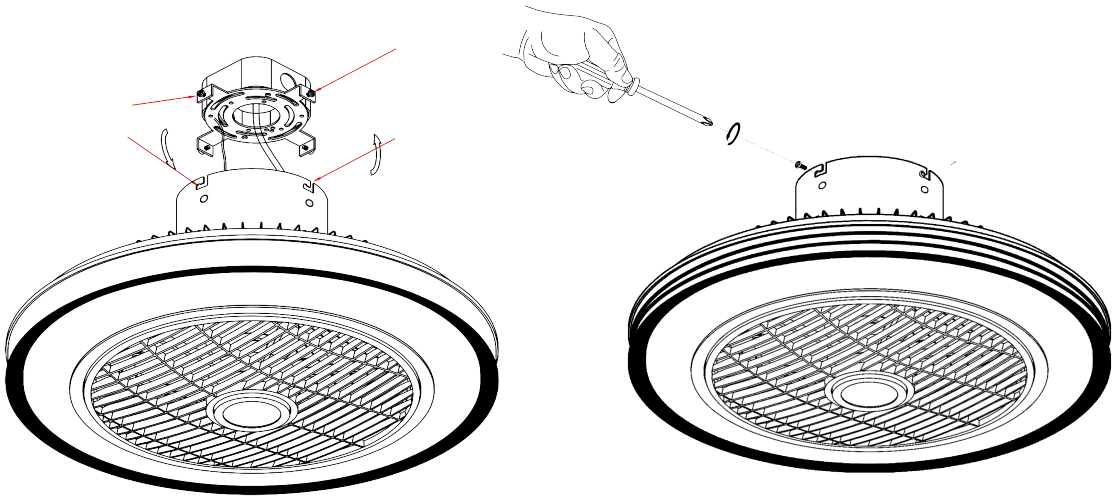

1. Fix the bracket screws onto the bracket but not tighten them.
2. Align the "L" slots from the canopy to the screws on the bracket, rotate the canopy to lock it onto the bracket.
3. Tighten the screws.

Installation Step 4 (Install the Remote Holder)

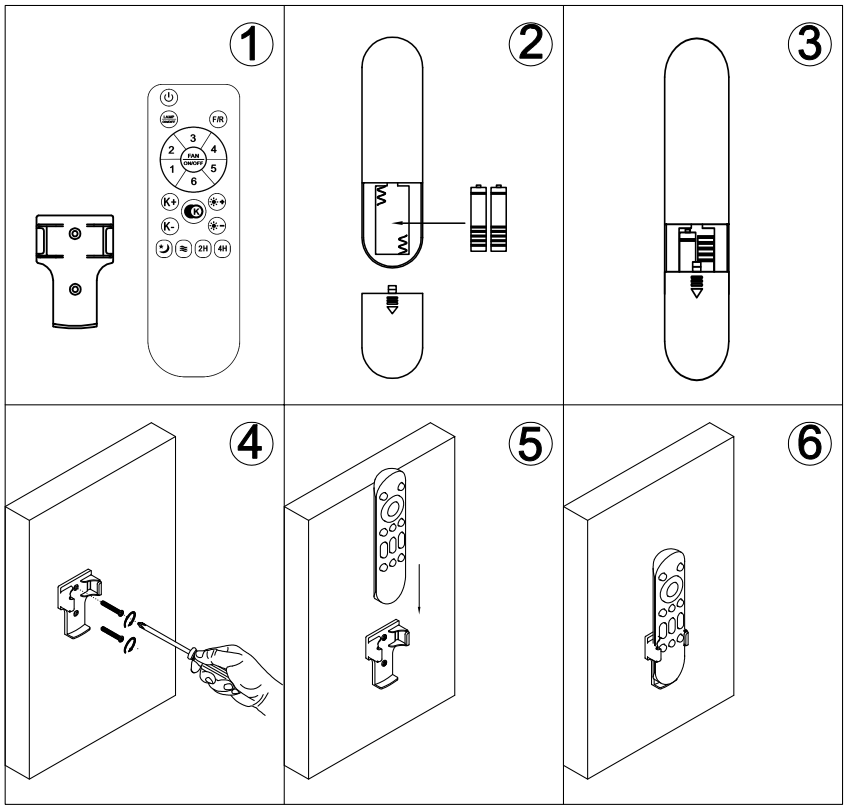

1. Insert 2 batteries before using:
AAA 1.5V battery x 2pcs (not included)
2. Install the remote holder onto the wall with screws.

2.4G DC Fan Lamp Controller Specifications

Product Introduction:

This product uses 2.4G wireless digital remote control technology, remote control one–to–one control, simple and convenient operation, strong anti–interference ability.

Technical Parameters:

Model: 2.4G AC fan light controller

Wall switch sequence:

full light/white light/yellow light

Input voltage:

AC100V – 130V 50/60Hz

Output voltage: DC70 – 110V

LED output power: 25–36W

Motor rated power: <25W


Wind speed: 1 – 6 gears

Timing: 1 hour / 2 hours

Receiving method: RF2.4G

Remote control distance: 8–20 meters

Remote control battery: No. 7 1.5V X2

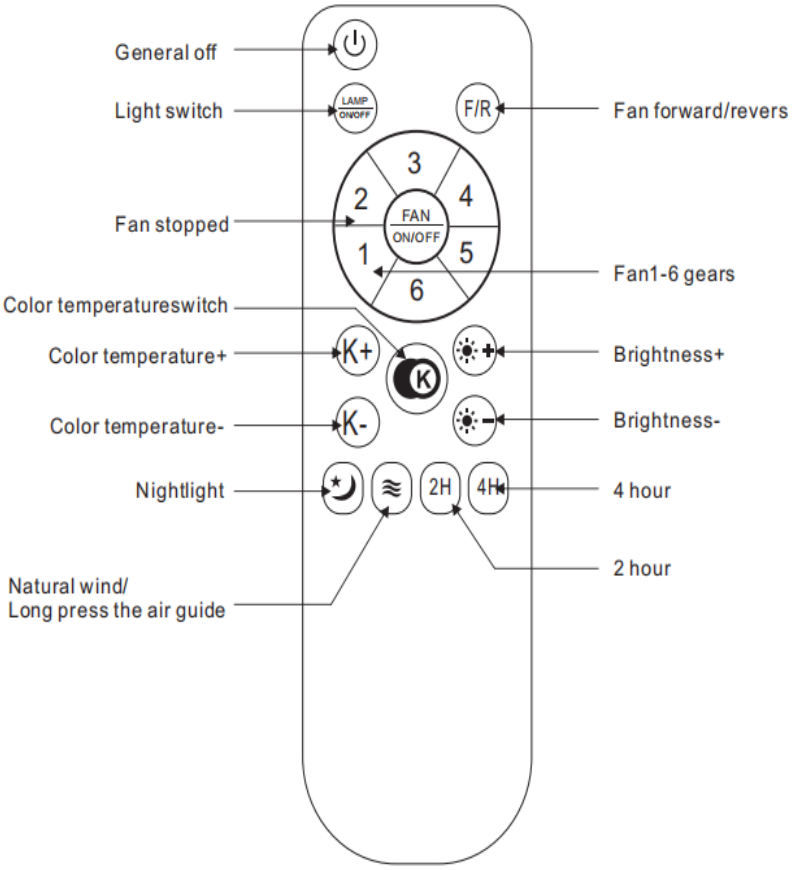


Remote control matching code:

Turn on the power and Press and hold the light pairing key within 5 seconds of the light on,When you hear a beep or a light flashes, the code match is successful.If you need to match the code a second time, you need to wait 30 seconds before turning on the power and repeat the above operation.

CAUTION:

The electronic switch is not an isolated product and needs to be operated by professional personnel during installation.

The electronic switch is triggered by the remote control, and the wireless frequency of the remote control transmitter is 2.4GHz.

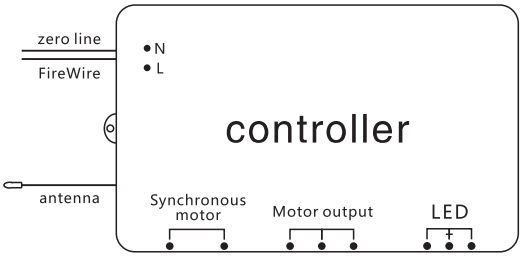

APP operation

1. Download the APP 

scan the QR code → open the browser → select the version to download

2. Open the APP → select a room → Click on ⊕ → select "fan light"→ enter the equipment name (such as fan light) → OK

3. Click on enter

1. Language (Chinese and English can be selected)

2. Scan (scan the other party's QR code to share device control)

3. My QR code (you can share it with the other party)

4. Room management (room name can be added)

5. Instructions (Choose the second interface fan light, instructions for using various symbols of the device)

6. Check for updates

7. Feedbackpoint to enter

APP button function description:

1.  Code matching button (click this button within 5 seconds of turning on the light, such as the light source flashing or the buzzer "di", it proves that the pairing code is successful;if the pairing code fails, repeat this operation).

2  After clicking, you can choose a time to turn off the device regularly.

3  After clicking, the wind blown by the fan is like the wind in nature.

4  The wind blown by the fan after clicking is suitable for sleep.

5  After clicking, the fan will rotate in the reverse direction.

6  Click to change the direction of the wind.

7  After clicking, the fan will rotate forward.

8  After clicking, the white light and yellow light will light up at the same time, but the brightness is only 10% of the maximum brightness.

9  After clicking, the white light and yellow light will light up at the same time, and the brightness is the maximum brightness.

10  After clicking, only the yellow light will light up, and the brightness is the maximum brightness.

11  After clicking, only the white light will light up, and the brightness is the maximum brightness.