1.Turn off the power.

2.Unscrew the loop (E) on the mounting plate (D).



Accessories:

3.Opening the hanging chain (H), then loose two ends of the K/D Rings (G) and the K/D Rings (G) is still on both ends of the hanging chain (H).

4.Wires go through the K/D Rings (G), the hanging chain (H), the loop (E), the canopy (F)and the mounting plate (D) , pull out the wires. Twist the two K/D Rings (G) (up and down) and the hanging rings tightly, and so does the hanging ring (I) and the light frame.

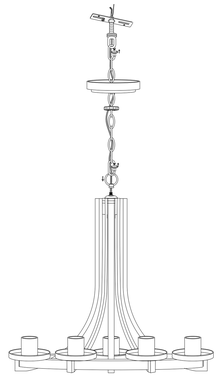

5.Lift the whole light upward, install the mounting plate (D) with two screws (B) on the junction box (A), fix the screws tightly.

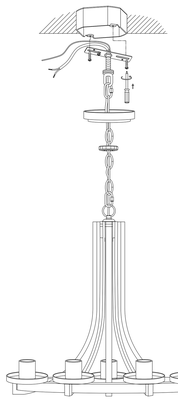

6.Positive and negative poles, the ground wire should all be connected to the wire correspondingly, and the electric tape wraps the wires and the wiring caps (C).



7.Screw tightly the canopy (F) with the loop (E) and hang up the whole light.



8.Install the glass shade(K).



9.Install the bulbs(M)(Not included).



E26 5*MAX 60W

10.Finished,turn on the light.





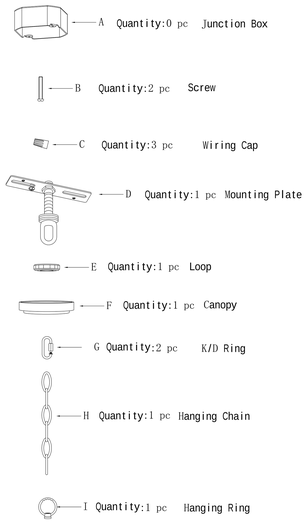

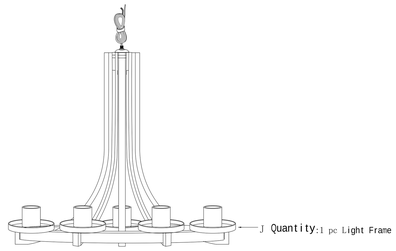





Notice:

This light fixture shoud be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect items and contents carefully. If any damage or defect is found, do not install it.