

Installation manual


D15. 8"H17. 3"L3

Installation instructions:

- 1.Install the rod (P11) on the lampbody (P16).
- 2.Use the finial (P10) to fix the metal bend slice (P9) with rod (P11) and the metal frame(P17) together
- 1.Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2.White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3."E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4.Secure mounting bracket to the junction box.
- 5.Insert screws(P2) in side of top unit the mounting bracket.
- 6.Fix the loop (P3) to screw tube , then cover the canopy (P4) and fix it by canopy ring(P5).
- 7.install the lampshade (P13) on the lampholder(P15) , then put the metal ring (P14) and use lampholder cover(P12) and lamphoder outer ring to fix the glassshade.
- 8.Install the bulbs(not included) into the lamp fixture.

PARTS LIST

The end!

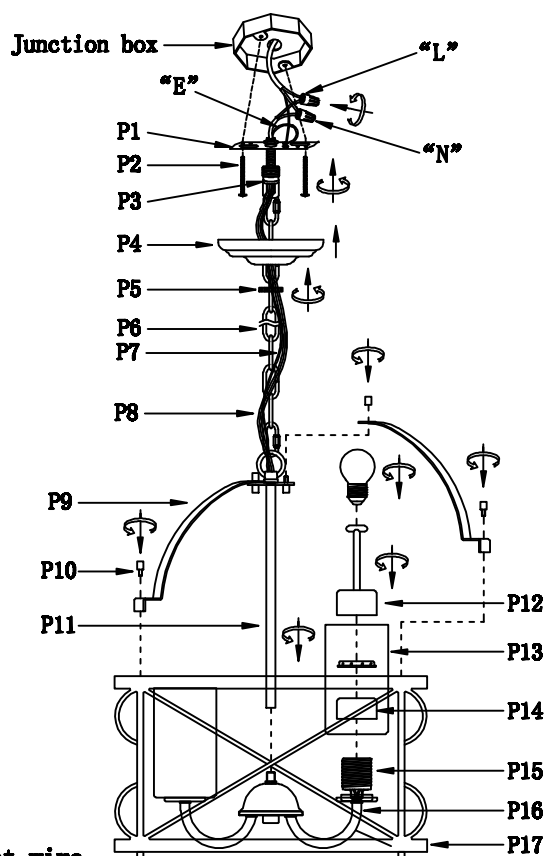

part	picture	Description	Qty	Check list
P1		L4" Mounting bracket	1	
P2		5/32-32 Screw	2	
P3		Canopy loop (Canopy part)	1	
P4		ø5.3" canopy plat	1	
P5		Canopy ring (Canopy part)	1	
P6		L59" Plain Design	1	
P7		ground wire	1	
P8		Power Cord 79" SPT-1-18# Brown	1	
P9		metal bend slice	3	
P10		finial	12	
P11		L13" rod	1	
P12		lampholder cover	1	
P13		D3.2"H5.5" glass lampshade	3	
P14		D2"H1" metal ring	3	
P15		E26 lampholder	3	
P16		D10.7"H4.5" lampbody	1	
P17		D15.8"H9.3" metal frame	1	

"L" = Hot wire
"N" = Neutral wire
"E" = Ground wire