

VEVOR[®]

TOUGH TOOLS, HALF PRICE

Technical Support and E-Warranty Certificate

www.vevor.com/support

Bellman's Cart

We continue to be committed to provide you tools with competitive price. "Save Half", "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us if you are actually Saving Half in comparison with the top major brands.

VEVOR®

TOUGH TOOLS, HALF PRICE

Bellman's Cart



MODEL: X-126



MODEL: X-112



MODEL: X-109-6



MODEL: X-109-8



MODEL: X-127



MODEL: X-113

NEED HELP? CONTACT US!

Have product questions? Need technical support? Please feel free to contact us:

Technical Support and E-Warranty Certificate
www.vevor.com/support

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

INSTRUCTIONS

Thank you very much for choosing this **Bellman's Cart**.

- Please read all of the instructions before using it. The information will help you achieve the best possible results.

The products carried in this catalog may be different in color than the actual item.

WARNING:

1. Please do not put it near flammable materials.
2. DO NOT SIT OR STAND ON THIS ITEM, and it is forbidden to carry people in any condition.
3. Overload is strictly prohibited.
4. Don't move too fast when passing pothole areas.
5. This product is not a toy. Do not allow children to play with or near this item.
6. Do not lift while loaded.
7. Use as intended only.
8. Inspect before every use; do not use if parts are loose or damaged.

Assembly Precautions

1. Assemble only according to these instructions. Improper assembly can create hazards.
2. Wear ANSI-approved safety goggles and heavy-duty work gloves during assembly.
3. Keep the assembly area clean and well-lit.
4. Keep bystanders out of the area during assembly.
5. Do not assemble when tired or when under the influence of alcohol, drugs, or medication.
6. Assemble on a flat, level, hard, and smooth surface capable of safely supporting a fully loaded cart.

SAVE THESE INSTRUCTIONS

MODEL AND PARAMETERS


MODEL	X-126	X-112	X-109-6	X-109-8	X-127	X-113
Maximum load (lbs)	800	1200	1100	1500	600	750
Wheel size (inch)	6	8	6	8	8inch*2	6
Number of wheels	4	4	4	4	+5inch*1	4

ASSEMBLY AND USE

To avoid staining the carpet and damaging the decorative frame, it is recommended to pad on the wrapper or a clean mat.


X-126:

X-126

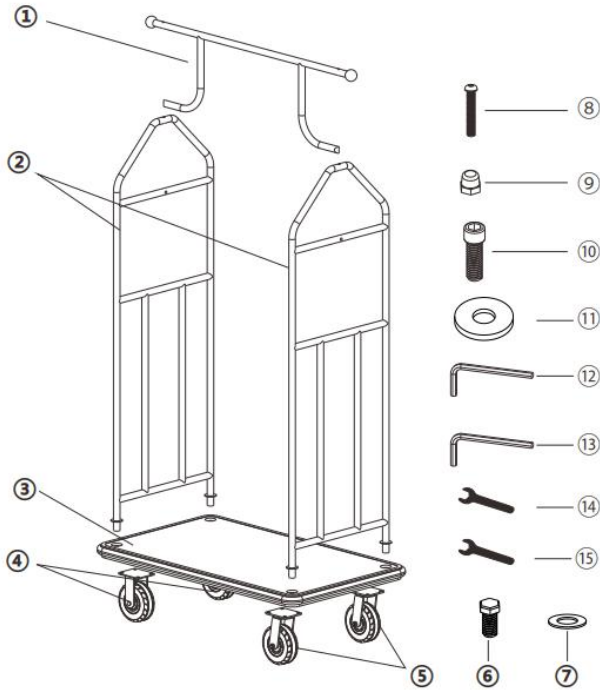


- | | | |
|-------------------|--------------------|-------------------|
| ① Top tube*1 | ② Side frames*2 | ③ Base plate*1 |
| ④ Fixed Wheels*2 | ⑤ Swivel wheels *2 | ⑥ M8*20 Screws*16 |
| ⑦ Ø8 Washers*16 | ⑧ M8*55Screws*4 | ⑨ Round nut *2 |
| ⑩ M10*30 Screws*4 | ⑪ Ø10 Washers*4 | ⑫ 5mm Wrench *1 |
| ⑬ 8mm Wrench *1 | ⑭ 13mm Wrench *1 | ⑮ 14mm Wrench*1 |

1.Assemble the wheels

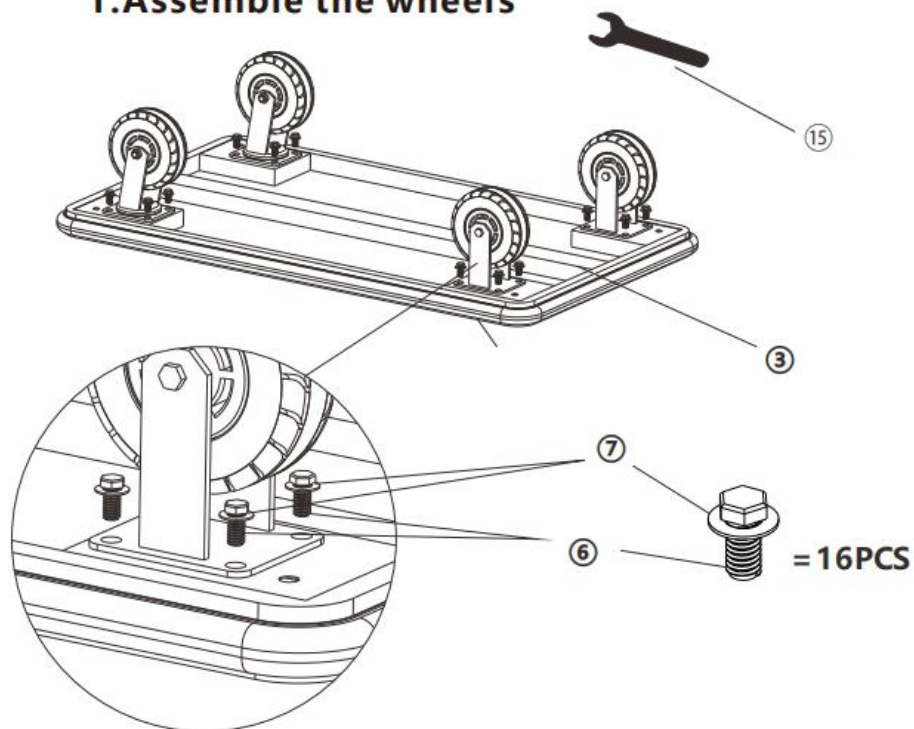

2.Assemble the frame

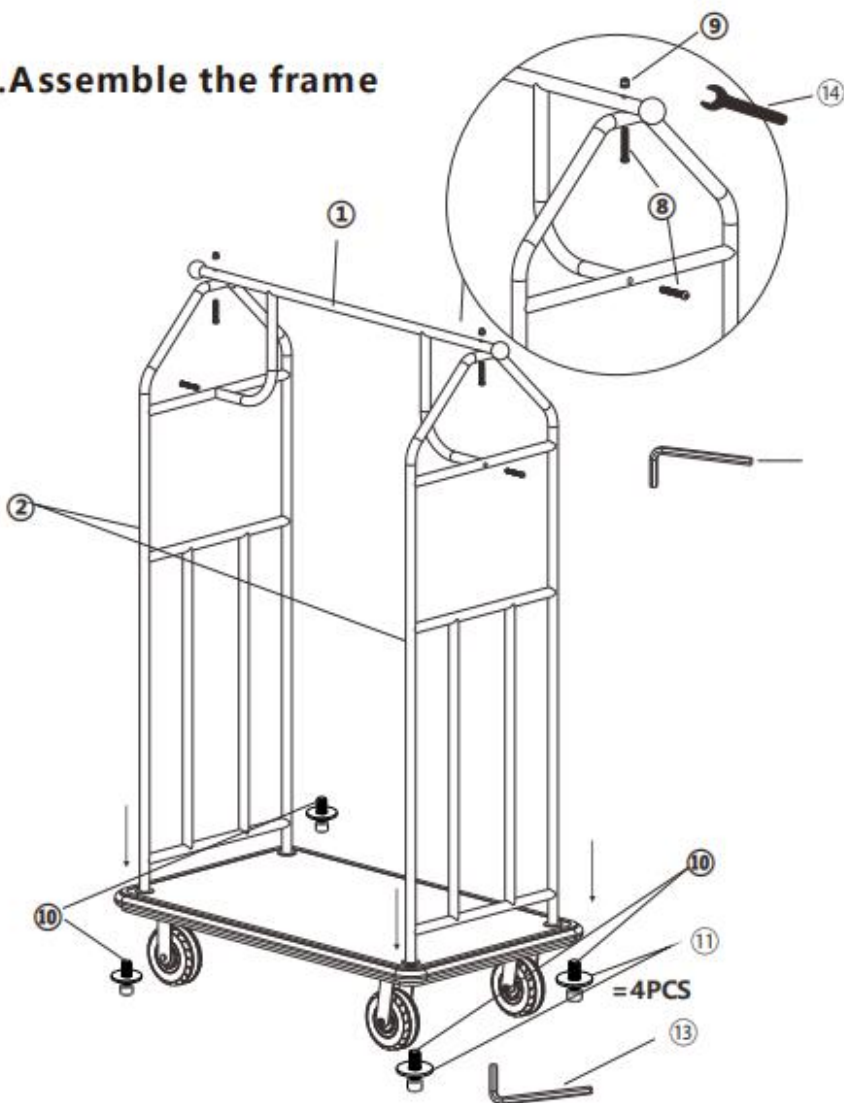


2.1 First, insert ②Side frame into the Base plate, Preinstall ⑩the screws and ⑪ Washers, Do not completely tighten the screws yet.

2.2 Install ①Tube and ⑧M8*55screws and ⑨Round nut ,completely lock the screws.

2.3 Tighten ⑩the screws*4.


X-112:

X-112

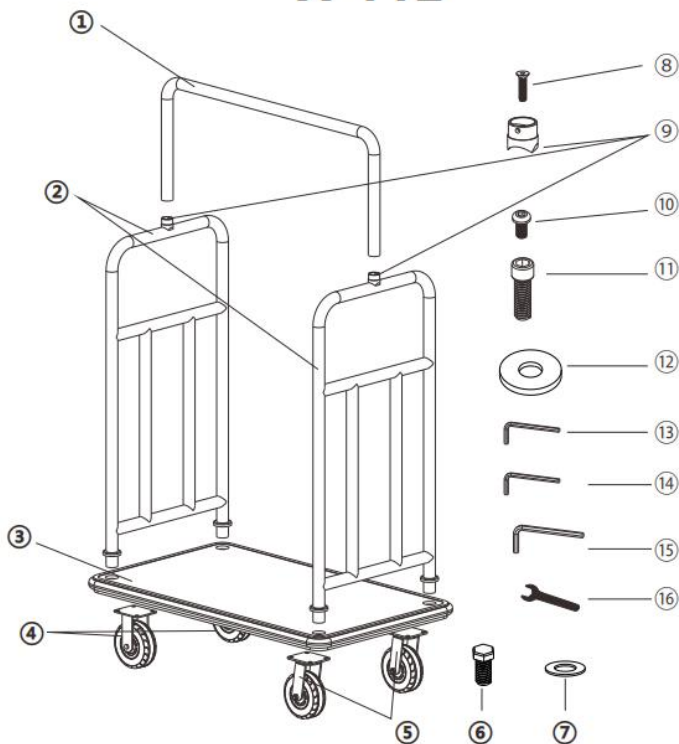


- | | | |
|---------------------------|-----------------------------|-------------------|
| ① Top tube*1 | ② Side frames*2 | ③ Base plate*1 |
| ④ Fixed Wheels*2 | ⑤ Swivel Wheels *2 | ⑥ M8*20 Screws*16 |
| ⑦ Ø8 Washers*16 | ⑧ M8*30 Screws*2(preloaded) | |
| ⑨ Fastenings(preloaded)*2 | ⑩ M6*12 Screws*2 | ⑪ M10*30 Screws*4 |
| ⑫ Ø10 Washers*4 | ⑬ 4mm Wrench *1 | ⑭ 5mm Wrench *1 |
| ⑮ 8mm Wrench *1 | ⑯ 14mm Wrench*1 | |

1.Assemble the wheels

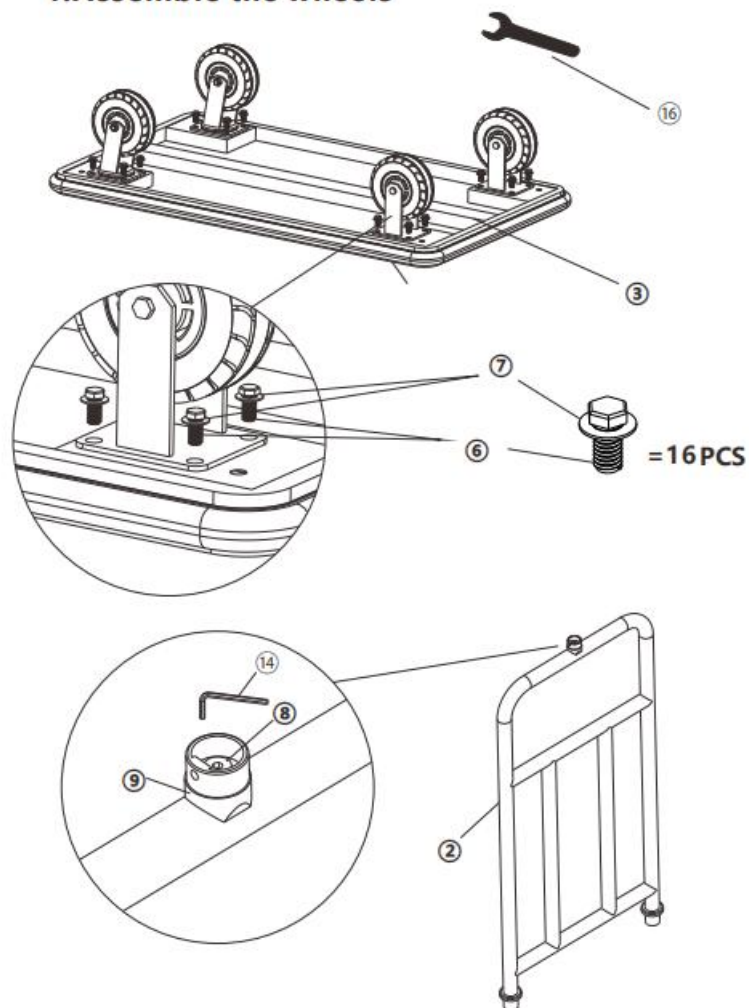

1.1 Screw ⑨ fastenings above the screws and make sure it is tight.


2.Assemble the frame

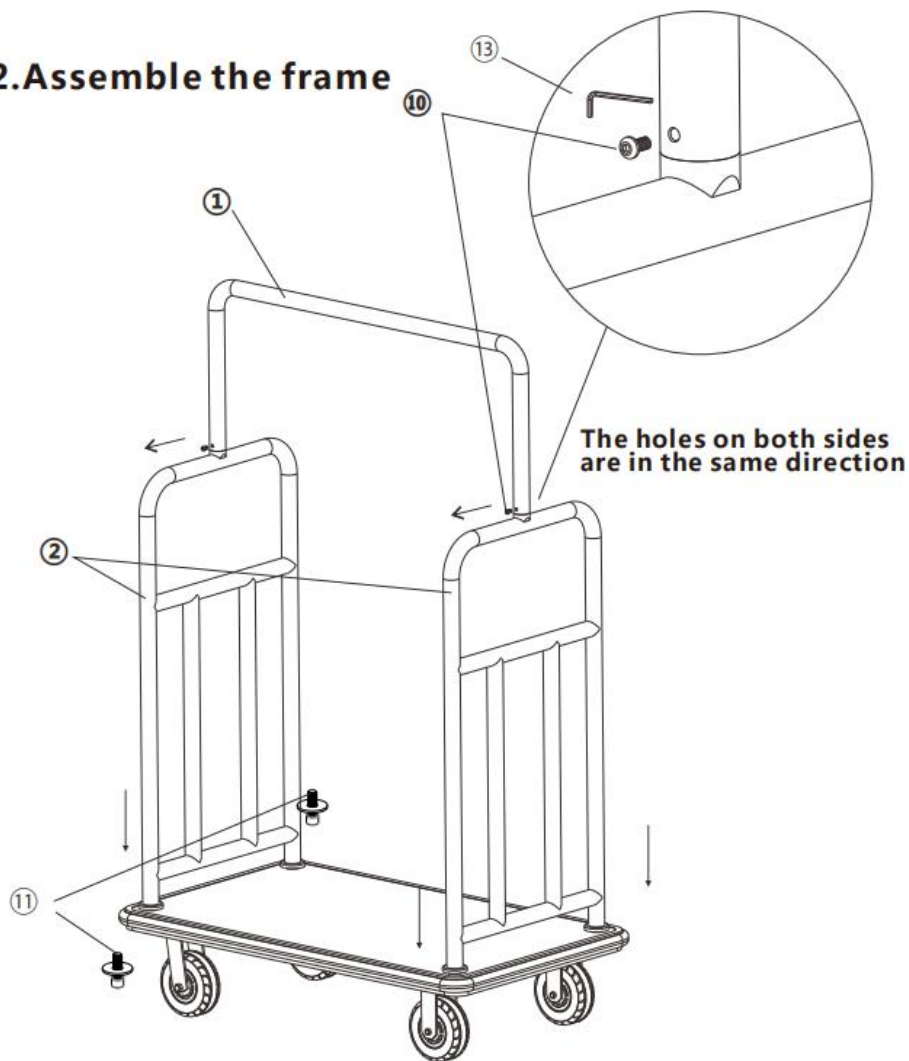

- 2.1 First, insert ②Side frames into the Base plate, Preinstall ⑪the screws and ⑪ Washers, Do not completely tighten the screws yet.(Make sure the ②Side frames are in the same direction)
- 2.2 Install ①Tube and ⑩screws ,completely lock the screws.
- 2.3 Tighten ⑪the screws*4.


X-109-6 / X-109-8:

X-109

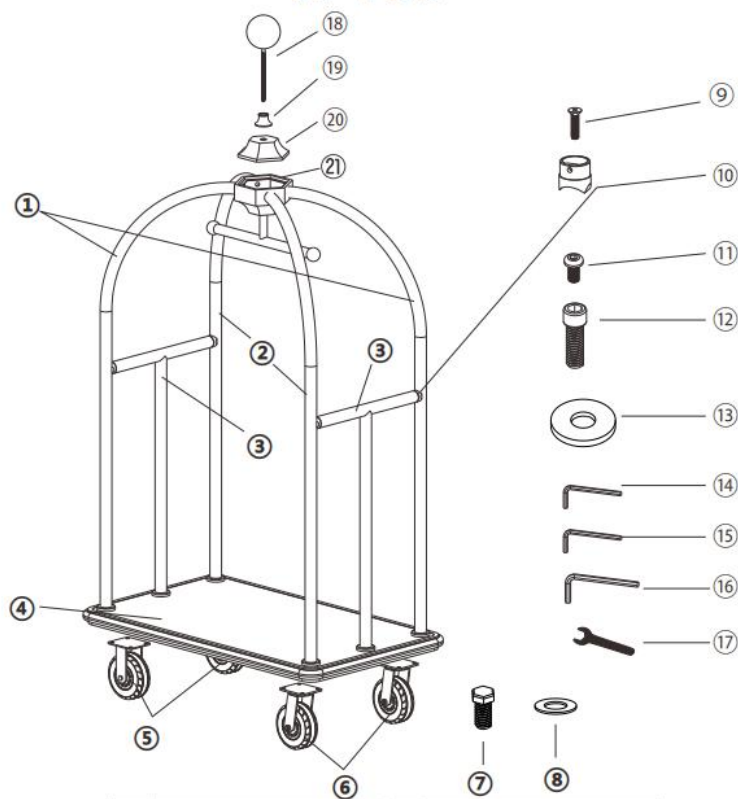


- | | | |
|----------------------|----------------------------|------------------------|
| ① Bent Tube A*2 | ② Bent Tube B*2 | ③ "T"Tube*2 |
| ④ Base plate*1 | ⑤ Fixed Wheels*2 | ⑥ Swivel wheels *2 |
| ⑦ M8*20 screws*16 | ⑧ Ø8 Washers*16 | ⑨ M8*30 screws*4 |
| ⑩ Fastening*4 | ⑪ M6*12 screws*4 | ⑫ M10*30 screws*10 |
| ⑬ Ø10 Washers*10 | ⑭ 4mm Wrench *1 | ⑮ 5mm Wrench *1 |
| ⑯ 8mm Wrench*1 | ⑰ 14mm Wrench*1 | ⑱ Ball*1 ⑲ Ball cup *1 |
| ⑳ Decorative cover*1 | ㉑ Hanging pole and hoist*1 | |

1.Assemble the wheels

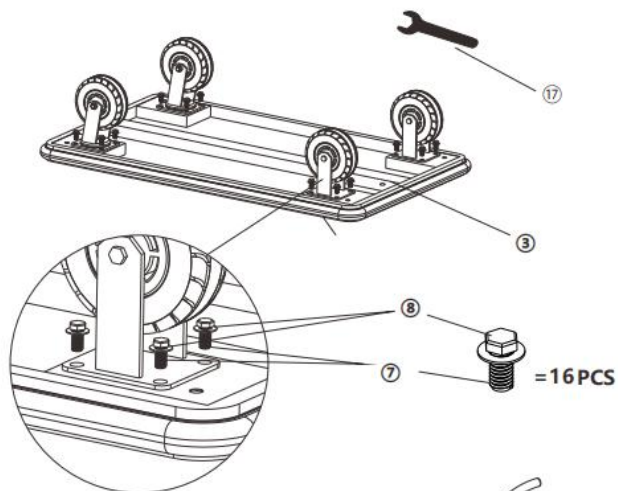


2.Assemble the bent pipe

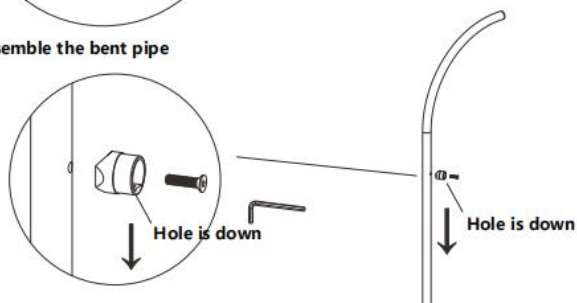


1.1 Install ⑩Fastening on ①Bent Tube A and ②Bent Tube B, making sure the screws are tight.

(Notice that the direction of the holes are downward)

2.Assemble the frame

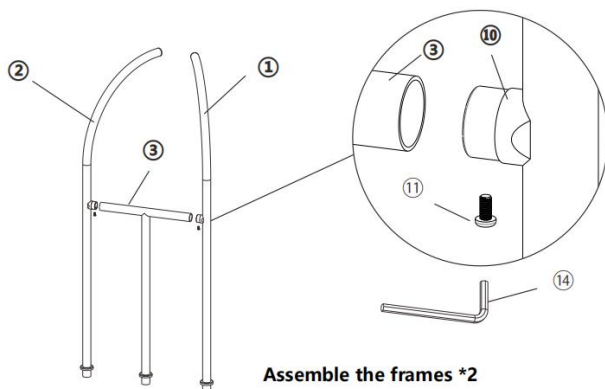

2.1 Install ①Bent Tube A and ②Bent Tube B and ③ “T” Tubes without fully tightening ⑪the screws first.

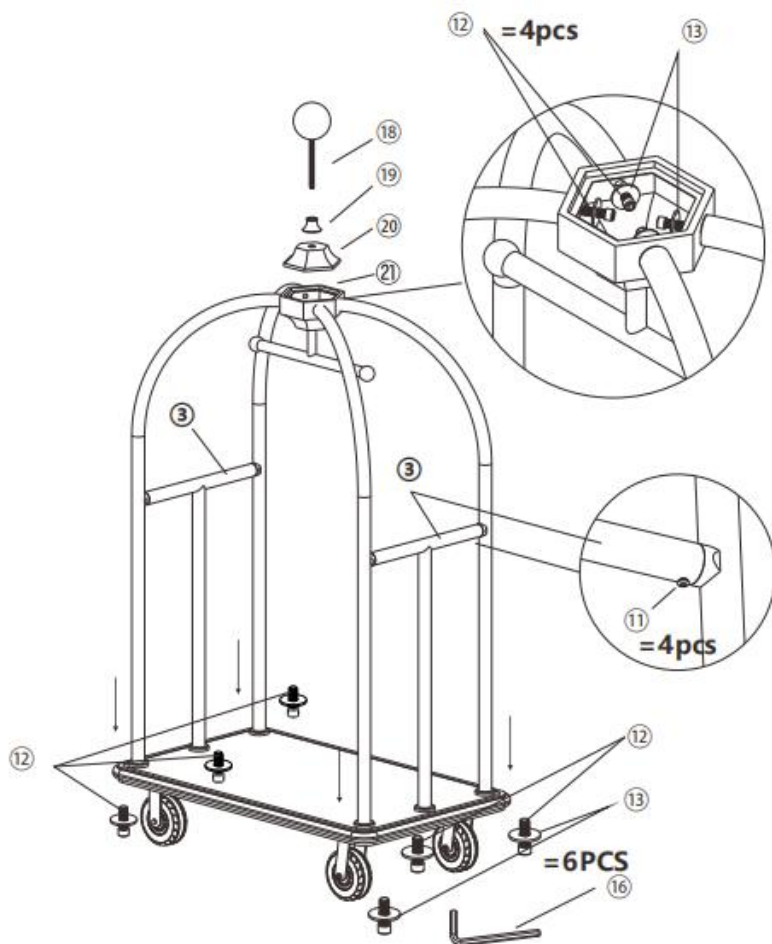

2.2 Insert the above frames assemble into ④Base plate without fully tightening ⑫the screws first.


2.3 Insert the ②Hanging pole and hoist into the above frames, assemble and fasten the ⑫screws.

2.4 Then fasten ⑪ the screws.

2.5 Install the ⑱Ball and ⑲Ball cup and ⑳Decorative cover


X-127:

X-127

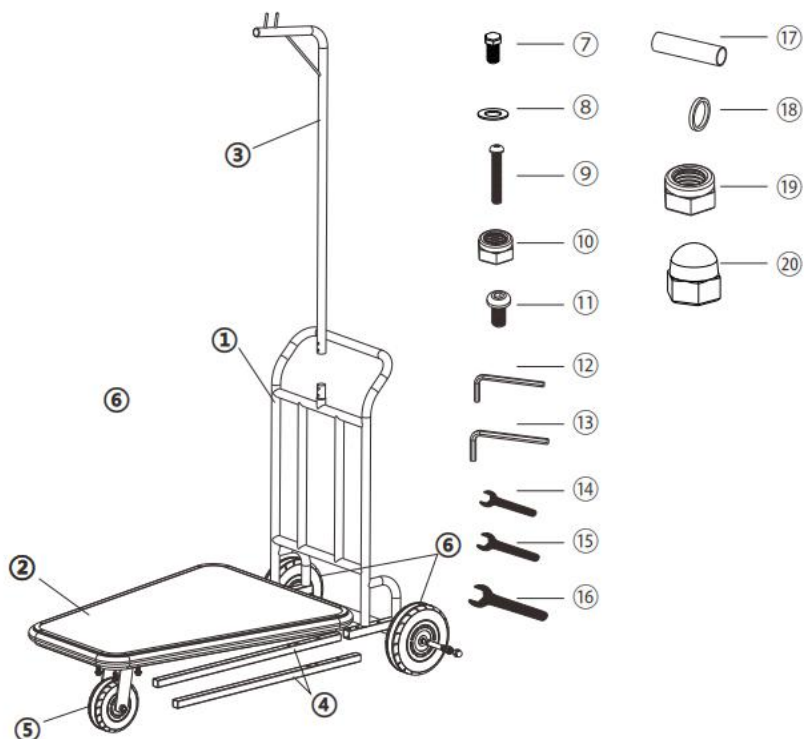


- | | | |
|-----------------|-------------------|--------------------|
| ①Frame*1 | ②Base plate*1 | ③“L”Hanging pole*1 |
| ④Square tube*2 | ⑤Swivel Wheels *1 | ⑥Fixed Wheels*2 |
| ⑦M8*20 Screws*4 | ⑧Ø8Washers*16 | ⑨M8*50Screws*12 |
| ⑩M8 Nuts*4 | ⑪M6*20 Screws*2 | ⑫4mm Wrench *1 |
| ⑬5mm Wrench *1 | ⑭13mm Wrench *1 | ⑮14mm Wrench *1 |
| ⑯19mm Wrench*1 | ⑰Sleeve*2 | ⑱Plastic Washers*4 |
| ⑲M12 Nuts*2 | ⑳Round nut *2 | |

1.Assemble the frame

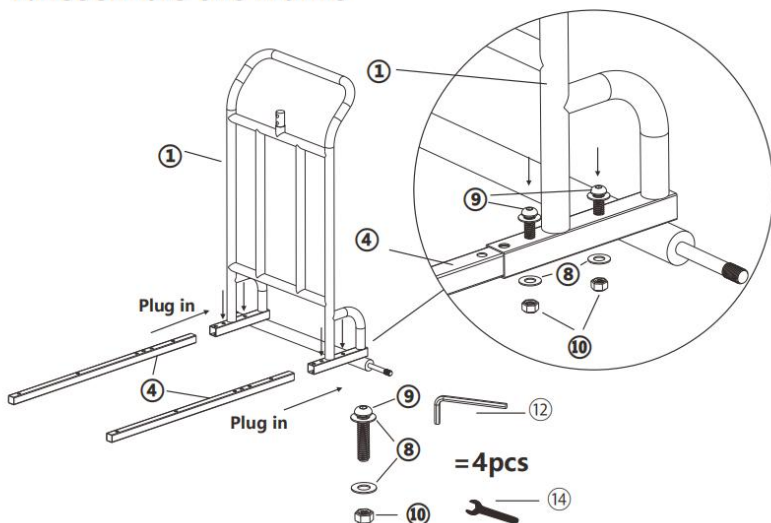

1.1 Insert ④Square tube into ①Frames without fully tightening ⑨the screws and ⑧Ø8Washers and ⑩M8 Nuts first.

2.Install on the baseplate

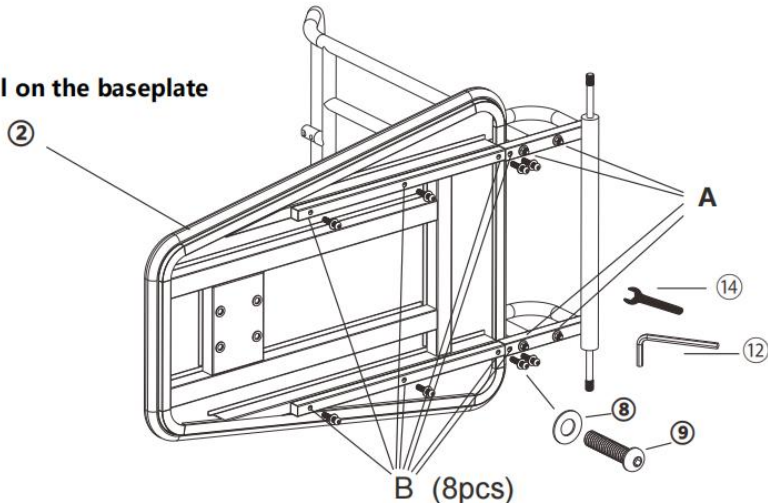


2.1 Install ⑧Washers and ⑨Screws in position B, Do not tighten completely yet.

2.2 Tighten the 4 ⑨Screws at position A.


2.3 Tighten the 8 ⑨Screws at position B.

3.Assemble the wheels

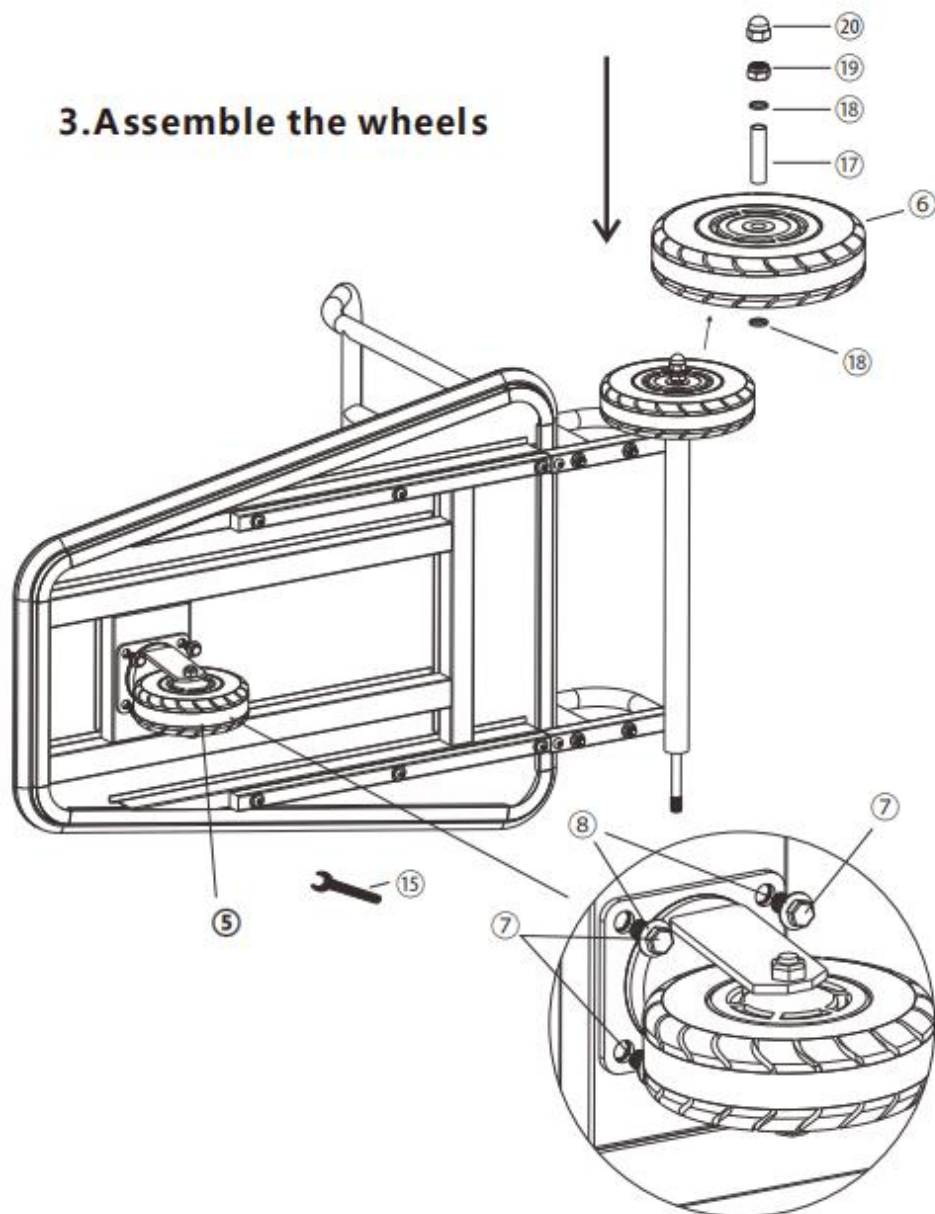


3.1 As shown above, install the wheels.

4.Install the "L" rod

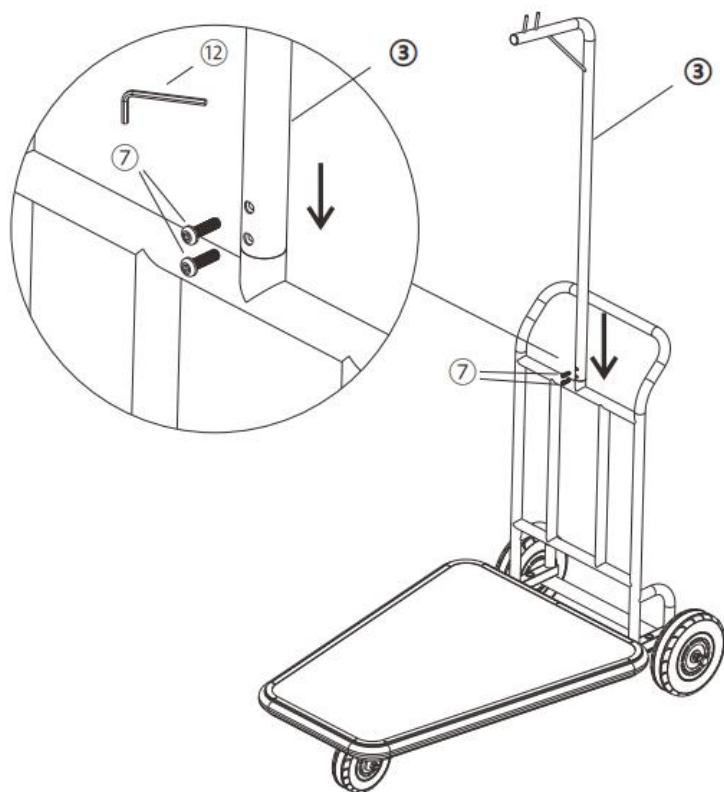

X-113

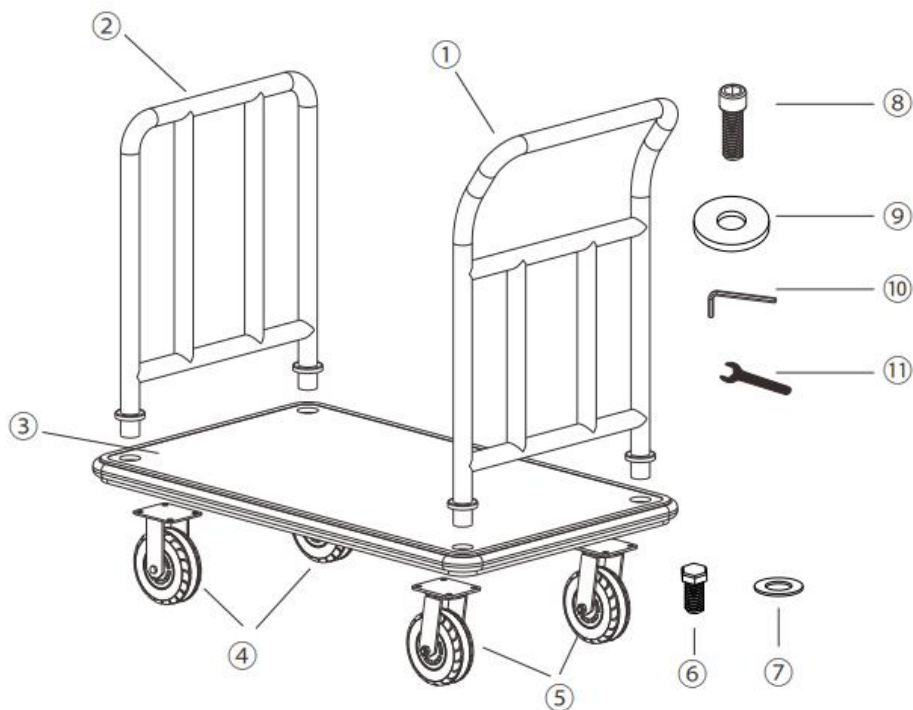

① Handrail frame*1

② Tail frame*1

③ Base plate*1

④ Fixed Wheels*2

⑤ Swivel Wheels *2

⑥ M8*20 Screws*16

⑦ Ø8 Washers*16


⑧ M10*30 Screws*4

⑨ Ø10 Washers*4


⑩ 8mm Wrench *1

⑪ 14mm Wrench *1

1.Assemble the wheels

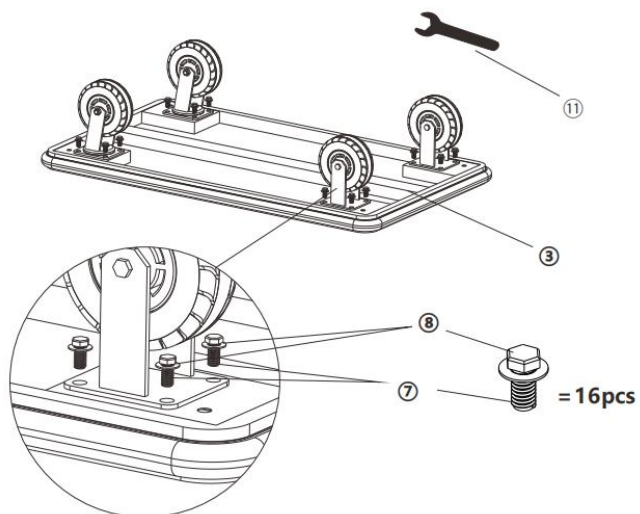

2.Assemble the frame

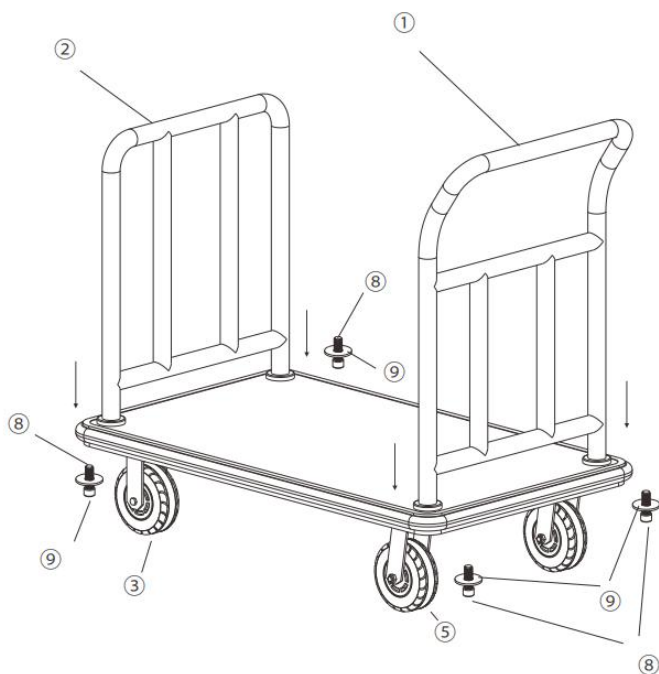

MAINTENANCE

1. Avoid prolonged exposure to the sun to avoid aging.
2. Avoid the cart from cracking due to violent impact when going uphill and downhill.
3. Check and tighten screws regularly

Address: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.

Imported to AUS: SIHAO PTY LTD, 1 ROKEVA STREETEASTWOOD NSW 2122 Australia

Imported to USA: Sanven Technology Ltd., Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730

EC	REP
----	-----

E-CrossStu GmbH
Mainzer Landstr.69, 60329 Frankfurt am Main.

UK	REP
----	-----

YH CONSULTING LIMITED.
C/O YH Consulting Limited Office 147, Centurion House,
London Road. Staines-upon-Thames. Surrey. TW18 4AX



Technical Support and E-Warranty Certificate
www.vevor.com/support