


NOTICE:
Always disconnect power supply before installation


1. Attach the hanging chain to both the lamp body and the canopy.
2. Mark the desired position on the ceiling. Fix the mounting bracket using expansion bolts. Connect the lamp's live (L), neutral (N) and earth (E) wires to their corresponding house wiring. Secure with wire connectors and wrap with electrical tape. (Note: The brass wire is the ground wire)
Attach the mounting plate using the nuts.
3. Install the spherical crystal pendants on the bottom cover as shown.
- 4/5/6/7. Install Pendants A at the designated positions shown in the diagram.
8. Attach Pendants B to the glass discs as shown.
9. Install the glass discs and candle tubes onto the lamp arms in the sequence shown in the diagram.

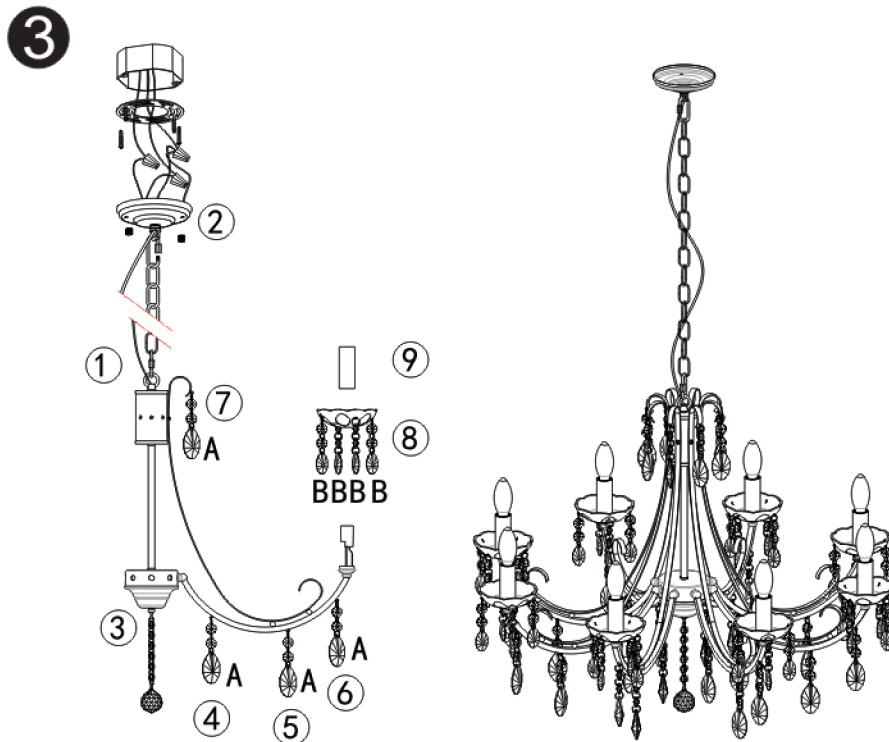

Committed to Excellence in Quality

Installation Instructions

Please Scan the QR code to watch the installation video. If you have any questions, please feel free to contact us through the order page.

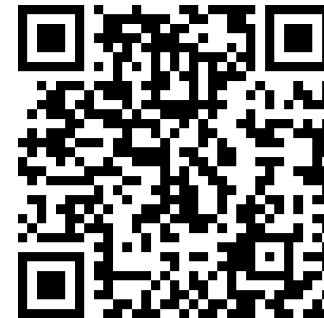

Scan the QR code to watch the installation video

Dear Customer, thank you for your order. For your safety, please have the light fixture installed by a professional electrician.



WARNING: Install the product exactly as directed in this manual. Improper installation may result in electric shock, fire, or injury.

1. Voltage: 110-240V
2. Do not install the chandelier outdoor or on unstable objects
3. If you have any question, please let us know via email, we will try our best to help you.
4. Please cut off the electricity when replacing the bulbs

Details of accessories



Lamp body
× 1



Metal branches
arm × 8



crystal pendant
labeled as A × 32
Extra Crystals
× 1



crystal pendant
labeled as B × 32
Extra Crystals
× 1



Crystal ball
pendant × 1



Light fixture metal
plate × 1



Metal hanging
chain × 1



M4×8 screws
× 10



45MM Expansion
bolt × 2




Glass shade × 8
Extra glass shade
× 1



Lock washer B
× 1



Double ended
tube × 1



Electrical box
installation
plate × 1



35MM tapping
screws × 4



Expansion screw
× 4



Lock washer A × 8



25mm Screw × 4



Nut × 1



Ground wire
× 1




Electrician cap
× 6

NOTICE:
Always disconnect power supply before installation

Unscrew the bottom cover of the lamp body.

1

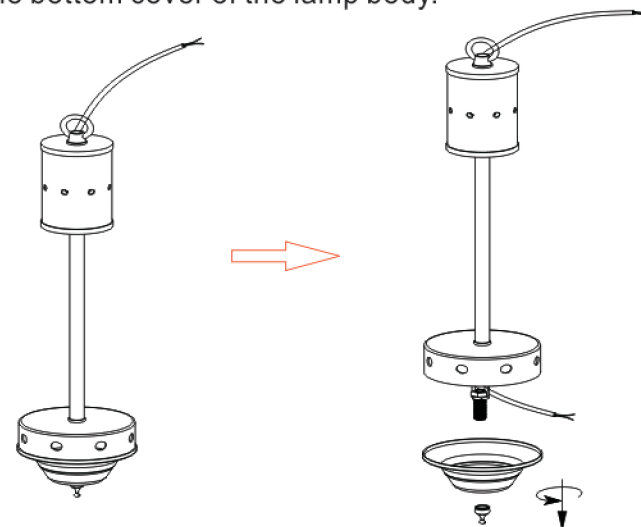

1. Secure the lamp arms with nuts on one end and M4×8 screws on the other, as shown. Install symmetrically in A-A, B-B sequence for balanced force distribution and to prevent tilting.
2. Connect the neutral (N) and live (L) wires from the lamp arms to the corresponding neutral and live wires of the main lamp body. Secure with wire connectors and wrap properly with electrical tape for safety.
3. Reattach and tighten the base cover.

2

