

K-11843

Touchless round AC valve and sensor kit

Features

- Required for Purist® and Falling Water® wall-mount touchless faucets
- Insight™ adaptive infrared technology
- 0.5 gpm (1.9 lpm) maximum flow rate
- On demand on and off. Maximum 30 second cycle time
- Ideal for use with KOHLER vessels
- Low-lead (SDWA) compliant



Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651 OBC

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 372
ADA
ICC/ANSI A117.1
CSA B651
OBC

Material

- Brass

Required Products/Accessories

- K-13480 AC single supply, global outlets
- or
- K-13480-A AC single supply, North American outlets
- or
- K-13481 Multi-outlet power supply, global outlets
- or
- K-13481-A Multi-outlet power supply, North American outlets

Technology


- Does not require battery or power cell

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



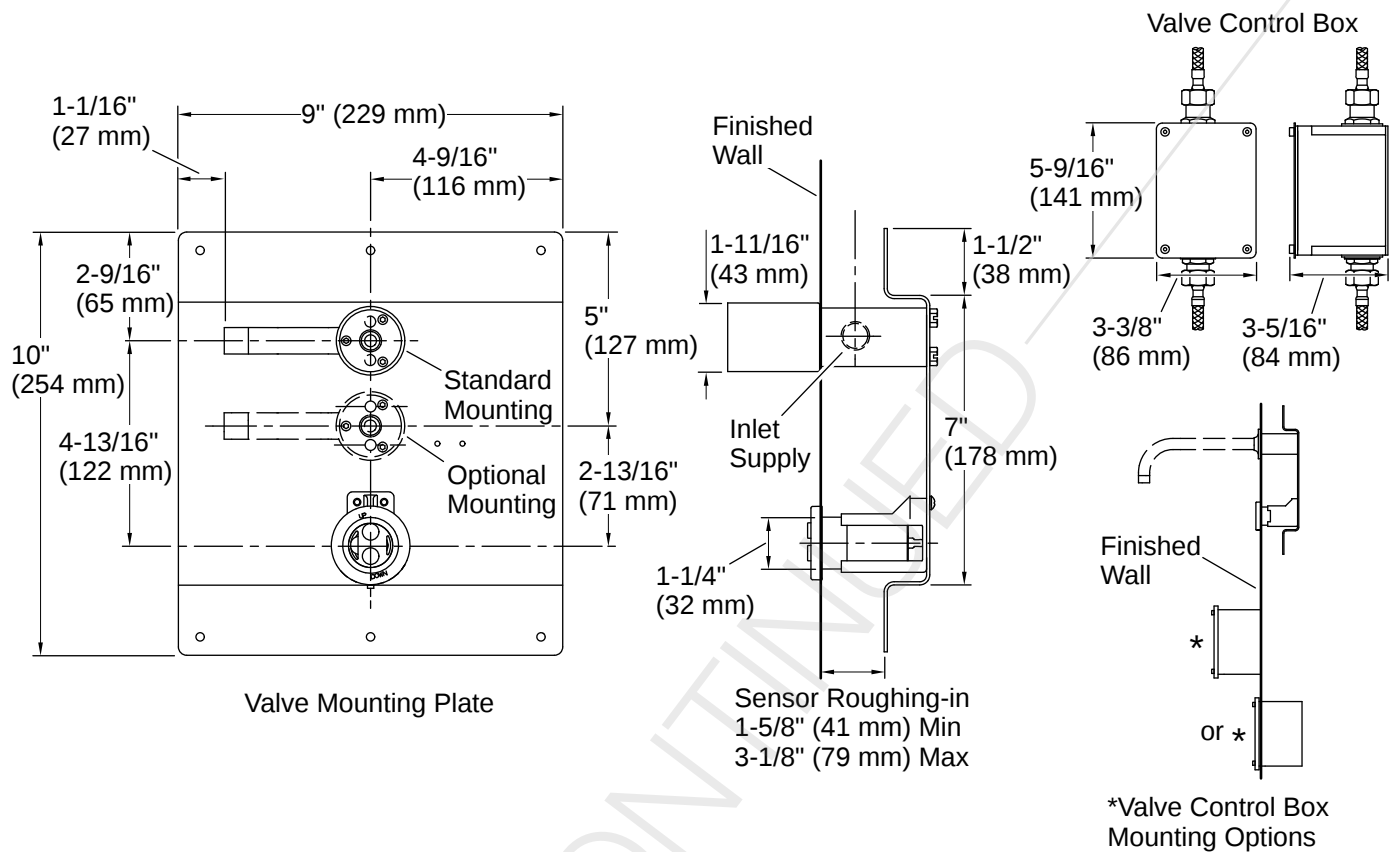

Installation

- Requires a plug-in AC power supply
- Optional spout-mounting location
- 13480-A and 13481-A power supplies are designed for North America outlets. For international outlets please use 13480 and 13481
- Valve control box includes stop valve therefore it can be connected to waterline directly. Does not require additional stop valve

Installation Notes

Install this product according to the installation instructions.

Reference the installation instructions for specific framing information.

Requires an AC power supply (not included).

For use with faucet trim: K-T11837, K-T11839, K-T11840, and K-T11841.

Valve control box can be installed in the wall or on the wall. ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

