
Outdoor Rocking Chair



AIMPORTANT

Please follow the instruction manuals and use a pad to avoid damage during assembly.

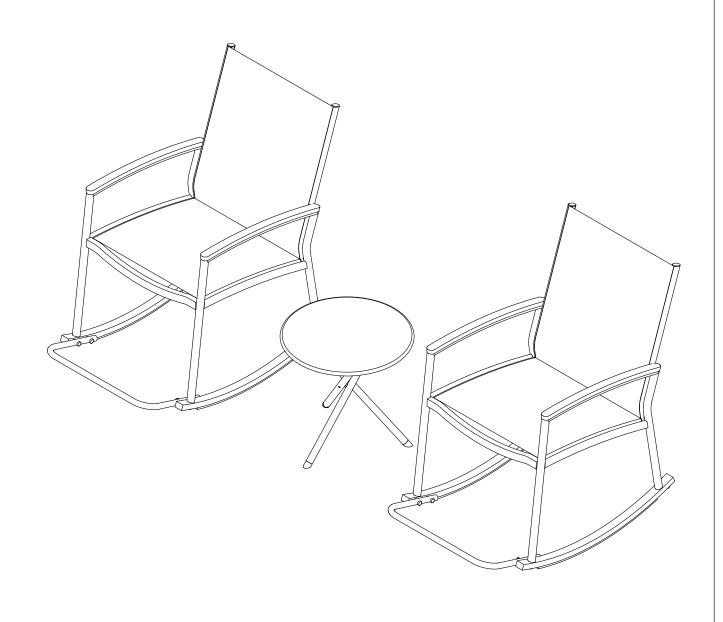

Not intended for use by children. Please keep your children closely supervised.



Keep away from fire or other heat sources.




Do not use harsh cleaner for cleaning!



We recommend wearing protective gloves for assembly.




Identify, sort and count the parts before assembly.

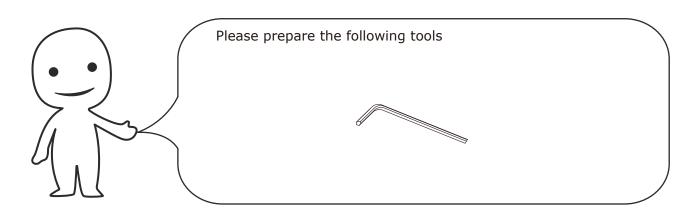









When installing, please carefully confirm whether each screw corresponds to the manual, accessories with similar shapes can be distinguished by size





















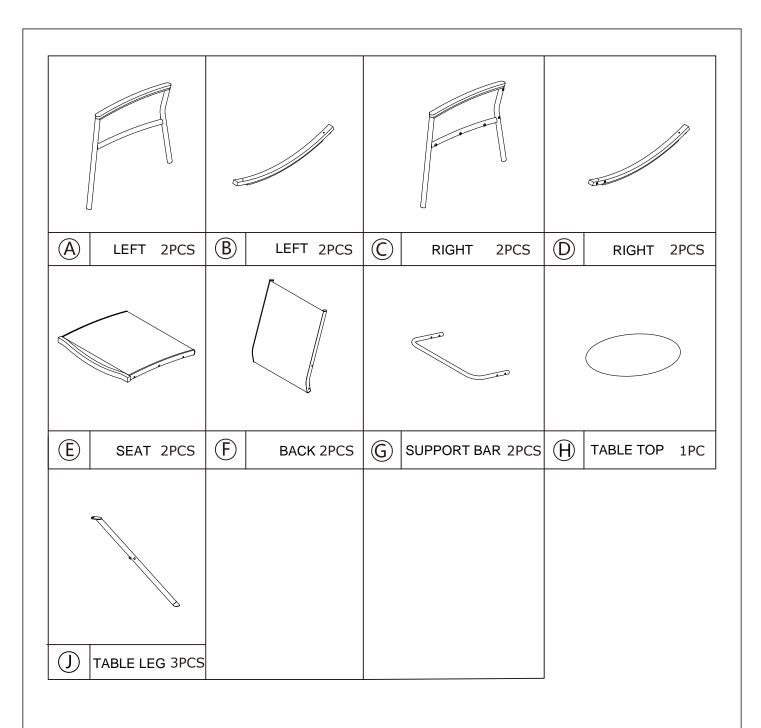

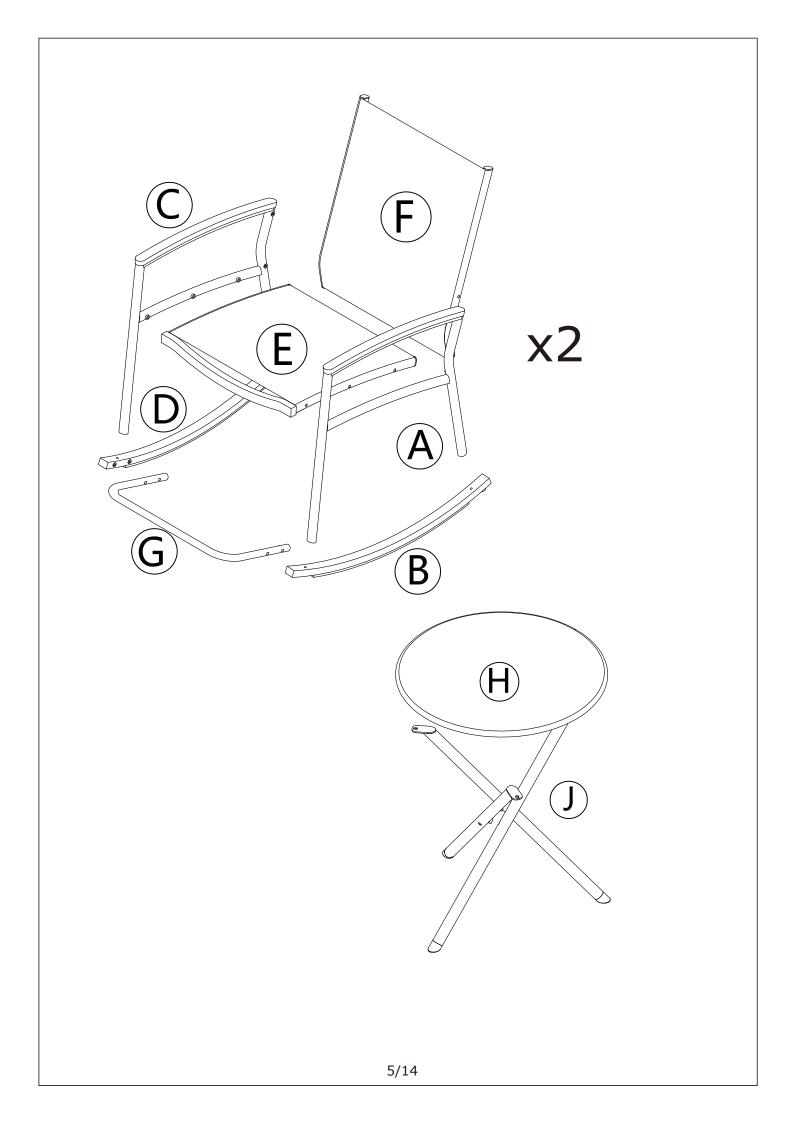





Fix part A with part B with two M6x35mm Screws (1) and (5) Flat Washers.Use (7) Allen key. **DO NOT YET TIGHTEN.**

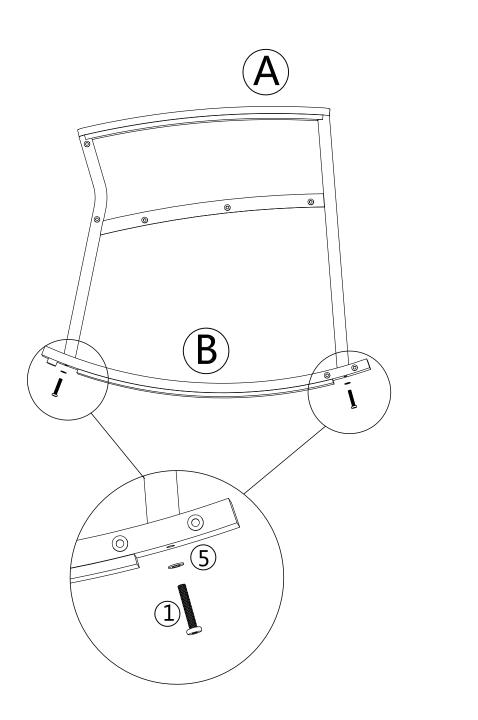


X2




Fix part C with part D with two M6x35mm Screws (2) and (5) Flat Washers.Use (7) Allen key. **DO NOT YET TIGHTEN.**

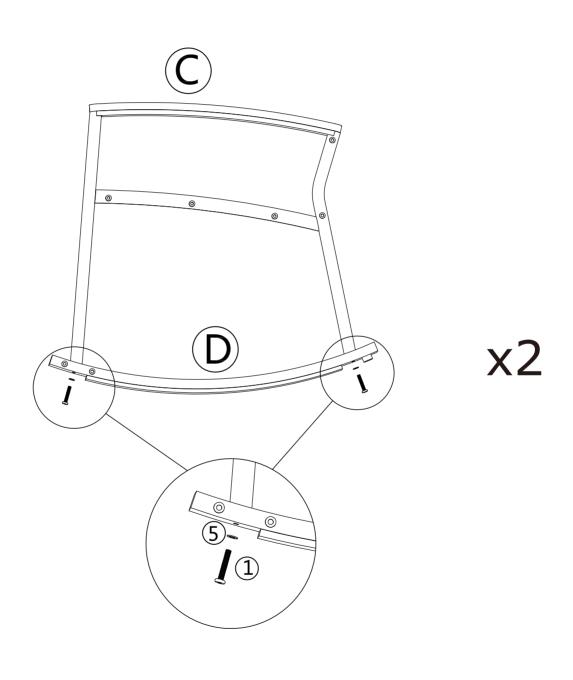





Fix part E with part A with three M6x30mm Screws (2) and (5) Flat Washers.Use (7) Allen key. **DO NOT YET TIGHTEN.**

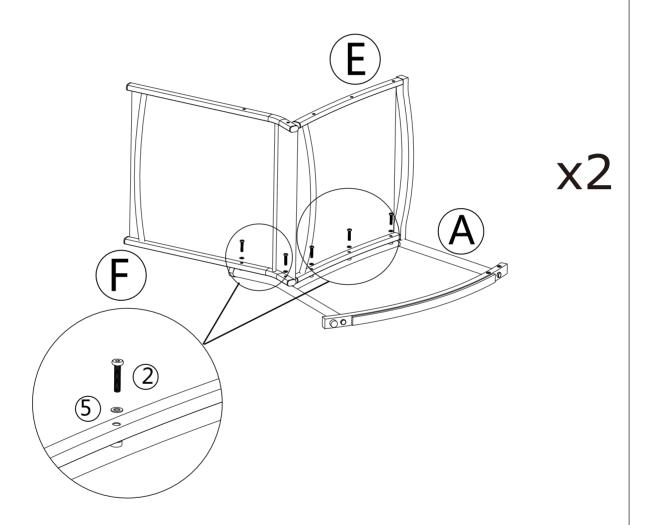


Fix part F with part A with two M6x30mm Screws (2) and (5) Flat Washers.Use (7) Allen key. **DO NOT YET TIGHTEN.**




Fix part E and part C with three M6x30mm Screws (2) and (5) Flat Washers.Use (7) Allen key. **DO NOT YET TIGHTEN.**

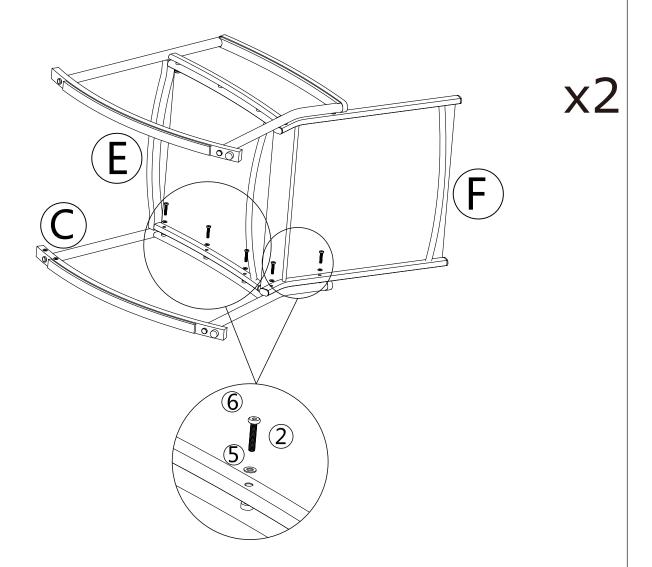


Fix part F and part C with two M6x30mm Screws (2) and (5) Flat Washers.Use (7) Allen key. **DO NOT YET TIGHTEN.**




Adjust alignments and NOW TIGNTEN ALL SCREWS with (7) Allen key.

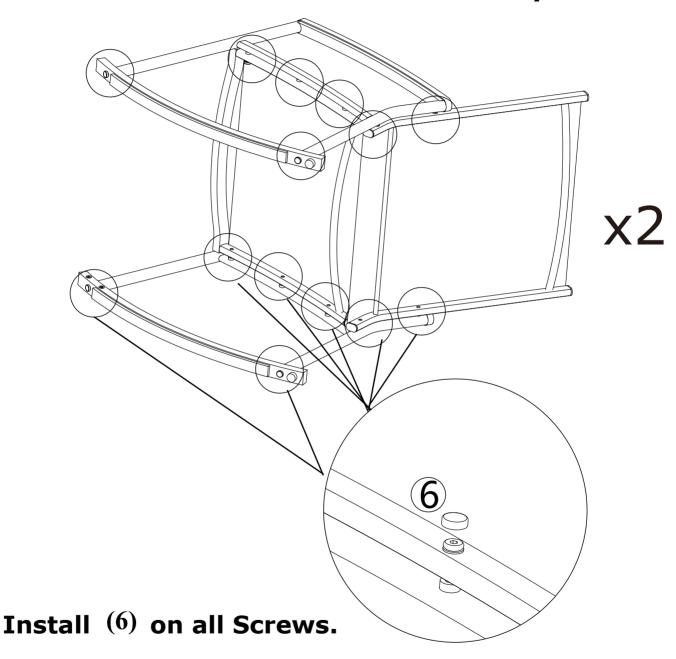




Fix part G with part B and part D with four M6x35mm Screws (1) and (5) Flat Washers. Tignten screws with (7) Allen key.

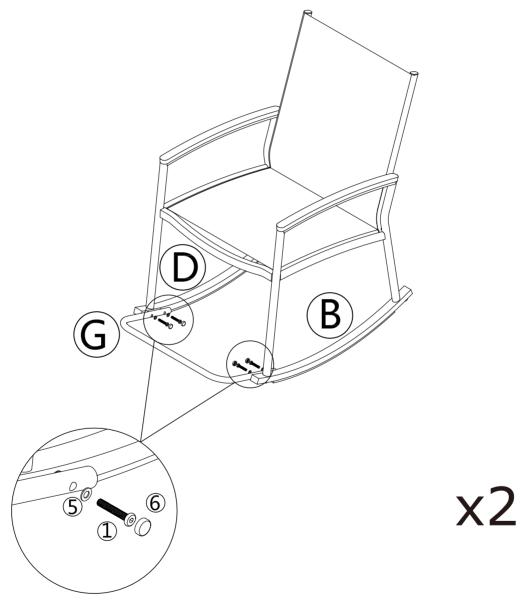



Install (6) on all Screws.




Put the table legs right. Fix leg J with part H with three M6x15mm Screws (3) and (5) Flat Washers.Use (7) Allen key.

DO NOT YET TIGHTEN.

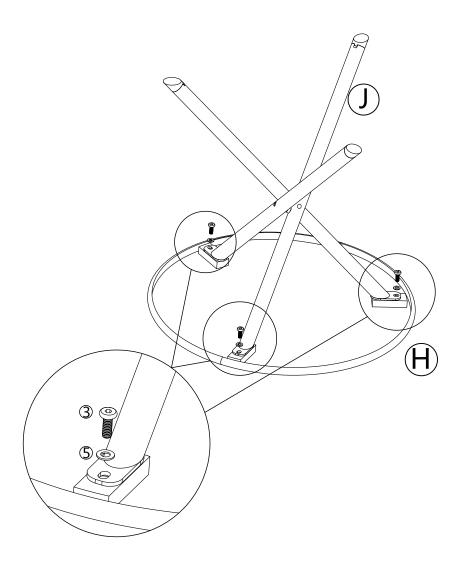



Fix leg J with three M6x15mm Screws (4) and (5) Flat Washers.Use (7) Allen key.

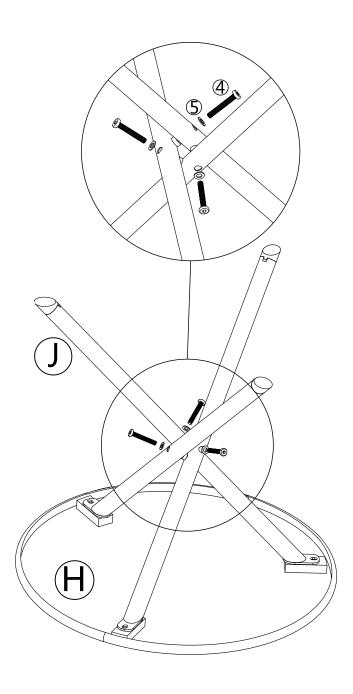



Adjust alignments and NOW TIGNTEN ALL SCREWS with (7) Allen key.

